



# S3700

**Professional Grade.  
Premium Experience.**

Get enhanced capabilities for a flawless facility

**MULTICOLOR + CUT SIGN AND LABEL PRINTER**



# Bold multicolor. Precision shape cutting.


## **SMOOTHER OPERATIONS**

Because safety and efficiency are the pulse of your operations, you need an industrial label printer that delivers both. Put multicolor brilliance, transformative shape cutting and seamless create-and-print capabilities at the heart of your labeling. Empower any user to make signs, labels and tags for just about any application. Let your labeling take shape with the BradyPrinter S3700 Multicolor & Cut Sign and Label Printer.



### **Mono or multicolor, delivered in seconds**

Easily print the colors you need. Smarter print technology enables simple 20-second changeovers of ribbons and labels for safety identification, Lean visuals, work-in-process labels and more that pop — quickly, reliably.



### **Flawless shapes, letters, arrows and more**

Transform the way you label with straighter lines, smoother curves and tighter connection points thanks to the precision XY plotter cutter. Plus, stack pipe markers and pack multiple shapes per label to minimize waste.



### **Extra-easy create and print**

Now everyone can work how and where they work best with time-saving onboard templates, intuitive PC labeling software and a mobile app.





# BETTER STARTS WITH BRADY


The performance you need. From the name you trust.

## KEY FEATURES



### Precise shape cutting

- ▶ Straighter lines
- ▶ Rounder circles
- ▶ Tighter connection points
- ▶ Pipe markers can be stacked and multiple shapes packed closer together

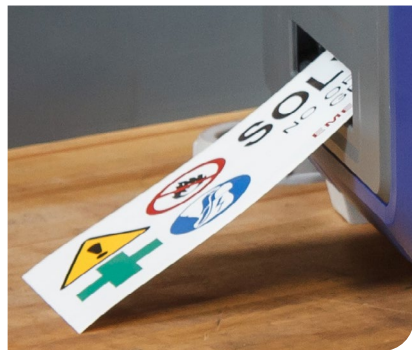


### Durable multicolor made easy

- ▶ Easy-change, drop-lock print ribbons and labels
- ▶ No-change multicolor print ribbons
- ▶ Compliance-driving safety colors
- ▶ Impactful labels durable up to 10 years




### Automatic label setup

- ▶ No calibrating, no threading
- ▶ Printer auto-IDs material, sets accurate burn settings and speed
- ▶ 20-second material changeovers
- ▶ Print ribbon lasts up to 60% longer thanks to auto adjustments

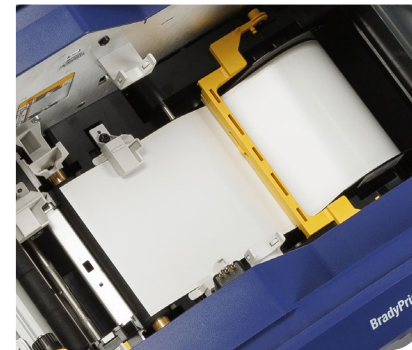

### Blazing-fast print speed — up to 5 in. per second!

- ▶ Any size job delivered fast
- ▶ Streamlines print queues and minimizes bottlenecks

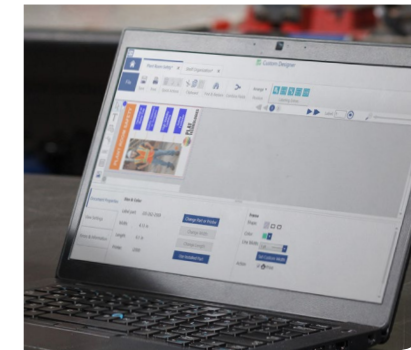

### Works how you work best

- ▶ Enables any user to create almost any label or sign
- ▶ Multiple ways to create and connect: onboard, PC or app
- ▶ PC labeling software for next-level label creation
- ▶ Wi-Fi and Bluetooth ready
- ▶ Mobile app for assessing needs and creating labels on the move



### Walk-up-and-print convenience

- ▶ Time-saving onboard templates
- ▶ No design expertise needed
- ▶ Right labels, right when you need them

**S3700** | MULTICOLOR + CUT SIGN AND LABEL PRINTER



# POWERFUL, PRECISE PRODUCTION

With the ability to print in multicolor on a wide variety of material types and sizes, plus cut shapes, letters and more, this printing system will leave you wanting for nothing — except maybe more labeling jobs.



## Integrated label library

Onboard label templates and 600 pre-programmed barcodes and symbols

## Multiple ways to connect

Wi-Fi and Bluetooth enabled, two USB ports and ethernet ready

## Easy-access latch

Allows immediate access to all serviceable internal parts

## User-friendly tilt display

Full-color, 6-in. touchscreen and fast processor

## Auto cutter

Cuts off material after a job, after a label or not at all

## Onboard input

Full-size QWERTY keyboard folds out of the printer body


## Installed parts display

Provides a quick snapshot of what's in, and what's not



# SERIOUS PRODUCTIVITY fueled by Brady technology

Manage the demands of your day with a printer that takes on the tough work. Take a look under the hood at the automating, time-saving, headache-eliminating features all designed to make every print job flawless, faster.

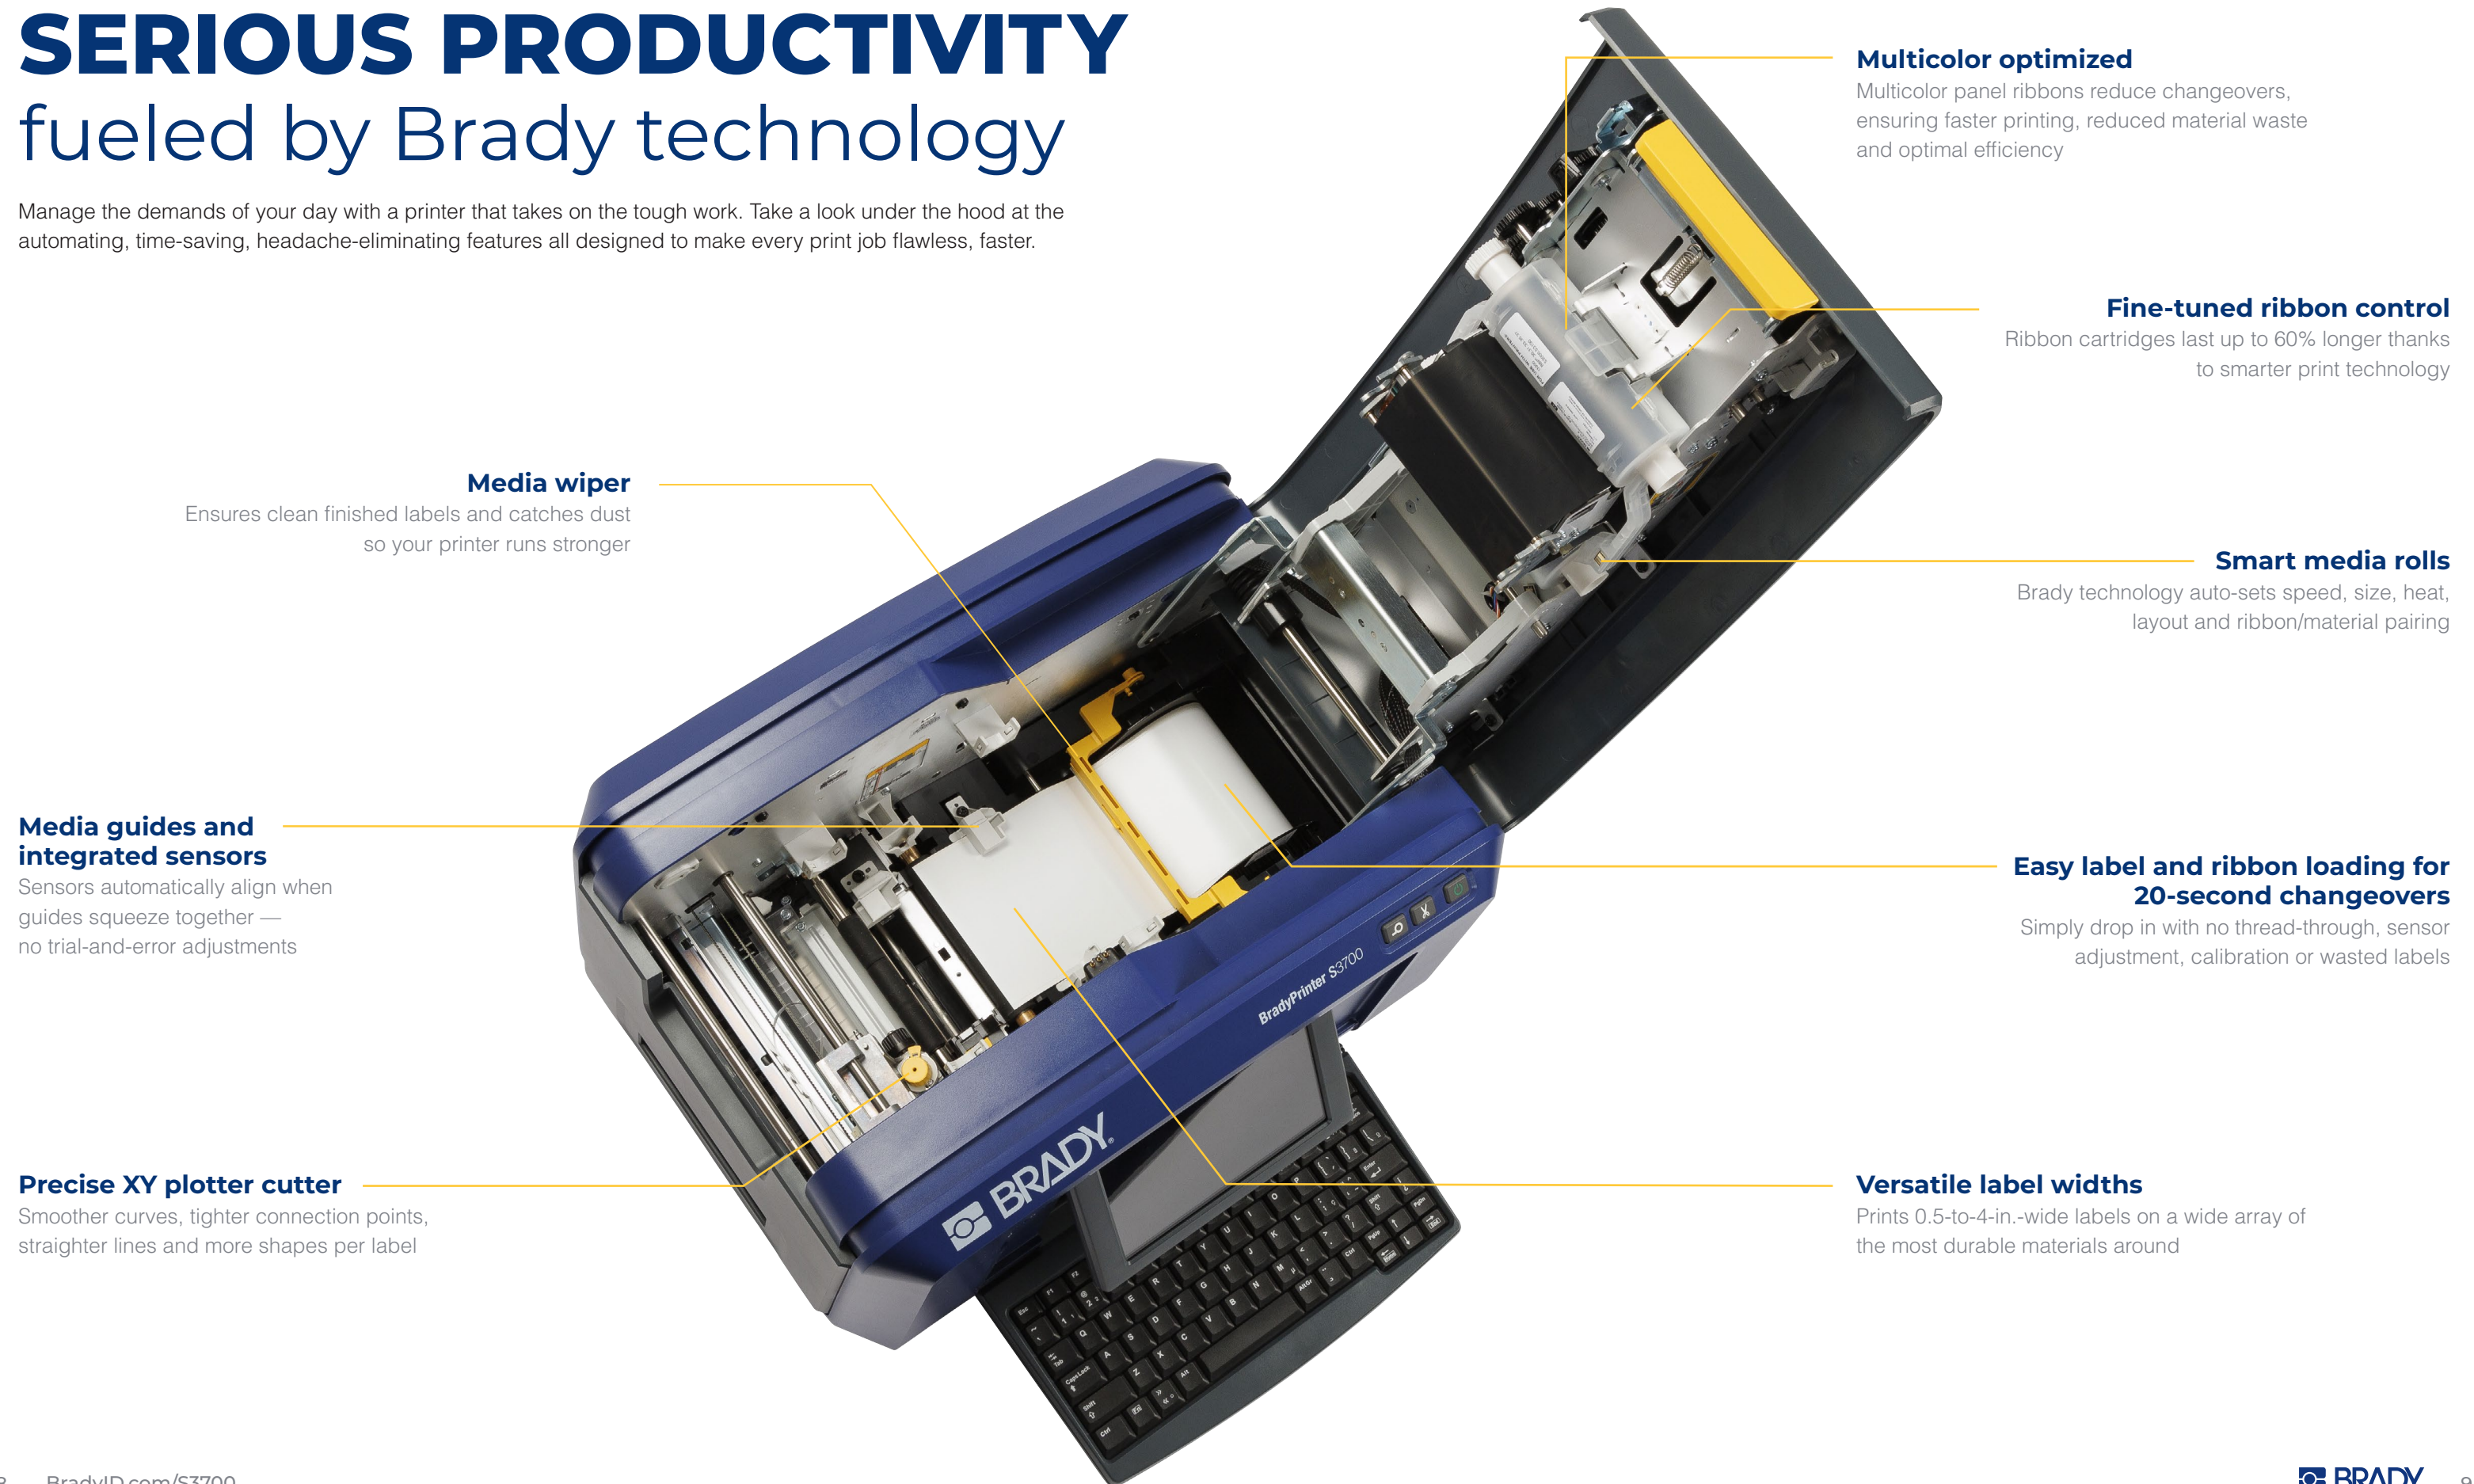

## Media wiper

Ensures clean finished labels and catches dust so your printer runs stronger

## Media guides and integrated sensors

Sensors automatically align when guides squeeze together — no trial-and-error adjustments

## Precise XY plotter cutter

Smoother curves, tighter connection points, straighter lines and more shapes per label

## Multicolor optimized

Multicolor panel ribbons reduce changeovers, ensuring faster printing, reduced material waste and optimal efficiency

## Fine-tuned ribbon control

Ribbon cartridges last up to 60% longer thanks to smarter print technology

## Smart media rolls

Brady technology auto-sets speed, size, heat, layout and ribbon/material pairing

## Easy label and ribbon loading for 20-second changeovers

Simply drop in with no thread-through, sensor adjustment, calibration or wasted labels

## Versatile label widths

Prints 0.5-to-4-in.-wide labels on a wide array of the most durable materials around



# THE RIGHT TECHNOLOGY

## from the right partner

The S3700 printer, now with cutting-edge Brady print technology

Get advanced print performance with time-saving, cost-reducing technology built into every S3700. Designed as a system (printer, ribbon, materials), each part “talks” to the other and enables many automatic functions. Auto setup and part recognition save you time, and auto adjustments help **ribbon cartridges last up to 60% longer**.



### Faster setup

Set up your S3700 in seconds. Just drop in your ribbon and label roll. The printer recognizes built-in smart cell chips, allowing for fast setup.



### Easier printing

Loaded with time-saving features, label templates and an intuitive interface, the S3700 offers easy operation for any application.



### Less waste

Thanks to auto calibration and setup, the S3700 prints on the very first label. That eliminates frustrating trial and error, and expensive waste.



# PROFESSIONAL GRADE Premium Experience

Faster speeds. More options. Smoother operations.



## S3700 Multicolor & Cut Sign and Label Printer

The S3700 offers a number of time- and cost-saving benefits:

- ▶ Quickly change over materials in under 20 seconds
- ▶ Print on the first label – no calibration required
- ▶ Built-in XY cutter slices shapes and letters flawlessly
- ▶ Multicolor optimized for more impactful labels, signs and tags
- ▶ Prints on a wide variety of labels up to 4-in. wide




### Catalog #

**S3700-WB** BradyPrinter S3700 Multicolor & Cut Sign and Label Printer

*The above part number descriptions do not reflect complete product data — refer to the specification sheet for complete details. S3700 printers accept the B30 series version V2 media.*

Printer ships with Brady Workstation label creation software, power and USB cords, cleaning kit, QuickStart Guide and USB user manual, Windows driver and how-to videos.

The S3700 easily integrates with your existing systems and platforms — but only Brady Workstation Label Creation and Management Software truly maximizes the full potential of your printing experience.



### Simple. Durable. Reliable.

Single color printing for durability, clarity and consistency


#### S3100 Sign and Label Printer

No need for shapes or multicolor? Try the S3100, with a user-friendly touch-screen interface for standalone use. Consistently get the job done right every time with this reliable printer. Simply walk up. Print. Done.



# PRINT RIBBONS

More options. Bigger impact. Extremely durable.

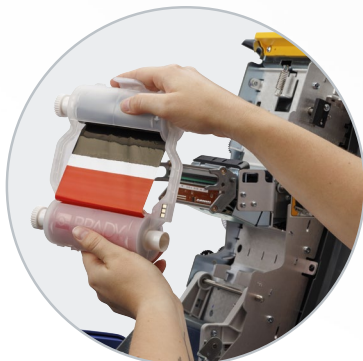


## Multicolor panel ribbons

Choose from 2- and 4-color ribbons to simplify and reduce changeovers. Print more in multicolor for more impactful identification, less hassle and minimal waste.

## Rapid ribbon changes

Get 5-second ribbon supply changes with drop-and-click technology. No calibrating, no threading and no waste. Each tough, smear-proof ribbon withstands years of industrial use.

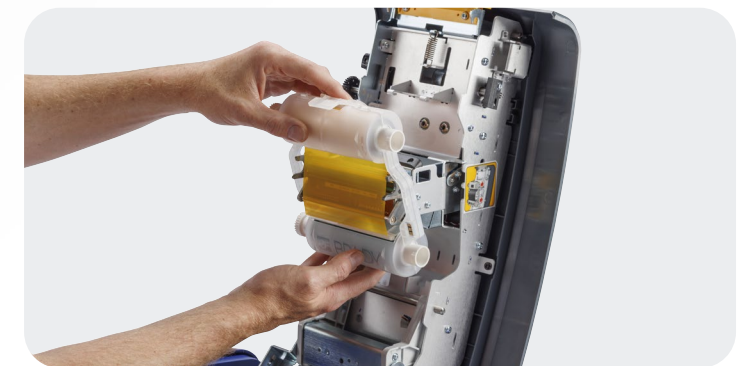

## 5-second ribbon installation

- ▶ Tough, smear-proof ribbons produce long-lasting printed text and can withstand years in industrial areas and outdoor conditions
- ▶ Self-contained cartridges drop straight into printer with a "click"
- ▶ No calibrating, no threading, no wasted feeding, no hassles and the ink will always be facing the right direction
- ▶ Printer notifies user if installed ribbon is not recommended for installed labels



## Single-Color Print Ribbons

- Solid color ribbons for printing a single color onto a label
- Can be swapped out for printing multicolor labels on the printer if a multicolor panel ribbon is not on hand



Catalog #	Color	Size Inch (mm)	Length Feet (m)	Catalog #	Color	Size Inch (mm)	Length Feet (m)
B30-R10000	Black	4.330 (109.9)	200 (60.9)	B30-R10000-RD	Red	4.330 (109.9)	200 (60.9)
B30-R6000	Black	4.330 (109.9)	200 (60.9)	B30-R10000-GN	Green	4.330 (109.9)	200 (60.9)
B30-R6200	Black	4.330 (109.9)	200 (60.9)	B30-R10000-BL	Blue	4.330 (109.9)	200 (60.9)
B30-R6400	Black	4.330 (109.9)	200 (60.9)	B30-R10000-YL	Yellow*	4.330 (109.9)	200 (60.9)
B30-R4300	Black	4.330 (109.9)	200 (60.9)	B30-R10000-OR	Orange	4.330 (109.9)	200 (60.9)
B30-R4900	Black	4.330 (109.9)	200 (60.9)				
B30-R4400-WT	White	4.330 (109.9)	200 (60.9)				
B30-R10000-WT	White	4.330 (109.9)	200 (60.9)				

\* B30-R10000-YL for printing yellow onto white.

## Multicolor Panel Print Ribbons

- Ribbons have panels of 2 or 4 different colors for printing multiple colors onto a label
- Print multiple colors without having to swap in multiple ribbons



### Two-Color Print Ribbons

Catalog #	Color	Size Inch (mm) x Inch (mm)	Length Feet (m)
<b>8-in. panel length — Typical yield: 100 panel sets per roll</b>			
B30-R10000-KR-8	Black and Red	4.330 (101.9) x 8.000 (203.2) Panels	200 (60.9)
B30-R10000-KB-8	Black and Blue	4.330 (101.9) x 8.000 (203.2) Panels	200 (60.9)
B30-R10000-KO-8	Black and Orange	4.330 (101.9) x 8.000 (203.2) Panels	200 (60.9)
B30-R10000-KG-8	Black and Green	4.330 (101.9) x 8.000 (203.2) Panels	200 (60.9)
<b>16-in. panel length — Typical yield: 60 panel sets per roll</b>			
B30-R10000-KR-16	Black and Red	4.330 (101.9) x 16.000 (406.4) Panels	200 (60.9)
B30-R10000-KB-16	Black and Blue	4.330 (101.9) x 16.000 (406.4) Panels	200 (60.9)
B30-R10000-KO-16	Black and Orange	4.330 (101.9) x 16.000 (406.4) Panels	200 (60.9)
B30-R10000-RB-16	Red and Blue	4.330 (101.9) x 16.000 (406.4) Panels	200 (60.9)

### Four-Color Print Ribbons

Catalog #	Color	Size Inch (mm) x Inch (mm)	Length Feet (m)
<b>8-in. panel length — Typical yield: 50 panel sets per roll</b>			
B30-R10000-KRYG-8	Black, Red, Yellow and Green	4.330 (101.9) x 8.000 (203.2) Panels	200 (60.9)
B30-R10000-KRYB-8	Black, Red, Yellow and Blue	4.330 (101.9) x 8.000 (203.2) Panels	200 (60.9)
B30-R10000-KRBO-8	Black, Red, Blue and Orange	4.330 (101.9) x 8.000 (203.2) Panels	200 (60.9)
<b>16-in. panel length — Typical yield: 30 panel sets per roll</b>			
B30-R10000-KRYB-16	Black, Red, Yellow and Blue	4.330 (101.9) x 16.000 (406.4) Panels	200 (60.9)

## Print Ribbon & Label Material Compatibility

To ensure the best legend permanence, all ribbons have been developed to meet the requirements of the materials to be printed on. Use the guide below to determine which ribbon series is recommended with your print materials.

●	Recommended ribbon for use with respective material.
▲	Acceptable ribbon for use with respective material.
UL	Materials are UL recognized with its respective ribbon.
CSA	Materials are CSA approved with its respective ribbon.

B-# material		B30-R4300	B30-R4900	B30-R6000	B30-R6200	B30-R6400	B30-R10000	B30-R4400-WT	B30-R10000-WT	B30-R10000-YL*	B30-R10000**
B-423	Polyester	—	—	● UL / CSA	▲	—	●	—	—	—	—
B-424	Paper	●	—	—	—	—	—	—	—	—	—
B-428	Metallized Polyester	● UL / CSA	—	—	—	—	—	—	—	—	—
B-432	Clear Polyester	—	▲ UL	● UL / CSA	—	—	—	▲	—	—	—
B-434A	Metallized Polyester	—	—	● UL / CSA	—	—	—	—	—	—	—
B-437	Polyvinylfluoride	●	—	—	—	—	—	—	—	—	—
B-437 YEL	Polyvinylfluoride	●	—	—	—	—	—	—	—	—	—
B-438	Metallized Polyester	● UL / CSA	—	—	—	—	●	—	—	—	—
B-443	Polyester	—	—	—	—	● UL / CSA	—	—	—	—	—
B-480	Polyester Rubber-Based Adhesive	—	—	●	—	—	—	●	—	—	—
B-483	Polyester	—	—	● UL / CSA	—	—	●	—	—	—	●
B-483A	ToughStripe® Polyester	—	—	●	—	—	●	●	—	—	●
B-484A	Polyester	—	—	● UL	—	—	—	—	—	—	—
B-486B	Metallized Polyester	● UL / CSA	—	—	—	—	—	—	—	—	—
B-488	Matte White Polyester	●	—	—	—	—	—	—	—	—	—
B-489A	Polyester	● UL / CSA	—	—	—	—	—	—	—	—	—
B-498	Repos Cloth	▲ UL	—	—	● UL	—	—	—	—	—	—
B-509	Printable Magnetic	—	—	●	—	—	●	—	—	—	●
B-526	Photoluminescent Polyester	—	—	●	—	—	●	—	—	—	●
B-549	Polyester	—	—	●	—	—	●	—	—	—	●
B-551	Non-Adhesive Tag	—	—	—	—	—	●	—	—	—	●
B-565	Metallized Polyester	—	—	—	—	—	●	—	—	—	—
B-569	Polyester	—	—	●	—	—	●	—	●	—	●
B-581	Repos Vinyl	—	—	●	—	—	●	—	—	—	●
B-584	Reflective	—	—	●	—	—	●	—	—	—	●
B-593	Polyester	—	—	●	—	—	—	●	—	—	—
B-595	Outdoor Vinyl	—	—	●	—	—	●	—	●	—	●
B-724	Polyimide	●	—	—	—	—	—	—	—	—	—
B-727	Polyimide	—	—	● UL	—	—	—	—	—	—	—
B-787	Glossy White Polyvinyl Fluoride	—	—	●	—	—	—	—	—	—	—
B-851	Non-Adhesive Tag	—	—	—	—	—	●	—	—	—	●
B-854	ToughWash® Metal Detectable	—	—	●	—	—	●	—	—	—	●
B-855	ToughWash	—	—	●	—	—	—	—	—	—	—
B-7569	Vinyl Film	—	—	●	—	—	●	—	—	—	—

\* B30-R10000-YL for printing yellow onto white.

\*\* Colored ribbons optimized for use on white material. Test use on other material colors for suitability to your application.




# Making the IMPOSSIBLE POSSIBLE

An engine compartment label that won't burn. A food and beverage label that resists harsh washdowns and chemical sanitizers. A sign that lives in the elements for a decade and is still legible.

Every day, our scientists are tasked with making impossible situations possible, which is why we invest so heavily in research and development. Brady's patent portfolio is a direct reflection of our dedication to use science to solve for everything — from lubricants to solvents, freezing cold to blistering heat, and anything else your workplace can come up with.

You may have 1,000 problems, but finding the right Brady material isn't one of them.

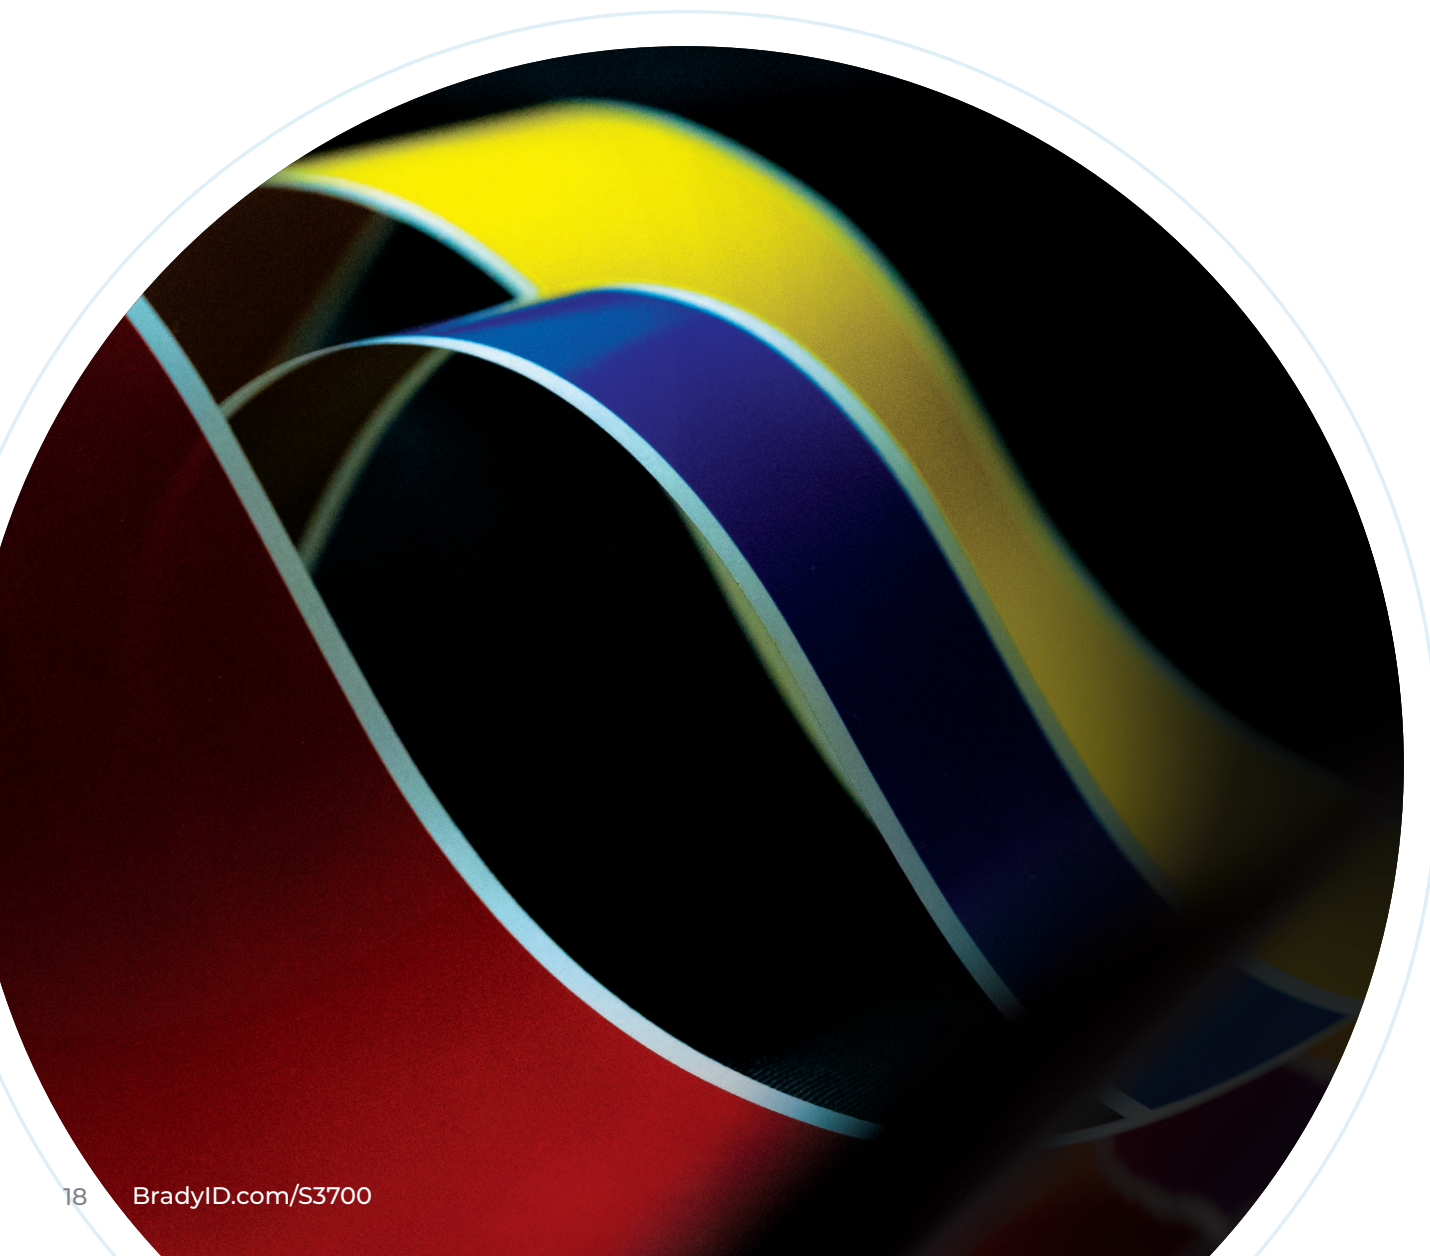

## Materials for every application

Successful projects start (and end) with Brady materials. Optimum performance and durability are assured with each.

			Color	Permanent	Removable	Matte	Gloss	Service Temperature	Page #
B-423	Multi-Purpose Polyester	Polyester with a high-gloss finish and a permanent acrylic adhesive. Excellent image quality and widely used for barcoding, asset tracking, product labels and post-process PCB electronic component labeling. Adheres best to flat surfaces. UL-rated for surfaces commonly used in solar panel manufacturing.	○	•			•	-94° to 248°F	35, 36
B-424	Paper	Bright white paper label with a permanent latex adhesive. Excellent barcode read rates. Ideal for labeling applications requiring a low-cost, general-purpose labeling material.	○	•		•		-40° to 122°F	35, 38
B-428	Metallized Matte Polyester	Matte metallized polyester with a permanent adhesive. Light gray, matte appearance. Adheres best to flat surfaces. Ideal for rating plates on products and panels, and general-purpose product labels.	●	•		•		-40° to 293°F	35, 37
B-432	High Adhesion Multi-Purpose Clear Polyester	Clear polyester with a high-gloss finish and a stronger, 2-mil permanent acrylic adhesive. It has excellent imaging quality and is designed for flat surfaces that are textured or require increased adhesion.	⊙	•			•	-40° to 212°F	35
B-434	Metallized High Adhesion Polyester	Glossy metallized polyester with a stronger, 2-mil permanent adhesive. It has a high-gloss, silver appearance with excellent image quality. Adhesive is designed for flat surfaces that are textured or require increased adhesion. Ideal for rating plates, general-purpose product labels and asset tracking labels.	●	•			•	-40° to 194°F	35, 37
B-437	Self-Extinguishing Tedlar®	Heavy-duty Tedlar® label material with self-extinguishing features for wire and cable wrapping. It has excellent resistance to water, oil, chemicals and abrasion.	○●	•		•		-94° to 275°F	35
B-438	Checkerboard Pattern Tamper Evident Matte Metallized Polyester	Tamper-indicating, metallized polyester label that leaves an aggressive checkerboard adhesive pattern on the surface if label is removed. It has a matte, silver appearance with excellent imaging quality for text, barcodes and symbols. It is designed for rating and serial plates, asset tracking labels and product ID such as warranty labels when anti-tampering and tamper-indicating features are desired.	●	•		•		-40° to 104°F	36
B-443	Ultra Aggressive Adhesive High Temp and Chemical Resistant Polyester Labels	Very durable matte polyester with excellent high-temp resistance and superior resistance to fluids and chemicals that are not high in pH value. Short term temp resistance to 410° F. Features a hybrid acrylic-rubber-based permanent adhesive and is self-extinguishing.	○	•		•		-94° to 248° F	38
B-480	Ultra High Adhesion Matte Faux Metallized Polyester Labels	Thermal transfer polyester material with a metallic-looking finish and an aggressive adhesive.	●	•				-94° to 248° F	35
B-483A	Ultra High Adhesion Multi-Purpose Polyester	Polyester with high-gloss finish and ultra-aggressive, permanent acrylic adhesive. Designed for very high adhesion to flat but highly textured or powder-coated surfaces and low-surface-energy surfaces. Gloss version of B-489.	○	•			•	-40° to 248°F	30, 35
B-484	Flexible High Adhesion Multi-Purpose Polyester	Polyester with a glossy finish and a stronger, permanent acrylic adhesive. Similar to B-483, but with a thinner construction to facilitate high adhesion to flat, curved or angular surfaces, and surfaces that are textured, powder coated or low-surface energy.	○	•			•	-40° to 248°F	35
B-486	Ultra High Adhesion Metallized Matte Polyester	Matte metallized polyester with an ultra-aggressive, permanent adhesive. It has a light gray, matte appearance. Designed for very high adhesion to flat but highly textured or powder-coated surfaces and low-surface-energy surfaces. Ideal for panel rating plates, product labels and asset-tracking labels.	●	•		•		-40° to 248°F	35
B-488	Solvent Resistant Polyester Labels	High Performance Polyester withstands numerous solvents and variable temperatures when applied to various surfaces including Stainless Steel and Polypropylene.	○	•		•		-40° to -320°F	35
B-489	Ultra High Adhesion Multi-Purpose Matte Polyester	Matte polyester with an ultra-aggressive, permanent adhesive. It is designed for very high adhesion to flat but highly textured or powder-coated surfaces and low-surface-energy surfaces. Matte version of B-483.	○	•		•		-94° to 248°F	35
B-498	Repositionable Multi-Purpose Vinyl Cloth	Vinyl cloth with an aggressive and repositionable adhesive for wire and cable wraps and general-purpose labeling applications. Label adheres with excellent holding power, yet can be easily and cleanly removed and repositioned.	○		•		•	-40° to 175°F	35
B-509	Magnetic Polyester (repositionable)	A thick, non-adhesive magnetic material with a printable vinyl topcoat. The easiest and quickest material for repositioning and reusing labels.	○●		•	•		-0° to 158°F	29







## Low-Halide Multi-Purpose Polyester (B-569)

- Low-halide content for labeling stainless steel pipes and surfaces.
- Adheres best to very smooth surfaces and ideal for mounting to rigid panels




Figure 3



For XY-Cutter	Diagram	Catalog #	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
-	Fig. 3	B30C-500-569-WT	White	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-569-WT	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-569-WT	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-3000-569-WT	White	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R10000
☒	Fig. 3	B30C-4000-569-WT	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-500-569-YL	Yellow	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-569-YL	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-569-YL	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
☒	Fig. 3	B30C-4000-569-YL	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-500-569-RD	Red	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-1125-569-RD	Red	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-2250-569-RD	Red	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
☒	Fig. 3	B30C-4000-569-RD	Red	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-500-569-BL	Blue	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-1125-569-BL	Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-2250-569-BL	Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
☒	Fig. 3	B30C-4000-569-BL	Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-500-569-LB	Light Blue	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-569-LB	Light Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-569-LB	Light Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
☒	Fig. 3	B30C-4000-569-LB	Light Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-500-569-SB	Sky Blue	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-569-SB	Sky Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-569-SB	Sky Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
☒	Fig. 3	B30C-4000-569-SB	Sky Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-500-569-GN	Green	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-1125-569-GN	Green	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-2250-569-GN	Green	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
☒	Fig. 3	B30C-4000-569-GN	Green	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-500-569-OR	Orange	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-569-OR	Orange	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-569-OR	Orange	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
☒	Fig. 3	B30C-4000-569-OR	Orange	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-500-569-BK	Black	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-1125-569-BK	Black	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-2250-569-BK	Black	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
☒	Fig. 3	B30C-4000-569-BK	Black	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-500-569-BR	Brown	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-1125-569-BR	Brown	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-2250-569-BR	Brown	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
☒	Fig. 3	B30C-4000-569-BR	Brown	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-500-569-OC	Ochre	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-569-OC	Ochre	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-569-OC	Ochre	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
☒	Fig. 3	B30C-4000-569-OC	Ochre	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-500-569-TN	Tan	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-569-TN	Tan	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-569-TN	Tan	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
☒	Fig. 3	B30C-4000-569-TN	Tan	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-500-569-GY	Gray	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-569-GY	Gray	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-569-GY	Gray	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
☒	Fig. 3	B30C-4000-569-GY	Gray	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-500-569-PL	Purple	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-1125-569-PL	Purple	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-2250-569-PL	Purple	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
☒	Fig. 3	B30C-4000-569-PL	Purple	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-500-569-PK	Pink	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-569-PK	Pink	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-569-PK	Pink	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
☒	Fig. 3	B30C-4000-569-PK	Pink	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-500-569-CL	Clear	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-569-CL	Clear	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-569-CL	Clear	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
☒	Fig. 3	B30C-4000-569-CL	Clear	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000

## Pre-Printed Pre-Cut Blank Sign Headers (B-595)

- Allows printer to create multicolor signs fast in a single print pass
- Headers meet NFPA 70E, OSHA 1910.145 and ASME / ANSI Z535 standards
- Indoor / outdoor grade material conforms to rough, highly textured and difficult-to-adhere-to surfaces




Figure 70a



Diagram	Catalog #	B#	Material	Header	Label Height A Inch (mm)	Label Width B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Fig. 70a	B30-241-595-OSHADA	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
Fig. 70a	B30-25-595-OSHADA	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
Fig. 70a	B30-241-595-OSHACA	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
Fig. 70a	B30-25-595-OSHACA	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
Fig. 70a	B30-241-595-ANSICA	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
Fig. 70a	B30-25-595-ANSICA	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
Fig. 70a	B30-241-595-ANSIDA	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
Fig. 70a	B30-25-595-ANSIDA	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
Fig. 70a	B30-241-595-ANSIWA	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
Fig. 70a	B30-25-595-ANSIWA	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
Fig. 70a	B30-241-595-ANSINO	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
Fig. 70a	B30-25-595-ANSINO	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
Fig. 70a	B30-25-595-PREC	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
Fig. 70a	B30-25-595-PEL	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
Fig. 70a	B30-242-595-BLNKWT	B-595	Vinyl		1.125 (28.6)	2.750 (69.9)	1	300	B30-R10000
Fig. 70a	B30-241-595-BLNKWT	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
Fig. 70a	B30-219-595-BLNKWT	B-595	Vinyl		2.250 (57.5)	3.750 (95.3)	1	250	B30-R10000
Fig. 70a	B30-25-595-BLNKWT	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
Fig. 70a	B30-241-595-BLNKYL	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
Fig. 70a	B30-25-595-BLNKYL	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000



## Pre-Printed GHS / CLP Chemical Labels (B-569, B-7569)

- Blank labels with pre-printed red diamonds allow the printer to produce 2-color GHS / CLP labels in one print pass
- Three sizes of labels, each with six diamond layouts that match templates in the printer app (if applicable) or in the Brady Workstation GHS App
- Indoor / outdoor vinyl material and durable inks withstand exposure to moisture, chemicals and handling



Catalog #	B#	Material	Legend		Label Height Inch (mm)	Label Width Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
B30-260-7569-CLP1	B-7569	Vinyl		L1 Diamond + Text	2.170 (55.0)	3.350 (85.1)	1	340	B30-R10000
B30-261-7569-CLP1	B-7569	Vinyl		L1 Diamond + Text	2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
B30-262-7569-CLP1	B-7569	Vinyl		L1 Diamond + Text	4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000
B30-260-7569-CLP2	B-7569	Vinyl		L2 Diamond + Text	2.170 (55.0)	3.350 (85.1)	1	340	B30-R10000
B30-261-7569-CLP2	B-7569	Vinyl		L2 Diamond + Text	2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
B30-262-7569-CLP2	B-7569	Vinyl		L2 Diamond + Text	4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000
B30-260-7569-CLP3A	B-7569	Vinyl		L3A Diamond + Text	2.170 (55.0)	3.350 (85.1)	1	340	B30-R10000
B30-261-7569-CLP3A	B-7569	Vinyl		L3A Diamond + Text	2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
B30-262-7569-CLP3A	B-7569	Vinyl		L3A Diamond + Text	4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000
B30-260-7569-CLP3B	B-7569	Vinyl		L3B Diamond + Text	2.170 (55.0)	3.350 (85.1)	1	340	B30-R10000
B30-261-7569-CLP3B	B-7569	Vinyl		L3B Diamond + Text	2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
B30-262-7569-CLP3B	B-7569	Vinyl		L3B Diamond + Text	4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000
B30-260-7569-CLP4A	B-7569	Vinyl		L4A Diamond + Text	2.170 (55.0)	3.350 (85.1)	1	340	B30-R10000
B30-261-7569-CLP4A	B-7569	Vinyl		L4A Diamond + Text	2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
B30-262-7569-CLP4A	B-7569	Vinyl		L4A Diamond + Text	4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000
B30-260-569-CLP4B	B-569	Polyester		L4B Diamond + Text	2.170 (55.0)	3.350 (85.1)	1	340	B30-R10000
B30-260-7569-CLP4B	B-7569	Vinyl		L4B Diamond + Text	2.170 (55.0)	3.350 (85.1)	1	340	B30-R10000
B30-261-569-CLP4B	B-569	Polyester		L4B Diamond + Text	2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
B30-261-7569-CLP4B	B-7569	Vinyl		L4B Diamond + Text	2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
B30-262-569-CLP4B	B-569	Polyester		L4B Diamond + Text	4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000
B30-262-7569-CLP4B	B-7569	Vinyl		L4B Diamond + Text	4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000
B30-18-7569-CLP4C	B-7569	Vinyl		L4C Diamond + Text	1.000 (25.4)	3.000 (76.2)	1	1000	B30-R10000

### ▶ Easily create your GHS labels with Brady Workstation GHS App

- Use built-in pre-formatted label layouts with approved GHS symbols
- Search the built-in chemical database by CAS number to auto-populate your label, then edit to meet your specific SDS
- Print any of the six template sizes
- No driver required when using the BradyPrinter S3700



## Pre-Printed Right-To-Know Chemical Labels (B-595)

- Produce 5-color chemical labels in a single print pass
- Indoor / outdoor grade material withstands exposure to moisture, chemicals and handling

Service temp: -40 to 180° F  
Application temp: 0 to 180° F  
Average outdoor durability: 8-10 years  
Agency approvals: **RoHS**



Catalog #	Legend	Label Height Inch (mm)	Label Width Inch (mm)	Labels Per Roll	Rec. Ribbon
B30-244-595-NFPA	Diamond + Text	2.250 (57.5)	2.250 (57.5)	365	B30-R10000
B30-245-595-NFPA	Diamond + Text	2.250 (57.5)	4.000 (101.6)	240	B30-R10000
B30-263-595-NFPA	Diamond + Text	4.000 (101.6)	6.250 (158.8)	170	B30-R10000
B30-244-595-DIAM	Diamond Only	2.250 (57.5)	2.250 (57.5)	365	B30-R10000
B30-161-595-DIAM	Diamond Only	4.000 (101.6)	4.000 (101.6)	240	B30-R10000
B30-246-595-NFR	Diamond NFR	1.125 (28.6)	3.000 (76.2)	300	B30-R10000
B30-244-595-CB	Color Bar + Text	2.250 (57.5)	2.250 (57.5)	365	B30-R10000
B30-245-595-CB	Color Bar + Text	2.250 (57.5)	4.000 (101.6)	240	B30-R10000
B30-263-595-CB	Color Bar + Text	4.000 (101.6)	6.250 (158.8)	170	B30-R10000
B30-244-595-HMIG	Color Bar Only	2.250 (57.5)	2.250 (57.5)	365	B30-R10000
B30-246-595-HMIG	Color Bar HMIG	1.125 (28.6)	3.000 (76.2)	300	B30-R10000



## Heavy Duty Polyester Tags (B-551, B-851)

- Non-adhesive polyester tag provides superior durability and outdoor performance over paper tags
- All tags are user-printable on front side only – pre-printed reverse side text options available
- Tags comply with OSHA 1910.145(f) when printed with required signal word and major message, and exceed 50 lb. pull test for lockout application
- Blank tags are ideal for general industrial and color coding applications
- Tags are pre-cut with large diameter mounting hole and are micro-perforated between tags to separate cleanly
- Snap-in plastic grommets available to add extra strength around mounting hole (catalog #20596, 100 per bag)

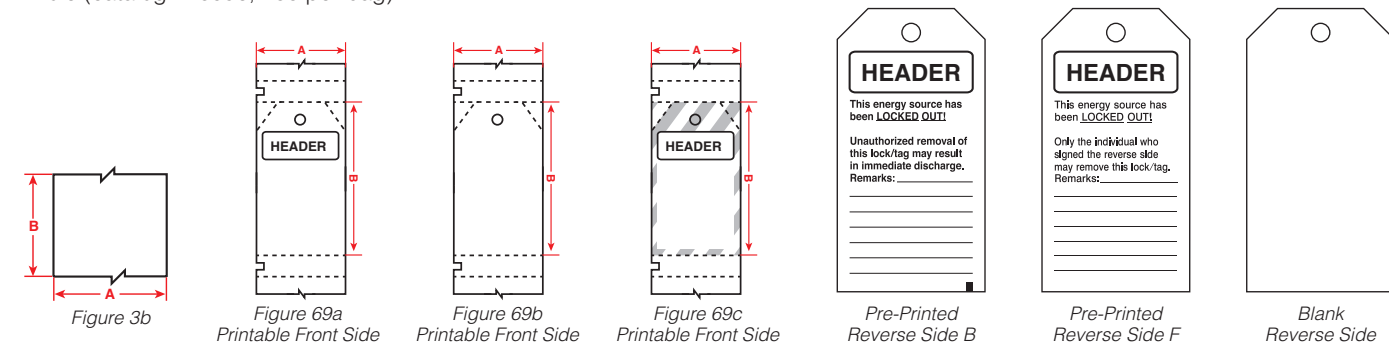


Diagram	Catalog #	Color	B#	Printable Front Side	Non-Printable Reverse Side Text	Tag Width A	Tag Length B	Tags Per Roll	Rec. Ribbon
69c	B30-255-851OSHADSB	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69a	B30-255-851-ANSIDB	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69a	B30-255-851-OSHADB	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69b	B30-255-851-WHT-B	White	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69c	B30-255-851OSHADSF	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69a	B30-255-851-ANSIDF	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69a	B30-255-851-OSHADF	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69b	B30-255-851-WHT-F	White	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69c	B30-255-851-OST-BK	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69a	B30-255-851-ANSIDA	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69a	B30-255-851-OSHADA	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69a	B30-255-851-ANSICA	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69b	B30-255-851-WT	White	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69b	B30-255-851-RD	Red	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69b	B30-255-851-YL	Yellow	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69b	B30-255-851-GN	Green	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69b	B30-255-851-BL	Blue	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69b	B30-255-851-OR	Orange	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
3b	B30C-2500-551-WT	White	B-551			2.500 (63.5)	50 ft. (15.2m)	1 roll (cont.)	B30-R10000
3b	B30C-3250-551-WT	White	B-551			3.250 (82.6)	50 ft. (15.2m)	1 roll (cont.)	B30-R10000
3b	B30C-4250-551-WT	White	B-551			4.250 (107.9)	50 ft. (15.2m)	1 roll (cont.)	B30-R10000

## General Identification Die Cut Labels for Bins, Shelves, Tools and Production Areas (B-595)

- These labels are all highly conforming to irregular, angled or rough surfaces frequently found in industrial production line areas
- Die-cut labels are an ideal choice when pre-cut labels are preferred or consistent label sizing is required
- B-595 is a convenient cut-to-length continuous material that reduces the need to stock multiple parts when inconsistent label lengths are expected




Diagram	Catalog #	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Rec. Ribbon
Fig. 3a	B30C-500-595-WT	White	0.500 (12.7)	100 ft. (30.5 m)	0.700 (17.8)	1 roll (cont.)	B30-R10000
Fig. 3a	B30C-1125-595-WT	White	1.125 (28.6)	100 ft. (30.5 m)	1.375 (34.9)	1 roll (cont.)	B30-R10000
Fig. 3a	B30C-500-595-YL	Yellow	0.500 (12.7)	100 ft. (30.5 m)	0.700 (17.8)	1 roll (cont.)	B30-R10000
Fig. 3a	B30C-1125-595-YL	Yellow	1.125 (28.6)	100 ft. (30.5 m)	1.375 (34.9)	1 roll (cont.)	B30-R10000



## General Identification for Laboratory Storage, Equipment and Safety Labels

### (B-595, B-7569)

- Super strong adhesives and colors ideal for marking laboratory equipment, containers, hoses and lab storage cabinets, shelves and drawers
- GHS labels available for marking chemicals in the lab and shipment boxes when collaborating with other labs
- Pre-printed sign header labels make your safety and housekeeping reminders stand out and stay put!





Diagram	Catalog #	Color /Legend	Label Width A Inch (mm)	Label Height B Inch (mm)	Roll Length B Feet (m)	Labels Per Row	Labels Per Roll	Rec. Ribbon
<b>Indoor/Outdoor Vinyl (B-595):</b>								
Fig. 3a	B30C-500-595-WT	White	0.500 (12.7)	-	100 (30.5)	-	1 roll (cont.)	B30-R10000
Fig. 3a	B30C-1125-595-WT	White	1.125 (28.6)	-	100 (30.5)	-	1 roll (cont.)	B30-R10000
Fig. 3a	B30C-500-595-YL	Yellow	0.500 (12.7)	-	100 (30.5)	-	1 roll (cont.)	B30-R10000
Fig. 3a	B30C-1125-595-YL	Yellow	1.125 (28.6)	-	100 (30.5)	-	1 roll (cont.)	B30-R10000
Fig. 3a	B30C-500-595-RD	Red	0.500 (12.7)	-	100 (30.5)	-	1 roll (cont.)	B30-R10000-WT
Fig. 3a	B30C-1125-595-RD	Red	1.125 (28.6)	-	100 (30.5)	-	1 roll (cont.)	B30-R10000-WT
Fig. 3a	B30C-500-595-BL	Blue	0.500 (12.7)	-	100 (30.5)	-	1 roll (cont.)	B30-R10000-WT
Fig. 3a	B30C-1125-595-BL	Blue	1.125 (28.6)	-	100 (30.5)	-	1 roll (cont.)	B30-R10000-WT
Fig. 3a	B30C-500-595-GN	Green	0.500 (12.7)	-	100 (30.5)	-	1 roll (cont.)	B30-R10000-WT
Fig. 3a	B30C-1125-595-GN	Green	1.125 (28.6)	-	100 (30.5)	-	1 roll (cont.)	B30-R10000-WT
<b>Pre-Printed Pre-Cut Blank Sign Headers (B-595):</b>								
Fig. 70	B30-241-595-ANSIDA		2.250 (57.5)	3.000 (76.2)	-	1	300	B30-R10000
Fig. 70	B30-25-595-ANSIDA		4.000 (101.6)	6.000 (152.4)	-	1	175	B30-R10000
Fig. 70	B30-241-595-ANSINO		2.250 (57.5)	3.000 (76.2)	-	1	300	B30-R10000
Fig. 70	B30-25-595-ANSINO		4.000 (101.6)	6.000 (152.4)	-	1	175	B30-R10000
<b>Pre-Printed GHS/CLP Chemical (B-7569):</b>								
L4B Diamond + Text	B30-260-7569-CLP4B		2.170 (55.0)	3.350 (85.1)	-	1	340	B30-R10000
	B30-261-7569-CLP4B		2.950 (75.0)	4.330 (110.0)	-	1	270	B30-R10000
L4C Diamond + Text	B30-18-7569-CLP4C		1.000 (25.4)	3.000 (76.2)	-	1	1000	B30-R10000

(B-595) U.S. Patent Nos. 5,823,689; 6,570,602. Additional Patents Pending.

## Repositionable Multi-Purpose Vinyl (B-581)

- Aggressive adhesive stays in place but removes cleanly without leaving adhesive residue
- Ideal for temporary, removable and repositionable facility labels, such as Lean / 5S inventory labels



For XY-Cutter	Diagram	Catalog #	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
-	Fig. 3	B30C-500-581-WT	White	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-581-WT	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-581-WT	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
X	Fig. 3	B30C-4000-581-WT	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-500-581-YL	Yellow	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-581-YL	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-581-YL	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
X	Fig. 3	B30C-4000-581-YL	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000

## Printable Magnetic Labels (B-509)

- Easiest and quickest material for removing and repositioning
- Non-adhesive magnetic material that can be printed on directly
- Ideal for changing shelf storage locations, and reusable/repositionable Lean / 5S applications





Diagram	Catalog #	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
Fig. 3b	B30C-2500-509-WT	White	2.500 (63.5)	25 (7.62)	1 roll (cont.)	B30-R10000
Fig. 3b	B30C-4250-509-WT	White	4.250 (107.8)	25 (7.62)	1 roll (cont.)	B30-R10000
Fig. 3b	B30C-2500-509-YL	Yellow	2.500 (63.5)	25 (7.62)	1 roll (cont.)	B30-R10000
Fig. 3b	B30C-4250-509-YL	Yellow	4.250 (107.8)	25 (7.62)	1 roll (cont.)	B30-R10000



## ToughStripe® Printable Floor Marking Tape (B-483A with overlamine)


- Revolutionary B-483A material has ultra-aggressive adhesive
- Withstands forklift and pallet jack traffic without tearing or lifting
- Each roll ships with a roll of clear overlamine which must be applied over printed label and onto appropriate surface for best performance



For XY-Cutter	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
-	Fig. 3b	B30C-1125-483WT-KT	B-483	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R6000
-	Fig. 3b	B30C-2250-483WT-KT	B-483	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R6000
-	Fig. 3b	B30C-3000-483WT-KT	B-483	White	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R6000
✂	Fig. 3b	B30C-4000-483WT-KT	B-483	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R6000
-	Fig. 3b	B30C-1125-483YL-KT	B-483	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R6000
-	Fig. 3b	B30C-2250-483YL-KT	B-483	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R6000
-	Fig. 3b	B30C-3000-483YL-KT	B-483	Yellow	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R6000
✂	Fig. 3b	B30C-4000-483YL-KT	B-483	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R6000
-	Fig. 3b	B30C-1125-483RD-KT	B-483	Red	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
-	Fig. 3b	B30C-2250-483RD-KT	B-483	Red	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
✂	Fig. 3b	B30C-4000-483RD-KT	B-483	Red	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
-	Fig. 3b	B30C-1125-483BL-KT	B-483	Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
-	Fig. 3b	B30C-2250-483BL-KT	B-483	Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
✂	Fig. 3b	B30C-4000-483BL-KT	B-483	Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
-	Fig. 3b	B30C-1125-483GN-KT	B-483	Green	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
-	Fig. 3b	B30C-2250-483GN-KT	B-483	Green	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
✂	Fig. 3b	B30C-4000-483GN-KT	B-483	Green	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
-	Fig. 3b	B30C-1125-483BK-KT	B-483	Black	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
-	Fig. 3b	B30C-2250-483BK-KT	B-483	Black	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
✂	Fig. 3b	B30C-4000-483BK-KT	B-483	Black	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
-	Fig. 3b	B30C-1125-483OR-KT	B-483	Orange	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R6000
-	Fig. 3b	B30C-2250-483OR-KT	B-483	Orange	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R6000
✂	Fig. 3b	B30C-4000-483OR-KT	B-483	Orange	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R6000

## Retro Reflective All-Weather Labels (B-584)

- Highly reflective material shines back brightly when struck by light
- Ideal for labeling outdoor utility pedestals, hard hats, jobsite equipment and roof-top equipment
- Recommended for low light or inclement weather conditions



For XY-Cutter	Diagram	Catalog #	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
-	Fig. 3	B30C-1125-584-SL	Silver	1.125 (28.6)	50 (15.2)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-584-SL	Silver	2.250 (57.5)	50 (15.2)	1 roll (cont.)	B30-R10000
✂	Fig. 3	B30C-4000-584-SL	Silver	4.000 (101.6)	50 (15.2)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-584-YL	Yellow	1.125 (28.6)	50 (15.2)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-584-YL	Yellow	2.250 (57.5)	50 (15.2)	1 roll (cont.)	B30-R10000
✂	Fig. 3	B30C-4000-584-YL	Yellow	4.000 (101.6)	50 (15.2)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-584-OR	Orange	1.125 (28.6)	50 (15.2)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-584-OR	Orange	2.250 (57.5)	50 (15.2)	1 roll (cont.)	B30-R10000
✂	Fig. 3	B30C-4000-584-OR	Orange	4.000 (101.6)	50 (15.2)	1 roll (cont.)	B30-R10000

## BradyGlo™ High-Intensity Glow-in-the-Dark Labels (B-526)

- For glow-in-the-dark identification up to 10 hours
- Designed for directional, evacuation and equipment marking. Ideal for marking emergency utility shut-offs, fire extinguishers, alarm pulls and vital equipment controls
- Complies with indoor use requirements specified in RS 6-1 and 6-1A of New York Local Law 26




Diagram	Catalog #	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
Fig. 3	B30C-1125-526	Luminous Green	1.125 (28.6)	50 (15.2)	1 roll (cont.)	B30-R10000
Fig. 3	B30C-2250-526	Luminous Green	2.250 (57.5)	50 (15.2)	1 roll (cont.)	B30-R10000
Fig. 3	B30C-4000-526	Luminous Green	4.000 (101.6)	50 (15.2)	1 roll (cont.)	B30-R10000



## ToughWash® Washdown Resistant Labels (B-854, B-855)

- Withstands high pressure, heat, harsh chemicals and numerous washdown cycles
- Legible and long-lasting for even the toughest washdown cycles
- Ideal for use in the food and beverage industry
- B-854 offers metal detectable layer to allow detection in food stream

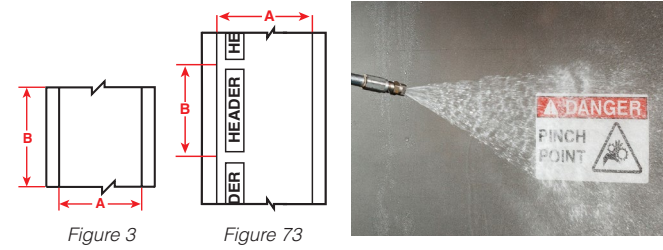


Diagram	Catalog #	B#	Color/ Header	Label Width A Inch (mm)	Length B Inch (mm)	Labels Per Roll	Rec. Ribbon
<b>ToughWash Metal Detectable Material (B-854):</b>							
Fig. 3	B30C-4000-854-YL	B-854		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
Fig. 3	B30C-4000-854-WT	B-854		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
Fig. 73	B30-25-854-OSHADA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
Fig. 73	B30-25-854-ANSIWA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
Fig. 73	B30-25-854-ANSIDA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
Fig. 73	B30-25-854-ANSICA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
<b>ToughWash Material (B-855):</b>							
Fig. 3	B30C-1125-855-YL	B-855		1.125 (28.6)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
Fig. 3	B30C-2250-855-YL	B-855		2.250 (57.5)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
Fig. 3	B30C-4000-855-YL	B-855		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
Fig. 3	B30C-1125-855-WT	B-855		1.125 (28.6)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
Fig. 3	B30C-2250-855-WT	B-855		2.250 (57.5)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
Fig. 3	B30C-4000-855-WT	B-855		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
Fig. 73	B30-25-855-OSHADA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
Fig. 73	B30-25-855-ANSIWA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
Fig. 73	B30-25-855-ANSIDA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
Fig. 73	B30-25-855-ANSICA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000

## Cold Temperature Application Labels (B-549)

- Special adhesive permanently adheres to extremely cold surfaces
- Can be applied in -10° F and lasts in -40° F
- Ideal for cold storage warehouses, coolers, freezers and short-term winter outdoor use



For XY-Cutter	Diagram	Catalog #	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
-	Fig. 3	B30C-1125-549-WT	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-549-WT	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
✗	Fig. 3	B30C-4000-549-WT	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-549-YL	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-549-YL	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
✗	Fig. 3	B30C-4000-549-YL	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000

## Raised Profile Labels – Engraved Plate Substitutes – Push Button Style (B-593)

- Costs up to 80% less than engraved legend plates
- High gloss, polyester label with thick raised profile and ultra-aggressive adhesive (0.70 mm thick)
- High-performance, low-cost substitute to engraved plates
- 10-year outdoor durability rating
- 5 push button sizes (including keyed and non-keyed 22.5 mm and 30.5 mm hole dia. keyed)

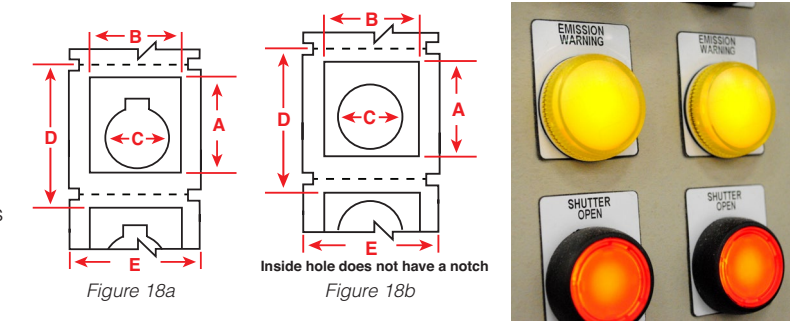


Diagram	Catalog #	Color	Label Height A Inch (mm)	Label Width B Inch (mm)	Hole Dia. C inch (mm)	Vert. repeat D Inch (mm)	Web width E Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Fig. 18a	B30EP-167-593-WT	White	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R6000
Fig. 18b	B30EP-167U-593-WT	White	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R6000
Fig. 18a	B30EP-169-593-WT	White	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	2.000 (50.8)	2.500 (63.5)	1	190	B30-R6000
Fig. 18a	B30EP-168-593-WT	White	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	2.125 (54.0)	2.500 (63.5)	1	180	B30-R6000
Fig. 18a	B30EP-170-593-WT	White	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	2.625 (66.7)	3.250 (82.6)	1	145	B30-R6000
Fig. 18a	B30EP-167-593-YL	Yellow	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R6000
Fig. 18b	B30EP-167U-593-YL	Yellow	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R6000
Fig. 18a	B30EP-169-593-YL	Yellow	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	2.000 (50.8)	2.500 (63.5)	1	190	B30-R6000
Fig. 18a	B30EP-168-593-YL	Yellow	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	2.125 (54.0)	2.500 (63.5)	1	180	B30-R6000
Fig. 18a	B30EP-170-593-YL	Yellow	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	2.625 (66.7)	3.250 (82.6)	1	145	B30-R6000
Fig. 18a	B30EP-167-593-BK	Black	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R4400-WT
Fig. 18b	B30EP-167U-593-BK	Black	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R4400-WT
Fig. 18a	B30EP-169-593-BK	Black	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	2.000 (50.8)	2.500 (63.5)	1	190	B30-R4400-WT
Fig. 18a	B30EP-168-593-BK	Black	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	2.125 (54.0)	2.500 (63.5)	1	180	B30-R4400-WT
Fig. 18a	B30EP-170-593-BK	Black	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	2.625 (66.7)	3.250 (82.6)	1	145	B30-R4400-WT
Fig. 18a	B30EP-167-593-GN	Green	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R4400-WT
Fig. 18b	B30EP-167U-593-GN	Green	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R4400-WT
Fig. 18a	B30EP-169-593-GN	Green	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	2.000 (50.8)	2.500 (63.5)	1	190	B30-R4400-WT
Fig. 18a	B30EP-168-593-GN	Green	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	2.125 (54.0)	2.500 (63.5)	1	180	B30-R4400-WT
Fig. 18a	B30EP-170-593-GN	Green	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	2.625 (66.7)	3.250 (82.6)	1	145	B30-R4400-WT
Fig. 18a	B30EP-167-593-RD	Red	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R4400-WT
Fig. 18b	B30EP-167U-593-RD	Red	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R4400-WT
Fig. 18a	B30EP-169-593-RD	Red	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	2.000 (50.8)	2.500 (63.5)	1	190	B30-R4400-WT
Fig. 18a	B30EP-168-593-RD	Red	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	2.125 (54.0)	2.500 (63.5)	1	180	B30-R4400-WT
Fig. 18a	B30EP-170-593-RD	Red	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	2.625 (66.7)	3.250 (82.6)	1	145	B30-R4400-WT



## Raised Profile Labels – Engraved Plate Substitutes – Rectangular Style (B-593)

- Costs up to 80% less than engraved legend plates
- High-gloss, polyester label with thick raised profile and ultra-aggressive adhesive (0.70 mm thick)
- Ideal for front-of-panel identification as well as inside-panel backer board labels and component identification
- Costs up to 80% less than engraved plates and prints out in about 4 seconds
- 10-year outdoor durability rating





Figure 18c



Diagram	Catalog #	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Fig. 18c	B30EP-171-593-WT	White	1.060 (26.9)	0.490 (12.5)	0.750 (19.1)	1.375 (34.9)	1	500	B30-R6000
Fig. 18c	B30EP-172-593-WT	White	1.770 (45.0)	0.590 (15.0)	0.850 (21.6)	2.500 (63.5)	1	450	B30-R6000
Fig. 18c	B30EP-175-593-WT	White	3.000 (76.2)	0.750 (19.1)	1.000 (25.4)	3.250 (82.6)	1	375	B30-R6000
Fig. 18c	B30EP-173-593-WT	White	2.000 (50.8)	1.000 (25.4)	1.250 (31.8)	2.500 (63.5)	1	300	B30-R6000
Fig. 18c	B30EP-174-593-WT	White	4.000 (101.6)	1.000 (25.4)	1.250 (31.8)	4.250 (108.0)	1	300	B30-R6000
Fig. 18c	B30EP-176-593-WT	White	3.000 (76.2)	1.000 (25.4)	1.250 (31.8)	3.250 (82.6)	1	300	B30-R6000
Fig. 18c	B30EP-177-593-WT	White	3.000 (76.2)	2.500 (63.5)	2.750 (69.9)	3.250 (82.6)	1	125	B30-R6000
Fig. 18c	B30EP-171-593-YL	Yellow	1.060 (26.9)	0.490 (12.5)	0.750 (19.1)	1.375 (34.9)	1	500	B30-R6000
Fig. 18c	B30EP-172-593-YL	Yellow	1.770 (45.0)	0.590 (15.0)	0.850 (21.6)	2.500 (63.5)	1	450	B30-R6000
Fig. 18c	B30EP-175-593-YL	Yellow	3.000 (76.2)	0.750 (19.1)	1.000 (25.4)	3.250 (82.6)	1	375	B30-R6000
Fig. 18c	B30EP-173-593-YL	Yellow	2.000 (50.8)	1.000 (25.4)	1.250 (31.8)	2.500 (63.5)	1	300	B30-R6000
Fig. 18c	B30EP-174-593-YL	Yellow	4.000 (101.6)	1.000 (25.4)	1.250 (31.8)	4.250 (108.0)	1	300	B30-R6000
Fig. 18c	B30EP-176-593-YL	Yellow	3.000 (76.2)	1.000 (25.4)	1.250 (31.8)	3.250 (82.6)	1	300	B30-R6000
Fig. 18c	B30EP-177-593-YL	Yellow	3.000 (76.2)	2.500 (63.5)	2.750 (69.9)	3.250 (82.6)	1	125	B30-R6000
Fig. 18c	B30EP-171-593-BK	Black	1.060 (26.9)	0.490 (12.5)	0.750 (19.1)	1.375 (34.9)	1	500	B30-R4400-WT
Fig. 18c	B30EP-172-593-BK	Black	1.770 (45.0)	0.590 (15.0)	0.850 (21.6)	2.500 (63.5)	1	450	B30-R4400-WT
Fig. 18c	B30EP-175-593-BK	Black	3.000 (76.2)	0.750 (19.1)	1.000 (25.4)	3.250 (82.6)	1	375	B30-R4400-WT
Fig. 18c	B30EP-173-593-BK	Black	2.000 (50.8)	1.000 (25.4)	1.250 (31.8)	2.500 (63.5)	1	300	B30-R4400-WT
Fig. 18c	B30EP-174-593-BK	Black	4.000 (101.6)	1.000 (25.4)	1.250 (31.8)	4.250 (108.0)	1	300	B30-R4400-WT
Fig. 18c	B30EP-176-593-BK	Black	3.000 (76.2)	1.000 (25.4)	1.250 (31.8)	3.250 (82.6)	1	300	B30-R4400-WT
Fig. 18c	B30EP-177-593-BK	Black	3.000 (76.2)	2.500 (63.5)	2.750 (69.9)	3.250 (82.6)	1	125	B30-R4400-WT
Fig. 18c	B30EP-171-593-GN	Green	1.060 (26.9)	0.490 (12.5)	0.750 (19.1)	1.375 (34.9)	1	500	B30-R4400-WT
Fig. 18c	B30EP-172-593-GN	Green	1.770 (45.0)	0.590 (15.0)	0.850 (21.6)	2.500 (63.5)	1	450	B30-R4400-WT
Fig. 18c	B30EP-175-593-GN	Green	3.000 (76.2)	0.750 (19.1)	1.000 (25.4)	3.250 (82.6)	1	375	B30-R4400-WT
Fig. 18c	B30EP-173-593-GN	Green	2.000 (50.8)	1.000 (25.4)	1.250 (31.8)	2.500 (63.5)	1	300	B30-R4400-WT
Fig. 18c	B30EP-174-593-GN	Green	4.000 (101.6)	1.000 (25.4)	1.250 (31.8)	4.250 (108.0)	1	300	B30-R4400-WT
Fig. 18c	B30EP-176-593-GN	Green	3.000 (76.2)	1.000 (25.4)	1.250 (31.8)	3.250 (82.6)	1	300	B30-R4400-WT
Fig. 18c	B30EP-177-593-GN	Green	3.000 (76.2)	2.500 (63.5)	2.750 (69.9)	3.250 (82.6)	1	125	B30-R4400-WT
Fig. 18c	B30EP-171-593-RD	Red	1.060 (26.9)	0.490 (12.5)	0.750 (19.1)	1.375 (34.9)	1	500	B30-R4400-WT
Fig. 18c	B30EP-172-593-RD	Red	1.770 (45.0)	0.590 (15.0)	0.850 (21.6)	2.500 (63.5)	1	450	B30-R4400-WT
Fig. 18c	B30EP-173-593-RD	Red	2.000 (50.8)	1.000 (25.4)	1.250 (31.8)	2.500 (63.5)	1	300	B30-R4400-WT
Fig. 18c	B30EP-174-593-RD	Red	4.000 (101.6)	1.000 (25.4)	1.250 (31.8)	4.250 (108.0)	1	300	B30-R4400-WT
Fig. 18c	B30EP-171-593-SL	Silver	1.060 (26.9)	0.490 (12.5)	0.750 (19.1)	1.375 (34.9)	1	500	B30-R6000
Fig. 18c	B30EP-172-593-SL	Silver	1.770 (45.0)	0.590 (15.0)	0.850 (21.6)	2.500 (63.5)	1	450	B30-R6000
Fig. 18c	B30EP-173-593-SL	Silver	2.000 (50.8)	1.000 (25.4)	1.250 (31.8)	2.500 (63.5)	1	300	B30-R6000
Fig. 18c	B30EP-174-593-SL	Silver	4.000 (101.6)	1.000 (25.4)	1.250 (31.8)	4.250 (108.0)	1	300	B30-R6000

## Product Identification Materials

- A variety of polyester and specialty materials in wide 4-in. format rolls designed for shape cutting multiple labels out of a single continuous roll
- Ideal for smaller volume custom product and general identification labels
- Proven materials with agency approvals for product identification and asset tracking applications



Material	Color	Service temp:	RoHS
B-424: Paper	Matte bright white	-40 to 124° F	RoHS
B-423: Polyester with standard adhesive	Gloss white	-94 to 248° F	RoHS
B-428: Metallized polyester with standard adhesive for smooth surfaces	Matte silver	-40 to 293° F	RoHS
B-432: Polyester with stronger adhesive	Clear	-40 to 212° F	RoHS
B-434: Metallized polyester with stronger adhesive for textured surfaces	Gloss silver	-40 to 194° F	RoHS
B-437: *Tedlar® for high-temp labeling and cable wraps	Matte white	-94 to 275° F	RoHS
B-480: Non-metal polyester with rubber-based adhesive for oily / greasy surfaces	Satin light gray	-94 to 248° F	RoHS
B-483: Polyester with ultra-aggressive adhesive for rough surfaces	Gloss white	-94 to 248° F	RoHS
B-484: Polyester with ultra-aggressive adhesive and pliability for angular surfaces	Gloss white	-40 to 240° F	RoHS
B-489: Polyester with ultra-aggressive adhesive for rough surfaces	Matte white	-94 to 248° F	RoHS
B-488: Polyester with standard adhesive and chemical resistance	Matte white	-40 to 320° F	RoHS
B-486: Metallized polyester with ultra-aggressive adhesive for rougher surfaces	Matte silver	-40 to 248° F	RoHS
B-498: Vinyl cloth	Semi-gloss white	-40 to 175° F	RoHS
B-565: Metallized polyester with standard adhesive	Matte silver	-40 to 240° F	RoHS
B-595: Indoor / outdoor vinyl	Semi-gloss white	-40 to 180° F	RoHS
B-724: Polyimide label for extremely high temperatures	Matte amber	-94 to 518° F	RoHS
B-727: Polyimide label for standard temperatures	Gloss white	-94 to 212° F	RoHS
B-787: Polyvinylfluoride tape	Gloss white	-94 to 212° F	RoHS

For XY-Cutter	Catalog #	B#	Color	Label width A inch (mm)	Roll length B feet (m)	Labels per roll	Rec. ribbon
✗	B30C-4000-423	B-423	White	4.000 (101.6)	150 (45.7)	1 roll (cont.)	B30-R6000
✗	B30C-4000-424	B-424	White	4.000 (101.6)	150 (45.7)	1 roll (cont.)	B30-R4300
✗	B30C-4000-432	B-432	Clear	4.000 (101.6)	120 (36.6)	1 roll (cont.)	B30-R6000
✗	B30C-4000-437	B-437	White	4.000 (101.6)	150 (45.7)	1 roll (cont.)	B30-R4300
✗	B30C-4000-483	B-483	White	4.000 (101.6)	130 (39.6)	1 roll (cont.)	B30-R6000
✗	B30C-4000-484	B-484	White	4.000 (101.6)	150 (45.7)	1 roll (cont.)	B30-R6000
✗	B30C-4000-488	B-488	White	4.000 (101.6)	130 (39.6)	1 roll (cont.)	B30-R4300
✗	B30C-4000-489	B-489	White	4.000 (101.6)	130 (39.6)	1 roll (cont.)	B30-R4300
✗	B30C-4000-595-WT	B-595	White	4.000 (101.6)	100 (30.4)	1 roll (cont.)	B30-R10000
✗	B30C-4000-727	B-727	White	4.000 (101.6)	130 (39.6)	1 roll (cont.)	B30-R6000
✗	B30C-4000-498	B-498	White	4.000 (101.6)	80 (24.4)	1 roll (cont.)	B30-R6200
✗	B30C-4000-787	B-787	White	4.000 (101.6)	60 (18.3)	1 roll (cont.)	B30-R6000
✗	B30C-4000-724	B-724	Amber	4.000 (101.6)	130 (39.6)	1 roll (cont.)	B30-R4300
✗	B30C-4000-480	B-480	Light Gray	4.000 (101.6)	115 (35.1)	1 roll (cont.)	B30-R6000
✗	B30C-4000-428	B-428	Silver	4.000 (101.6)	130 (39.6)	1 roll (cont.)	B30-R4300
✗	B30C-4000-434	B-434	Silver	4.000 (101.6)	130 (39.6)	1 roll (cont.)	B30-R6000
✗	B30C-4000-486	B-486	Silver	4.000 (101.6)	115 (35.1)	1 roll (cont.)	B30-R4300
✗	B30C-4000-565-SL	B-565	Silver	4.000 (101.6)	100 (30.4)	1 roll (cont.)	B30-R10000

\*Tedlar is a registered trademark of E.I. DuPont De Nemours and Company



## Tamper-Evident Asset ID Labels

### (B-438)

- Leaves checkerboard footprint on surface and on label if removed to prevent re-use






Diagram	Catalog #	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Roll	Rec. Ribbon
Fig. 5	B30-17-438	Matte Silver	2.000 (50.8)	1.000 (25.4)	1225	B30-R4300
Fig. 5	B30-18-438	Matte Silver	3.000 (76.2)	1.000 (25.4)	1225	B30-R4300
Fig. 5	B30-222-438	Matte Silver	3.000 (76.2)	2.000 (50.8)	650	B30-R4300
Fig. 6	B30C-3000-438-SL	Matte Silver	3.000 (76.2)	100 ft. (30.5 m)	1 roll (cont.)	B30-R4300

## Metallized Polyester Labels

### (B-565)

- For product labeling, asset tracking and general industrial identification
- Ideal for serial number plates and rating plates with name-plate quality and metal-looking finish



Catalog #	Color	Label Width A Inch (mm)	Label Height B Feet (m)	Labels Per Roll	Rec. Ribbon
B30C-1125-565-SL	Matte Silver	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R4300
B30C-2250-565-SL	Matte Silver	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R4300

## Standard Adhesion Polyester Labels

### (B-423)

- For general purpose identification, product labels and post-process circuit board identification
- Adheres best to flat, smooth surfaces. Consult technical data sheet for UL / CSA ratings and complete performance and testing details





Diagram	Catalog #	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Rec. Ribbon
Fig. 3a	B30C-2000-423	Gloss White	2.000 (50.8)	100 ft. (30.5 m)	2.250 (57.2)	1 roll (cont.)	B30-R6000
Fig. 3a	B30C-3000-423	Gloss White	3.000 (76.2)	100 ft. (30.5 m)	3.250 (82.6)	1 roll (cont.)	B30-R6000

## Standard Adhesion Metallized Polyester Labels

### (B-428)

- For labeling applications where a metal label or metal appearance is required
- Ideal for rating plates and product labels
- Adheres best to flat, smooth surfaces
- Consult technical data sheet for UL / CSA ratings and complete performance and testing details




Diagram	Catalog #	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Rec. Ribbon
Fig. 3a	B30C-2000-428	Matte Lt. Gray	2.000 (50.8)	100 ft. (30.5 m)	2.250 (57.2)	1 roll (cont.)	B30-R4300

## High Adhesion Metallized Polyester Labels

### (B-434A)

- Ideal for rating plates and product labels
- Adheres best to flat and smooth or textured surfaces or when extra adhesion is required
- Consult technical data sheet for UL / CSA ratings and complete performance and testing details




Diagram	Catalog #	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Rec. Ribbon
High gloss silver metallized polyester with high adhesion for textured surfaces (B-434A)							
Fig. 3a	B30C-2000-434	Gloss Silver	2.000 (50.8)	100 ft. (30.5 m)	2.250 (57.2)	1 roll (cont.)	B30-R6000
Fig. 3a	B30C-3000-434	Gloss Silver	3.000 (76.2)	100 ft. (30.5 m)	3.250 (82.6)	1 roll (cont.)	B30-R6000



## Ultra Aggressive Adhesive High Temp and Chemical Resistant Polyester Labels (B-443)

- For labeling applications where chemical-resistance, self-extinguishing and short-term high-temp properties are required
- Superior resistance to chemicals and fluids that do not have a high pH value
- Excellent long-term temperature resistance and very high short-term temperature resistance to 410°F
- Best for flat and smooth or textured surfaces
- Consult technical data sheet for complete testing and performance details




Diagram	Catalog #	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Rec. Ribbon
Fig. 3a	B30C-2000-443	Matte White	2.000 (50.8)	100 ft. (30.5 m)	2.250 (57.2)	1 roll (cont.)	B30-R6400
Fig. 3a	B30C-3000-443	Matte White	3.000 (76.2)	100 ft. (30.5 m)	3.250 (82.6)	1 roll (cont.)	B30-R6400
Fig. 3a	B30C-4000-443	Matte White	4.000 (101.6)	100 ft. (30.5 m)	4.250 (107.6)	1 roll (cont.)	B30-R6400

## Paper Labels (B-424)

- Economical choice for light duty part labeling, box labels and general identification
- Bright white finish with excellent image contrast and smear resistance for barcode printing




Diagram	Catalog #	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Rec. Ribbon
Fig. 3a	B30C-3000-424	White	3.000 (76.2)	150 ft. (45.8m)	3.250 (82.6)	1 roll (cont.)	B30-R4300

## Printer specifications

<b>Description</b>	Facility, safety and Lean / 5S printer for walk-up-and-print ease of use, fast supply changeovers, multicolor printing and ability to cut out text and shapes. Best choice for "lean event" labeling situations and multiple user locations because it has a very approachable interface and very fast supply changeovers.		
<b>Applications</b>	Facility and safety ID, signs, pipe markers, Lean / 5S, arc flash labels, GHS and chemical labels, equipment labels, hazard communication identification, inventory and inspection labeling, temporary labeling, warehouse marking, panel and push-button labels, reflective and glow-in-the-dark labels, tags, magnetic, cold-temp labeling. Cut out text and shapes.		
<b>Printer catalog number</b>	S3700		
<b>Label material types</b>	Extremely aggressive 8 to 10 year outdoor vinyl with high tack and chemical resistance, plus ToughStripe® floor tape, wash-down material, 10-hr glow in the dark, reflective, magnetic, tags, engraved plate substitute and 30 other materials.		
<b>Includes</b>	Printer, power cord, USB cable, cleaning kit, quick start guide, BradyWorkstation software		
<b>Warranty</b>	5 year		
<b>Features</b>			
<b>Print resolution</b>	300 dpi	<b>Cutter type</b>	Auto cutter. XY cutter.
<b>Color printing capability</b>	Multi-color	<b>Media sensor adjustment</b>	Not Required
<b>Maximum print speed</b>	5 in. / sec		
<b>Interface</b>			
<b>Display type</b>	Color touchscreen	<b>Supply remaining gauge</b>	Yes
<b>Display size</b>	3.42 in x 6.11 in	<b>Languages</b>	English, Spanish, Portuguese, French
<b>Keyboard type</b>	Full size QWERTY	<b>Units</b>	Inches, millimeters, points
<b>Stand-alone apps and editing</b>			
<b>Built-in label wizards</b>	Custom label GHS / CLP Safety signs Pipe marker Arc flash	Circle gauge Gradient scale Right-to-know WHMIS Tags	General templates Quick label PreMade
<b>Fonts, graphics, symbols</b>			
<b>Font sizes</b>	4 pt (minimum)	<b>Symbols categories</b>	Arrows, Fire Safety, First Aid/Rescue, Hazardous Transport, Hazmat GHS / CLP, Hazmat HSID, Imported Graphics, ISO Graphics, Mandatory
<b>Font styles</b>	Arial, Arial 65, Courier New, Tahoma, Times New Roman, MS Gothic, Trebuchet MS, Verdana plus more with Brady Workstation. TrueType fonts storable to printer	<b>Barcode symbologies — linear</b>	Code 39 Code 128 Auto Interleaved 2 of 5 EAN-13 UPC-A More through Brady WorkStation
<b>Symbols quantity</b>	664	<b>Barcode symbologies — 2D</b>	QR Code PDF417
<b>Media / supplies information</b>			
<b>Compatible media</b>	B30 Series	<b>Ribbon and label installation</b>	<b>Media:</b> Supplied in cartridge, drops into place, 20 sec changeover <b>Ribbon:</b> Supplied in cartridge, snaps into place, 20 sec changeover
<b>Compatible ribbons</b>	R10000	<b>Custom media parts available</b>	No
<b>Die-cuts vs continuous</b>	Continuous tapes, pre-printed die-cut labels, general die-cut labels	<b>Media widths</b>	0.5 to 4 in
<b>Software and connectivity</b>			
<b>Connectivity options</b>	Stand-alone use, Ethernet, USB, Mobile device connected, PC connectable (optional)		
<b>Software compatibility</b>	Brady Workstation		
<b>Physical / operational characteristics</b>			
<b>Dimensions</b>	11 in. H x 19 in. W x 14.25 in. D	<b>Operating humidity range</b>	15% to 80% RH Non-Condensing
<b>Weight</b>	36.9 lbs.	<b>Storage humidity range</b>	15% to 90% RH Non-Condensing
<b>Operating temperature range</b>	50° to 104°F	<b>Power supply voltage</b>	110V - 240V
<b>Storage temperature range</b>	-4° to 122°F	<b>Auto shutoff / Power conserve</b>	Yes
<b>Agency approvals / regulatory compliance</b>			
<b>Enables industry compliance</b>	USA and Canada - cULc Europe - CE (including Eu RoHS) Argentina - UL-AR and S Mark Mexico - UL NOM CoC	Australia - RCM mark Russia - EAC Korea - KC China - CCC and RoHS India - BIS Taiwan - BSMI Exemption South Africa - LOA and SABS (No logo on product label)	
<b>U.S. patents</b>	Multiple U.S. Patents Apply Printers: 6364552 B1; 6788324; 6768502 B2 BBP37 Printer only: 6664995 B2; Ribbon cartridges: 6860658 B2; D480749		





We make products that make the world a safer and smarter place. From the depths of the ocean to outer space, from the factory floor to the delivery room — **we're just about everywhere you look.**

► For more information or to learn more about our innovative products, visit [BradyID.com](https://BradyID.com) or call 1-888-272-3946.

USA  
Customer Service: 1-888-272-3946  
[BradyID.com](https://BradyID.com)

Canada  
Customer Service: 1-800-263-6179  
[BradyCanada.ca](https://BradyCanada.ca)

Mexico  
Customer Service: 1-800-262-7777  
Inside Sales: 1-800-262-7777 ext 177  
[BradyID.com.mx](https://BradyID.com.mx)



Y5267012 MS5267012