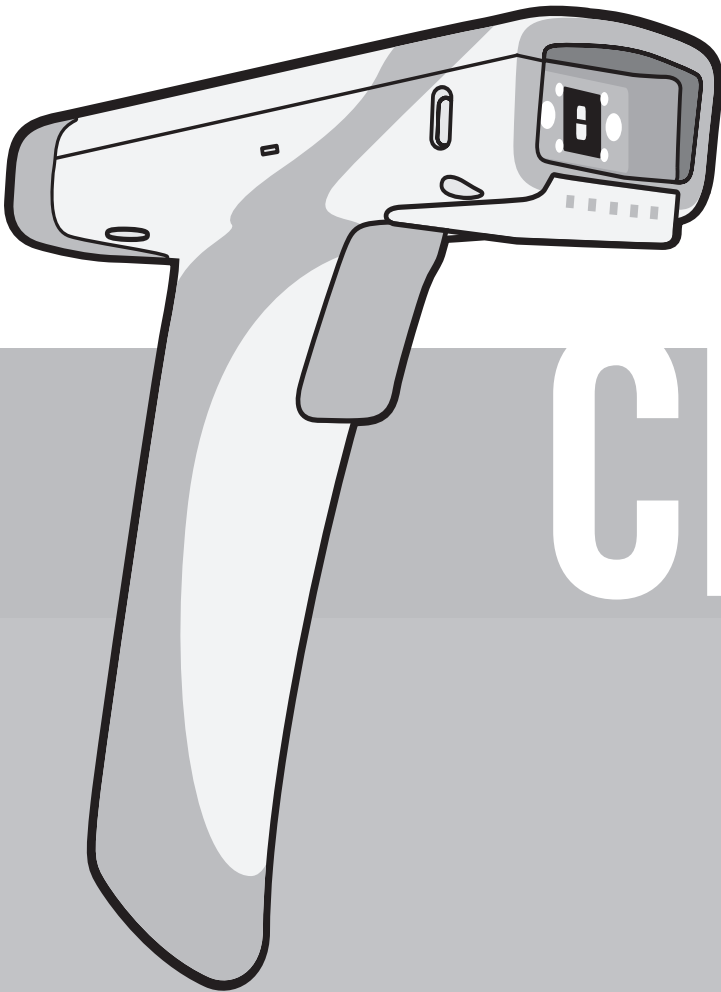


CONFIGURATION GUIDE



CR2600

Configuration barcodes generated based on current firmware versions
WEB GENERATED
4-29-2020



www.codecorp.com



User Manual



[YouTube.com/codecorporation](https://www.youtube.com/codecorporation)

code
ADVANCED BARCODE READERS

Table of Contents

Bluetooth Settings.....	7
Bluetooth Radio Disconnect (Reconnect via Quick Connect Barcode).....	7 (A2)
Bluetooth Auto Reconnect On - Default.....	7 (A3)
Bluetooth Auto Reconnect Off.....	7 (A4)
Bluetooth Radio Out of Range Beep On	7 (B1)
Bluetooth Radio Out of Range Beep and Vibrate Off - Default.....	7 (B2)
Bluetooth Radio Out of Range Beep and Vibrate On.....	7 (B3)
Bluetooth Radio Out of Range Vibrate On	7 (B4)
Bluetooth® HID Keyboard Mode.....	7 (C1)
Enable SPP Discoverable Mode.....	7 (C2)
Disable SPP Discoverable Mode - Default.....	7 (C3)
Bluetooth® Serial Port Profile (SPP) Mode.....	7 (C4)
Batch Mode Settings.....	7-8
Batch Mode Disable - Default.....	7 (D2)
Batch Mode Enable - Log Only.....	7 (D3)
Batch Mode Enable - Send and Log.....	7 (D4)
Batch Mode Auto Transfer Buffer Memory On.....	7 (E1)
Batch Mode Auto Transfer Buffer Memory Off.....	7 (E2)
Batch Mode Transfer All Data and Images in Memory.....	7 (E3)
Batch Mode Transfer Only Unsent Data in Memory.....	7 (E4)
Delete Buffered Scan Data.....	8 (A1)
USB Keyboard Mode - Batch Mode Only.....	8 (A2)
USB Virtual COM One Way Mode.....	8 (A3)
USB Speed High Speed - Batch Mode Only - Default.....	8 (A4)
USB Speed Full Speed - Batch Mode Only.....	8 (B1)
General Modem Settings.....	8
Preemptive Mode On.....	8 (B3)
Preemptive Mode Off - Default.....	8 (B4)
Reader Paging On - Default.....	8 (C1)
Reader Paging Off.....	8 (C2)
Modem - USB IBM POS Mode.....	8 (C3)
General Reading Mode Settings.....	8-9
Continuous Scan On.....	8 (D2)
Continuous Scan Off - Default.....	8 (D3)
Mountable Palm Charger Motion Detection - On.....	8 (D4)
Mountable Palm Charger Motion Detection - Off.....	8 (E1)
Anti-Glare On.....	8 (E2)
Anti-Glare Off - Default.....	8 (E3)
Mirroring On.....	8 (E4)
Mirroring Off - Default.....	9 (A1)
Targeting On - Default.....	9 (A2)
Targeting Off.....	9 (A3)
Cell Phone Reading Enhancement On.....	9 (A4)
Cell Phone Reading Enhancement Off - Default.....	9 (B1)
Data Formatting (Prefix/Suffix) Settings.....	9-10
Turn on Timestamp Prefix.....	9 (B3)
Turn off Timestamp Prefix - Default.....	9 (B4)
Convert output to lowercase.....	9 (C1)
Erase Prefix & Suffix Data - Default.....	9 (C2)
Erase Prefix Data - Default.....	9 (C3)
Erase Suffix Data - Default.....	9 (C4)
Prefix AIM ID On.....	9 (D1)
Prefix AIM ID Off - Default.....	9 (D2)
Prefix Carriage Return Line Feed (RS232 Mode Only).....	9 (D3)
Prefix Comma.....	9 (D4)
Prefix Space.....	9 (E1)
Prefix Tab (USB Keyboard Mode Only).....	9 (E2)

Table of Contents

Prefix Tab (RS232 Mode Only).....	9 (E3)
Suffix Carriage Return (RS232 Mode Only).....	9 (E4)
Suffix Carriage Return Line Feed (RS232 Mode Only).....	10 (A1)
Suffix Comma.....	10 (A2)
Suffix Enter (USB Keyboard Mode Only).....	10 (A3)
Suffix Line Feed (RS232 Mode Only).....	10 (A4)
Suffix Space.....	10 (B1)
Suffix Tab (USB Keyboard Mode Only).....	10 (B2)
Suffix Tab (RS232 Mode Only).....	10 (B3)
Translate all Characters to Uppercase On.....	10 (B4)
Translate all Characters to Uppercase Off - Default.....	10 (C1)
Symbology Settings.....	10-17
Australian Post On.....	10 (C3)
Australian Post Off - Default.....	10 (C4)
Aztec On - Default.....	10 (D1)
Aztec Inverse On.....	10 (D2)
Aztec Inverse & Normal On.....	10 (D3)
Aztec Off.....	10 (D4)
Codabar On - Default.....	10 (E1)
Codabar Off.....	10 (E2)
Remove Codabar Start and Stop Delimiters.....	10 (E3)
Keep Codabar Start and Stop Delimiters - Default.....	10 (E4)
Codablock F On.....	11 (A1)
Codablock F Off - Default.....	11 (A2)
Code 11 On.....	11 (A3)
Code 11 Off - Default.....	11 (A4)
Code 11 Checksum Stripped from Result On.....	11 (B1)
Code 32 (Italian Pharmacode) On.....	11 (B2)
Code 32 (Italian Pharmacode) Off - Default.....	11 (B3)
Code 39 Off.....	11 (B4)
Code 39 On - Default.....	11 (C1)
Code 39 Checksum On.....	11 (C2)
Code 39 Checksum Off - Default.....	11 (C3)
Code 39 Checksum Stripped from Result On.....	11 (C4)
Code 39 Extended Full ASCII Off - Default.....	11 (D1)
Code 39 Extended Full ASCII On.....	11 (D2)
Code 49 On.....	11 (D3)
Code 49 Off - Default.....	11 (D4)
Code 93 On - Default.....	11 (E1)
Code 93 Off.....	11 (E2)
Code 128 On - Default.....	11 (E3)
Code 128 Off.....	11 (E4)
Composite On.....	12 (A1)
Composite Off - Default.....	12 (A2)
Data Matrix Inverse On - Default.....	12 (A3)
Data Matrix Inverse Off.....	12 (A4)
Data Matrix Rectangular On & Rectangular Extended On.....	12 (B1)
Data Matrix Rectangular On & Rectangular Extended Off - Default.....	12 (B2)
Data Matrix Rectangular & Rectangular Extended Off.....	12 (B3)
Grid Matrix On.....	12 (B4)
Grid Matrix Off - Default.....	12 (C1)
All GS1 DataBar On - Default.....	12 (C2)
All GS1 DataBar Off.....	12 (C3)
GS1 DataBar Limited On.....	12 (C4)
GS1 DataBar Limited Off.....	12 (D1)
GS1 DataBar Expanded On.....	12 (D2)
GS1 DataBar Expanded Off.....	12 (D3)
GS1 DataBar Expanded Stacked On.....	12 (D4)
GS1 DataBar Expanded Stacked Off.....	12 (E1)
GS1 DataBar Stacked and GS1 DataBar Stacked Omnidirectional On.....	12 (E2)

Table of Contents

GS1 DataBar Stacked and GS1 DataBar Stacked Omnidirectional Off.....	12 (E3)
GS1 DataBar Omnidirectional and GS1 DataBar Truncated On.....	12 (E4)
GS1 DataBar Omnidirectional and GS1 DataBar Truncated Off.....	13 (A1)
Han Xin On.....	13 (A2)
Han Xin Off - Default.....	13 (A3)
Hong Kong 2 of 5 Off - Default.....	13 (A4)
Hong Kong 2 of 5 On.....	13 (B1)
Int 2 of 5 On - Default.....	13 (B2)
Int 2 of 5 Off.....	13 (B3)
Int 2 of 5 Checksum Stripped from Result On.....	13 (B4)
Int 2 of 5 Checksum On.....	13 (C1)
Int 2 of 5 Checksum Off - Default.....	13 (C2)
Japan Post On.....	13 (C3)
Japan Post Off - Default.....	13 (C4)
KIX (Dutch Post) Code On.....	13 (D1)
KIX (Dutch Post) Code Off - Default.....	13 (D2)
Korean Post On.....	13 (D3)
Korean Post Off - Default.....	13 (D4)
Maxicode On.....	13 (E1)
Maxicode Off - Default.....	13 (E2)
Matrix 2 of 5 On.....	13 (E3)
Matrix 2 of 5 Off - Default.....	13 (E4)
Micro PDF417 On.....	14 (A1)
Micro PDF417 Off - Default.....	14 (A2)
MSI Plessey On.....	14 (A3)
MSI Plessey Off - Default.....	14 (A4)
NEC 2 of 5 On.....	14 (B1)
NEC 2 of 5 Off - Default.....	14 (B2)
PDF417 On - Default.....	14 (B3)
PDF417 Off.....	14 (B4)
Pharmacode On.....	14 (C1)
Pharmacode Reverse Barcode Decoding (Right to Left).....	14 (C2)
Pharmacode Normal Barcode Decoding (Left to Right).....	14 (C3)
Pharmacode Off - Default.....	14 (C4)
All QR Code On.....	14 (D1)
Standard QR Code On - Default.....	14 (D2)
All QR Code Off.....	14 (D3)
Straight 2 of 5 On.....	14 (D4)
Straight 2 of 5 Off - Default.....	14 (E1)
Telepen On.....	14 (E2)
Output Telepen as ASCII.....	14 (E3)
Output Telepen as Numeric - Default.....	14 (E4)
Telepen Off - Default.....	15 (A1)
Trioptic On.....	15 (A2)
Trioptic - Enable Reverse Order option (Bit 3).....	15 (A3)
Trioptic - Disable Reverse Order option (Bit 3) - Default.....	15 (A4)
Trioptic Off - Default.....	15 (B1)
UK Plessey On.....	15 (B2)
UK Plessey Off - Default.....	15 (B3)
UK Royal Mail On.....	15 (B4)
UK Royal Mail Off - Default.....	15 (C1)
UPC Off.....	15 (C2)
UPC On - Default.....	15 (C3)
UPC Supplemental On.....	15 (C4)
Transmit UPC-A Number System Off.....	15 (D1)
UPC Supplemental Off - Default.....	15 (D2)
Transmit UPC-A Check Digit On - Default.....	15 (D3)
Transmit UPC-A Check Digit Off.....	15 (D4)
Transmit UPC-A Number System On - Default.....	15 (E1)
Convert UPC-A to EAN-13 On.....	15 (E2)
Convert UPC-A to EAN-13 Off - Default.....	15 (E3)

Table of Contents

UPC-E Expansion On.....	15 (E4)
UPC-E Expansion Off - Default.....	16 (A1)
Transmit UPC-E Check Digit On - Default.....	16 (A2)
Transmit UPC-E Check Digit Off.....	16 (A3)
Transmit UPC-E Number System On - Default.....	16 (A4)
Transmit UPC-E Number System Off.....	16 (B1)
Transmit EAN-8 Check Digit On - Default.....	16 (B2)
Transmit EAN-8 Check Digit Off.....	16 (B3)
Convert EAN-8 to EAN-13 On.....	16 (B4)
Convert EAN-8 to EAN-13 Off - Default.....	16 (C1)
Transmit EAN-13 Check Digit On - Default.....	16 (C2)
Transmit EAN-13 Check Digit Off.....	16 (C3)
Convert Bookland EAN-13 to ISBN On.....	16 (C4)
Convert Bookland EAN-13 to ISBN Off - Default.....	16 (D1)
Convert Bookland EAN-13 to ISSN On.....	16 (D2)
Convert Bookland EAN-13 to ISSN Off - Default.....	16 (D3)
UPU ID-Tag On.....	16 (D4)
UPU ID-Tag Off - Default.....	16 (E1)
USPS Intelligent Mail/IMB/ 4-State CB On.....	16 (E2)
USPS Intelligent Mail/IMB/ 4-State CB Off - Default.....	16 (E3)
USPS Planet On.....	16 (E4)
USPS Planet Off - Default.....	17 (A1)
USPS Postnet On.....	17 (A2)
USPS Postnet Off - Default.....	17 (A3)
Grid Matrix & Grid Matrix Inverse Decoding On.....	17 (A4)
Grid Matrix & Grid Matrix Mirror Decoding On.....	17 (B1)
Grid Matrix, Grid Matrix Inverse & Grid Matrix Mirror Decoding.....	17 (B2)
GoCode & GoCode Inverse Decoding.....	17 (B3)
GoCode & GoCode Mirror Decoding On.....	17 (B4)
GoCode, GoCode Inverse & GoCode Mirror Decoding On.....	17 (C1)
Code 11 Decoding with one checksum digit checked, and remove checksum from output On.....	17 (C2)
Keyboard Language Settings.....	17-18
Keyboard Support: French Keyboard Mapping for Apple.....	17 (C4)
Keyboard Support: USInternational (Universal) Keyboard Mapping for Windows.....	17 (D1)
English (US) Keyboard Mapping for Windows.....	17 (D2)
English (UK) Keyboard Mapping for Windows.....	17 (D3)
Belgian French Keyboard Mapping for Windows.....	17 (D4)
French Keyboard Mapping for Windows.....	17 (E1)
German Keyboard Mapping for Windows.....	17 (E2)
Japanese Keyboard Mapping for Windows.....	17 (E3)
Latin American Keyboard Mapping for Windows.....	17 (E4)
Spanish Keyboard Mapping for Windows.....	18 (A1)
Swiss German Keyboard Mapping for Windows.....	18 (A2)
English Keyboard Mapping for Apple.....	18 (A3)
Keyboard Support: Spanish Keyboard Mapping for Apple.....	18 (A4)
Italian Keyboard Mapping for Apple.....	18 (B1)
German-Swiss Keyboard Mapping for Apple.....	18 (B2)
German Keyboard Mapping for Apple.....	18 (B3)
Russian Keyboard Mapping for Windows.....	18 (B4)
Control Character Input - Ctrl + Character.....	18 (C1)
Control Character Input - Alt + Keypad.....	18 (C2)
Control Character Input -Alt + Leading Zero.....	18 (C3)
Control Character Input - Language - Default.....	18 (C4)
Data Encoding: Raw ASCII to Keyboard XML File Lookup - Default.....	18 (D1)
Data Encoding: UTF8 to Unicode Codepoint - Alt Sequences for Windows.....	18 (D2)
Reader (Legacy) - US English Keyboard Mapping - with Leading 0 for Non Printable ASCII - Default.....	18 (D3)
Shift-JIS Mode for Japanese Windows OS.....	18 (D4)
Shift-JIS Mode for English Windows OS.....	18 (E1)
Operating System Settings.....	18
Alternative Operating System (Linux/Mac) On.....	18 (E3)

Table of Contents








Alternative Operating System (Linux/Mac) Off - Default.....	18 (E4)
USB Settings (Non-Batch Mode).....	19
Modem - USB Keyboard Communication Mode - Default.....	19 (A2)
USB Downloader Mode.....	19 (A3)
Modem - USB HID POS.....	19 (A4)
Modem - USB Virtual COM Mode.....	19 (B1)
USB Settings.....	19
Reader - USB Virtual COM CDC Raw Mode.....	19 (B3)
RS232 Settings (for use with CodeXML M3 Modem Only).....	19
RS232 Communication Mode.....	19 (C2)
RS232 Interface - 9600 Baud Rate - Default.....	19 (C3)
RS232 Interface - 19200 Baud Rate.....	19 (C4)
RS232 Interface - 38400 Baud Rate.....	19 (D1)
RS232 Interface - 57600 Baud Rate.....	19 (D2)
RS232 Interface - 115200 Baud Rate.....	19 (D3)
RS232 Settings.....	19
Reader - Enable RS232 OPOS/JPOS.....	19 (E2)
Reader Feedback Settings.....	19-20
Beep On Vibrate On - Default.....	19 (E4)
Beep Off Vibrate Off.....	20 (A1)
Beep Off Vibrate On	20 (A2)
Beep On Vibrate Off	20 (A3)
Disable AES Encryption - Default.....	20 (A4)
Beep Volume 100% - Default.....	20 (B1)
Beep Volume 67%.....	20 (B2)
Beep Volume 33%.....	20 (B3)
Beep Volume 0%.....	20 (B4)
Scan Delay Settings.....	20
Duplicate Scan Disabled - Default.....	20 (C2)
1 Second Duplicate Scan Delay.....	20 (C3)
2 Second Duplicate Scan Delay.....	20 (C4)
3 Second Duplicate Scan Delay.....	20 (D1)
5 Second Duplicate Scan Delay.....	20 (D2)
10 Second Duplicate Scan Delay.....	20 (D3)
30 Second Duplicate Scan Delay.....	20 (D4)
1 Hour Duplicate Scan Delay.....	20 (E1)
1 Day Duplicate Scan Delay.....	20 (E2)
Power Settings.....	20-21
Power Off in 1 Hour.....	20 (E4)
Power Off in 2 Hour.....	21 (A1)
Power Off in 4 Hours.....	21 (A2)
Miscellaneous Settings.....	21
Read Both Wide and High Density Field - Default.....	21 (A4)
Read High Density Field Only.....	21 (B1)
Read Wide Field Only.....	21 (B2)
Enable AES Encryption.....	21 (B3)
Bottom Button Take Picture.....	21 (B4)
Top Button Take Picture.....	21 (C1)
Locked Reader Accept Host Commands - Default.....	21 (C2)
Locked Reader Reject Host Commands.....	21 (C3)
Allow Wireless Switching on a Locked Reader - Default.....	21 (C4)
Prevent Wireless Switching on a Locked Reader.....	21 (D1)
Reader/Modem Command Settings.....	21
Reader ID and Firmware Version.....	21 (D3)

Table of Contents

Modem ID and Firmware Version.....	21 (D4)
Reader Text Commands On.....	21 (E1)
Reader Text Commands Off - Default.....	21 (E2)
Reset, Clear and Save Reader Settings.....	21-22
Reset Reader to RF Factory Defaults.....	21 (E4)
Clear All JavaScript Rules.....	22 (A1)
Clear All Stored Data and Images.....	22 (A2)
Save All Reader Settings - Default.....	22 (A3)
Reboot Reader.....	22 (A4)

CR2600 Configuration Guide

NOTE: Configuration changes will take effect immediately and be saved to memory

<h2>Bluetooth Settings</h2>	<p>Bluetooth Radio Disconnect (Reconnect via Quick Connect Barcode)</p>  <p>M10177_01</p> <p style="text-align: right;">A2</p>	<p>Bluetooth Auto Reconnect On - Default</p>  <p>M10365_01</p> <p style="text-align: right;">A3</p>	<p>Bluetooth Auto Reconnect Off</p>  <p>M10364_01</p> <p style="text-align: right;">A4</p>
<p>Bluetooth Radio Out of Range Beep On</p>  <p>M10173_01</p> <p style="text-align: right;">B1</p>	<p>Bluetooth Radio Out of Range Beep and Vibrate Off - Default</p>  <p>M10176_01</p> <p style="text-align: right;">B2</p>	<p>Bluetooth Radio Out of Range Beep and Vibrate On</p>  <p>M10175_01</p> <p style="text-align: right;">B3</p>	<p>Bluetooth Radio Out of Range Vibrate On</p>  <p>M10174_01</p> <p style="text-align: right;">B4</p>
<p>Bluetooth® HID Keyboard Mode</p>  <p>M10519_01</p> <p style="text-align: right;">C1</p>	<p>Enable SPP Discoverable Mode</p>  <p>M10542_02</p> <p style="text-align: right;">C2</p>	<p>Disable SPP Discoverable Mode - Default</p>  <p>M10543_01</p> <p style="text-align: right;">C3</p>	<p>Bluetooth® Serial Port Profile (SPP) Mode</p>  <p>M10518_01</p> <p style="text-align: right;">C4</p>
<h2>Batch Mode Settings</h2>	<p>Batch Mode Disable - Default</p>  <p>M10187_04</p> <p style="text-align: right;">D2</p>	<p>Batch Mode Enable - Log Only</p>  <p>M10188_04</p> <p style="text-align: right;">D3</p>	<p>Batch Mode Enable - Send and Log</p>  <p>M10186_05</p> <p style="text-align: right;">D4</p>
<p>Batch Mode Auto Transfer Buffer Memory On</p>  <p>M10307_01</p> <p style="text-align: right;">E1</p>	<p>Batch Mode Auto Transfer Buffer Memory Off</p>  <p>M10308_01</p> <p style="text-align: right;">E2</p>	<p>Batch Mode Transfer All Data and Images in Memory</p>  <p>M10297_01</p> <p style="text-align: right;">E3</p>	<p>Batch Mode Transfer Only Unsent Data in Memory</p>  <p>M10305_01</p> <p style="text-align: right;">E4</p>


















CR2600 Configuration Guide

NOTE: Configuration changes will take effect immediately and be saved to memory

<p>Delete Buffered Scan Data</p>  <p>M10306_01</p> <p style="text-align: right;">A1</p>	<p>USB Keyboard Mode - Batch Mode Only</p>  <p>M10200_01</p> <p style="text-align: right;">A2</p>	<p>USB Virtual COM One Way Mode</p>  <p>M10005_01</p> <p style="text-align: right;">A3</p>	<p>USB Speed High Speed - Batch Mode Only - Default</p>  <p>M10160_01</p> <p style="text-align: right;">A4</p>
<p>USB Speed Full Speed - Batch Mode Only</p>  <p>M10161_01</p> <p style="text-align: right;">B1</p>	<p style="text-align: center;">Preemptive Mode Off - Default</p>	<p>Preemptive Mode On</p>  <p>M10225_02</p> <p style="text-align: right;">B3</p>	<p>Preemptive Mode Off - Default</p>  <p>M10226_02</p> <p style="text-align: right;">B4</p>
<p>Reader Paging On - Default</p>  <p>M10155_01</p> <p style="text-align: right;">C1</p>	<p>Reader Paging Off</p>  <p>M10156_01</p> <p style="text-align: right;">C2</p>	<p>Modem - USB IBM POS Mode</p>  <p>M10551_01</p> <p style="text-align: right;">C3</p>	<p>Intentionally Blank</p> <p style="text-align: right;">C4</p>
<p style="text-align: center;">General Reading Mode Settings</p>	<p>Continuous Scan On</p>  <p>M10012_02</p> <p style="text-align: right;">D2</p>	<p>Continuous Scan Off - Default</p>  <p>M10011_01</p> <p style="text-align: right;">D3</p>	<p>Mountable Palm Charger Motion Detection - On</p>  <p>M10373_01</p> <p style="text-align: right;">D4</p>
<p>Mountable Palm Charger Motion Detection - Off</p>  <p>M10374_02</p> <p style="text-align: right;">E1</p>	<p>Anti-Glare On</p>  <p>M10352_01</p> <p style="text-align: right;">E2</p>	<p>Anti-Glare Off - Default</p>  <p>M10433_01</p> <p style="text-align: right;">E3</p>	<p>Mirroring On</p>  <p>M10125_01</p> <p style="text-align: right;">E4</p>

CR2600 Configuration Guide

NOTE: Configuration changes will take effect immediately and be saved to memory

<p>Mirroring Off - Default</p>  <p>M10124_02</p> <p>A1</p>	<p>Targeting On - Default</p>  <p>M10153_01</p> <p>A2</p>	<p>Targeting Off</p>  <p>M10154_01</p> <p>A3</p>	<p>Cell Phone Reading Enhancement On</p>  <p>M10163_01</p> <p>A4</p>
<p>Cell Phone Reading Enhancement Off - Default</p>  <p>M10162_01</p> <p>B1</p>	<p>Turn off Timestamp Prefix - Default</p>	<p>Turn on Timestamp Prefix</p>  <p>M10342_01</p> <p>B3</p>	<p>Turn off Timestamp Prefix - Default</p>  <p>M10343_02</p> <p>B4</p>
<p>Convert output to lowercase</p>  <p>M10439_01</p> <p>C1</p>	<p>Erase Prefix & Suffix Data - Default</p>  <p>M10135_01</p> <p>C2</p>	<p>Erase Prefix Data - Default</p>  <p>M10126_01</p> <p>C3</p>	<p>Erase Suffix Data - Default</p>  <p>M10130_01</p> <p>C4</p>
<p>Prefix AIM ID On</p>  <p>M10199_01</p> <p>D1</p>	<p>Prefix AIM ID Off - Default</p>  <p>M10198_01</p> <p>D2</p>	<p>Prefix Carriage Return Line Feed (RS232 Mode Only)</p>  <p>M10405_01</p> <p>D3</p>	<p>Prefix Comma</p>  <p>M10127_01</p> <p>D4</p>
<p>Prefix Space</p>  <p>M10128_01</p> <p>E1</p>	<p>Prefix Tab (USB Keyboard Mode Only)</p>  <p>M10129_01</p> <p>E2</p>	<p>Prefix Tab (RS232 Mode Only)</p>  <p>M10319_01</p> <p>E3</p>	<p>Suffix Carriage Return (RS232 Mode Only)</p>  <p>M10320_01</p> <p>E4</p>


CR2600 Configuration Guide

NOTE: Configuration changes will take effect immediately and be saved to memory

<p>Suffix Carriage Return Line Feed (RS232 Mode Only)</p>  <p>M10322_01</p> <p style="text-align: right;">A1</p>	<p>Suffix Comma</p>  <p>M10131_01</p> <p style="text-align: right;">A2</p>	<p>Suffix Enter (USB Keyboard Mode Only)</p>  <p>M10134_01</p> <p style="text-align: right;">A3</p>	<p>Suffix Line Feed (RS232 Mode Only)</p>  <p>M10321_01</p> <p style="text-align: right;">A4</p>
<p>Suffix Space</p>  <p>M10132_01</p> <p style="text-align: right;">B1</p>	<p>Suffix Tab (USB Keyboard Mode Only)</p>  <p>M10133_01</p> <p style="text-align: right;">B2</p>	<p>Suffix Tab (RS232 Mode Only)</p>  <p>M10323_01</p> <p style="text-align: right;">B3</p>	<p>Translate all Characters to Uppercase On</p>  <p>M10220_03</p> <p style="text-align: right;">B4</p>
<p>Translate all Characters to Uppercase Off - Default</p>  <p>M10426_02</p> <p style="text-align: right;">C1</p>	<p style="text-align: center;">Australian Post Off - Default</p>	<p>Australian Post On</p>  <p>M10288_02</p> <p style="text-align: right;">C3</p>	<p>Australian Post Off - Default</p>  <p>M10289_02</p> <p style="text-align: right;">C4</p>
<p>Aztec On - Default</p>  <p>M10018_01</p> <p style="text-align: right;">D1</p>	<p>Aztec Inverse On</p>  <p>M10020_01</p> <p style="text-align: right;">D2</p>	<p>Aztec Inverse & Normal On</p>  <p>M10021_01</p> <p style="text-align: right;">D3</p>	<p>Aztec Off</p>  <p>M10019_01</p> <p style="text-align: right;">D4</p>
<p>Codabar On - Default</p>  <p>M10022_01</p> <p style="text-align: right;">E1</p>	<p>Codabar Off</p>  <p>M10023_01</p> <p style="text-align: right;">E2</p>	<p>Remove Codabar Start and Stop Delimiters</p>  <p>M10537_01</p> <p style="text-align: right;">E3</p>	<p>Keep Codabar Start and Stop Delimiters - Default</p>  <p>M10538_01</p> <p style="text-align: right;">E4</p>

CR2600 Configuration Guide

NOTE: Configuration changes will take effect immediately and be saved to memory

<p>Codablock F On</p>  <p>M10027_01</p> <p>A1</p>	<p>Codablock F Off - Default</p>  <p>M10026_01</p> <p>A2</p>	<p>Code 11 On</p>  <p>M10029_02</p> <p>A3</p>	<p>Code 11 Off - Default</p>  <p>M10028_02</p> <p>A4</p>
<p>Code 11 Checksum Stripped from Result On</p>  <p>M10031_02</p> <p>B1</p>	<p>Code 32 (Italian Pharmacode) On</p>  <p>M10239_02</p> <p>B2</p>	<p>Code 32 (Italian Pharmacode) Off - Default</p>  <p>M10238_02</p> <p>B3</p>	<p>Code 39 Off</p>  <p>M10034_02</p> <p>B4</p>
<p>Code 39 On - Default</p>  <p>M10033_02</p> <p>C1</p>	<p>Code 39 Checksum On</p>  <p>M10036_01</p> <p>C2</p>	<p>Code 39 Checksum Off - Default</p>  <p>M10035_01</p> <p>C3</p>	<p>Code 39 Checksum Stripped from Result On</p>  <p>M10037_01</p> <p>C4</p>
<p>Code 39 Extended Full ASCII Off - Default</p>  <p>M10038_01</p> <p>D1</p>	<p>Code 39 Extended Full ASCII On</p>  <p>M10039_01</p> <p>D2</p>	<p>Code 49 On</p>  <p>M10458_01</p> <p>D3</p>	<p>Code 49 Off - Default</p>  <p>M10459_01</p> <p>D4</p>
<p>Code 93 On - Default</p>  <p>M10042_01</p> <p>E1</p>	<p>Code 93 Off</p>  <p>M10043_01</p> <p>E2</p>	<p>Code 128 On - Default</p>  <p>M10044_01</p> <p>E3</p>	<p>Code 128 Off</p>  <p>M10045_01</p> <p>E4</p>

CR2600 Configuration Guide

NOTE: Configuration changes will take effect immediately and be saved to memory

<p>Composite On</p>  <p>M10047_02</p> <p style="text-align: right;">A1</p>	<p>Composite Off - Default</p>  <p>M10046_01</p> <p style="text-align: right;">A2</p>	<p>Data Matrix Inverse On - Default</p>  <p>M10051_03</p> <p style="text-align: right;">A3</p>	<p>Data Matrix Inverse Off</p>  <p>M10050_03</p> <p style="text-align: right;">A4</p>
<p>Data Matrix Rectangular On & Rectangular Extended On</p>  <p>M10470_01</p> <p style="text-align: right;">B1</p>	<p>Data Matrix Rectangular On & Rectangular Extended Off - Default</p>  <p>M10049_01</p> <p style="text-align: right;">B2</p>	<p>Data Matrix Rectangular & Rectangular Extended Off</p>  <p>M10048_01</p> <p style="text-align: right;">B3</p>	<p>Grid Matrix On</p>  <p>M10535_01</p> <p style="text-align: right;">B4</p>
<p>Grid Matrix Off - Default</p>  <p>M10536_01</p> <p style="text-align: right;">C1</p>	<p>All GS1 DataBar On - Default</p>  <p>M10054_01</p> <p style="text-align: right;">C2</p>	<p>All GS1 DataBar Off</p>  <p>M10055_01</p> <p style="text-align: right;">C3</p>	<p>GS1 DataBar Limited On</p>  <p>M10056_03</p> <p style="text-align: right;">C4</p>
<p>GS1 DataBar Limited Off</p>  <p>M10354_02</p> <p style="text-align: right;">D1</p>	<p>GS1 DataBar Expanded On</p>  <p>M10059_03</p> <p style="text-align: right;">D2</p>	<p>GS1 DataBar Expanded Off</p>  <p>M10417_02</p> <p style="text-align: right;">D3</p>	<p>GS1 DataBar Expanded Stacked On</p>  <p>M10357_02</p> <p style="text-align: right;">D4</p>
<p>GS1 DataBar Expanded Stacked Off</p>  <p>M10356_02</p> <p style="text-align: right;">E1</p>	<p>GS1 DataBar Stacked and GS1 DataBar Stacked Omnidirectional On</p>  <p>M10058_03</p> <p style="text-align: right;">E2</p>	<p>GS1 DataBar Stacked and GS1 DataBar Stacked Omnidirectional Off</p>  <p>M10353_03</p> <p style="text-align: right;">E3</p>	<p>GS1 DataBar Omnidirectional and GS1 DataBar Truncated On</p>  <p>M10357_03</p> <p style="text-align: right;">E4</p>




CR2600 Configuration Guide

NOTE: Configuration changes will take effect immediately and be saved to memory

<p>GS1 DataBar Omnidirectional and GS1 DataBar Truncated Off</p>  <p>M10355_02</p> <p>A1</p>	<p>Han Xin On</p>  <p>M10248_01</p> <p>A2</p>	<p>Han Xin Off - Default</p>  <p>M10249_01</p> <p>A3</p>	<p>Hong Kong 2 of 5 Off - Default</p>  <p>M10078_02</p> <p>A4</p>
<p>Hong Kong 2 of 5 On</p>  <p>M10079_01</p> <p>B1</p>	<p>Int 2 of 5 On - Default</p>  <p>M10060_01</p> <p>B2</p>	<p>Int 2 of 5 Off</p>  <p>M10061_01</p> <p>B3</p>	<p>Int 2 of 5 Checksum Stripped from Result On</p>  <p>M10065_01</p> <p>B4</p>
<p>Int 2 of 5 Checksum On</p>  <p>M10235_01</p> <p>C1</p>	<p>Int 2 of 5 Checksum Off - Default</p>  <p>M10234_01</p> <p>C2</p>	<p>Japan Post On</p>  <p>M10292_02</p> <p>C3</p>	<p>Japan Post Off - Default</p>  <p>M10293_02</p> <p>C4</p>
<p>KIX (Dutch Post) Code On</p>  <p>M10290_02</p> <p>D1</p>	<p>KIX (Dutch Post) Code Off - Default</p>  <p>M10291_02</p> <p>D2</p>	<p>Korean Post On</p>  <p>M10358_01</p> <p>D3</p>	<p>Korean Post Off - Default</p>  <p>M10359_01</p> <p>D4</p>
<p>Maxicode On</p>  <p>M10067_02</p> <p>E1</p>	<p>Maxicode Off - Default</p>  <p>M10066_01</p> <p>E2</p>	<p>Matrix 2 of 5 On</p>  <p>M10069_01</p> <p>E3</p>	<p>Matrix 2 of 5 Off - Default</p>  <p>M10068_01</p> <p>E4</p>

CR2600 Configuration Guide

NOTE: Configuration changes will take effect immediately and be saved to memory

<p>Micro PDF417 On</p>  <p>M10073_01</p> <p style="text-align: right;">A1</p>	<p>Micro PDF417 Off - Default</p>  <p>M10072_01</p> <p style="text-align: right;">A2</p>	<p>MSI Plessey On</p>  <p>M10076_01</p> <p style="text-align: right;">A3</p>	<p>MSI Plessey Off - Default</p>  <p>M10077_01</p> <p style="text-align: right;">A4</p>
<p>NEC 2 of 5 On</p>  <p>M10082_01</p> <p style="text-align: right;">B1</p>	<p>NEC 2 of 5 Off - Default</p>  <p>M10083_01</p> <p style="text-align: right;">B2</p>	<p>PDF417 On - Default</p>  <p>M10070_01</p> <p style="text-align: right;">B3</p>	<p>PDF417 Off</p>  <p>M10071_01</p> <p style="text-align: right;">B4</p>
<p>Pharmacode On</p>  <p>M10275_02</p> <p style="text-align: right;">C1</p>	<p>Pharmacode Reverse Barcode Decoding (Right to Left)</p>  <p>M10280_02</p> <p style="text-align: right;">C2</p>	<p>Pharmacode Normal Barcode Decoding (Left to Right)</p>  <p>M10281_02</p> <p style="text-align: right;">C3</p>	<p>Pharmacode Off - Default</p>  <p>M10274_03</p> <p style="text-align: right;">C4</p>
<p>All QR Code On</p>  <p>M10101_02</p> <p style="text-align: right;">D1</p>	<p>Standard QR Code On - Default</p>  <p>M10095_04</p> <p style="text-align: right;">D2</p>	<p>All QR Code Off</p>  <p>M10351_03</p> <p style="text-align: right;">D3</p>	<p>Straight 2 of 5 On</p>  <p>M10241_01</p> <p style="text-align: right;">D4</p>
<p>Straight 2 of 5 Off - Default</p>  <p>M10240_01</p> <p style="text-align: right;">E1</p>	<p>Telepen On</p>  <p>M10103_01</p> <p style="text-align: right;">E2</p>	<p>Output Telepen as ASCII</p>  <p>M10521_01</p> <p style="text-align: right;">E3</p>	<p>Output Telepen as Numeric - Default</p>  <p>M10520_01</p> <p style="text-align: right;">E4</p>














CR2600 Configuration Guide

NOTE: Configuration changes will take effect immediately and be saved to memory

<p>Telepen Off - Default</p>  <p>M10104_01</p> <p style="text-align: right;">A1</p>	<p>Trioptic On</p>  <p>M10041_01</p> <p style="text-align: right;">A2</p>	<p>Trioptic - Enable Reverse Order option (Bit 3)</p>  <p>M10446_01</p> <p style="text-align: right;">A3</p>	<p>Trioptic - Disable Reverse Order option (Bit 3) - Default</p>  <p>M10445_01</p> <p style="text-align: right;">A4</p>
<p>Trioptic Off - Default</p>  <p>M10040_01</p> <p style="text-align: right;">B1</p>	<p>UK Plessey On</p>  <p>M10237_02</p> <p style="text-align: right;">B2</p>	<p>UK Plessey Off - Default</p>  <p>M10236_02</p> <p style="text-align: right;">B3</p>	<p>UK Royal Mail On</p>  <p>M10294_02</p> <p style="text-align: right;">B4</p>
<p>UK Royal Mail Off - Default</p>  <p>M10295_02</p> <p style="text-align: right;">C1</p>	<p>UPC Off</p>  <p>M10106_01</p> <p style="text-align: right;">C2</p>	<p>UPC On - Default</p>  <p>M10105_01</p> <p style="text-align: right;">C3</p>	<p>UPC Supplemental On</p>  <p>M10110_01</p> <p style="text-align: right;">C4</p>
<p>Transmit UPC-A Number System Off</p>  <p>M10478_01</p> <p style="text-align: right;">D1</p>	<p>UPC Supplemental Off - Default</p>  <p>M10109_01</p> <p style="text-align: right;">D2</p>	<p>Transmit UPC-A Check Digit On - Default</p>  <p>M10475_01</p> <p style="text-align: right;">D3</p>	<p>Transmit UPC-A Check Digit Off</p>  <p>M10476_01</p> <p style="text-align: right;">D4</p>
<p>Transmit UPC-A Number System On - Default</p>  <p>M10477_01</p> <p style="text-align: right;">E1</p>	<p>Convert UPC-A to EAN-13 On</p>  <p>M10490_01</p> <p style="text-align: right;">E2</p>	<p>Convert UPC-A to EAN-13 Off - Default</p>  <p>M10489_01</p> <p style="text-align: right;">E3</p>	<p>UPC-E Expansion On</p>  <p>M10108_01</p> <p style="text-align: right;">E4</p>











CR2600 Configuration Guide

NOTE: Configuration changes will take effect immediately and be saved to memory

<p>UPC-E Expansion Off - Default</p>  <p>M10107_01</p> <p>A1</p>	<p>Transmit UPC-E Check Digit On - Default</p>  <p>M10479_01</p> <p>A2</p>	<p>Transmit UPC-E Check Digit Off</p>  <p>M10480_01</p> <p>A3</p>	<p>Transmit UPC-E Number System On - Default</p>  <p>M10481_01</p> <p>A4</p>
<p>Transmit UPC-E Number System Off</p>  <p>M10482_01</p> <p>B1</p>	<p>Transmit EAN-8 Check Digit On - Default</p>  <p>M10485_01</p> <p>B2</p>	<p>Transmit EAN-8 Check Digit Off</p>  <p>M10486_01</p> <p>B3</p>	<p>Convert EAN-8 to EAN-13 On</p>  <p>M10488_01</p> <p>B4</p>
<p>Convert EAN-8 to EAN-13 Off - Default</p>  <p>M10487_01</p> <p>C1</p>	<p>Transmit EAN-13 Check Digit On - Default</p>  <p>M10483_01</p> <p>C2</p>	<p>Transmit EAN-13 Check Digit Off</p>  <p>M10484_01</p> <p>C3</p>	<p>Convert Bookland EAN-13 to ISBN On</p>  <p>M10492_01</p> <p>C4</p>
<p>Convert Bookland EAN-13 to ISBN Off - Default</p>  <p>M10491_01</p> <p>D1</p>	<p>Convert Bookland EAN-13 to ISSN On</p>  <p>M10494_01</p> <p>D2</p>	<p>Convert Bookland EAN-13 to ISSN Off - Default</p>  <p>M10493_01</p> <p>D3</p>	<p>UPU ID-Tag On</p>  <p>M10360_02</p> <p>D4</p>
<p>UPU ID-Tag Off - Default</p>  <p>M10361_02</p> <p>E1</p>	<p>USPS Intelligent Mail/IMB/4-State CB On</p>  <p>M10286_02</p> <p>E2</p>	<p>USPS Intelligent Mail/IMB/4-State CB Off - Default</p>  <p>M10287_02</p> <p>E3</p>	<p>USPS Planet On</p>  <p>M10284_02</p> <p>E4</p>




















CR2600 Configuration Guide

NOTE: Configuration changes will take effect immediately and be saved to memory

<p>USPS Planet Off - Default</p>  <p>M10285_02</p> <p>A1</p>	<p>USPS Postnet On</p>  <p>M10282_02</p> <p>A2</p>	<p>USPS Postnet Off - Default</p>  <p>M10283_02</p> <p>A3</p>	<p>Grid Matrix & Grid Matrix Inverse Decoding On</p>  <p>M10544_01</p> <p>A4</p>
<p>Grid Matrix & Grid Matrix Mirror Decoding On</p>  <p>M10545_01</p> <p>B1</p>	<p>Grid Matrix, Grid Matrix Inverse & Grid Matrix Mirror Decoding</p>  <p>M10546_01</p> <p>B2</p>	<p>GoCode & GoCode Inverse Decoding</p>  <p>M10547_01</p> <p>B3</p>	<p>GoCode & GoCode Mirror Decoding On</p>  <p>M10548_01</p> <p>B4</p>
<p>GoCode, GoCode Inverse & GoCode Mirror Decoding On</p>  <p>M10549_01</p> <p>C1</p>	<p>Code 11 Decoding with one checksum digit checked, and remove checksum from output On</p>  <p>M10550_01</p> <p>C2</p>	<p>Keyboard Language Settings</p>	<p>Keyboard Support: French Keyboard Mapping for Apple</p>  <p>M10420_02</p> <p>C4</p>
<p>Keyboard Support: USInternational (Universal) Keyboard Mapping for Windows</p>  <p>M10469_01</p> <p>D1</p>	<p>English (US) Keyboard Mapping for Windows</p>  <p>M10460_02</p> <p>D2</p>		<p>English (UK) Keyboard Mapping for Windows</p>  <p>M10471_01</p> <p>D3</p>
<p>French Keyboard Mapping for Windows</p>  <p>M10462_02</p> <p>E1</p>	<p>German Keyboard Mapping for Windows</p>  <p>M10463_02</p> <p>E2</p>	<p>Japanese Keyboard Mapping for Windows</p>  <p>M10464_02</p> <p>E3</p>	<p>Latin American Keyboard Mapping for Windows</p>  <p>M10465_02</p> <p>E4</p>


CR2600 Configuration Guide

NOTE: Configuration changes will take effect immediately and be saved to memory

<p>Spanish Keyboard Mapping for Windows</p>  <p>M10472_01 A1</p>	<p>Swiss German Keyboard Mapping for Windows</p>  <p>M10466_02 A2</p>	<p>English Keyboard Mapping for Apple</p>  <p>M10419_02 A3</p>	<p>Keyboard Support: Spanish Keyboard Mapping for Apple</p>  <p>M10424_02 A4</p>
<p>Italian Keyboard Mapping for Apple</p>  <p>M10423_02 B1</p>	<p>German-Swiss Keyboard Mapping for Apple</p>  <p>M10422_02 B2</p>	<p>German Keyboard Mapping for Apple</p>  <p>M10421_02 B3</p>	<p>Russian Keyboard Mapping for Windows</p>  <p>M10418_02 B4</p>
<p>Control Character Input - Ctrl + Character</p>  <p>M10442_01 C1</p>	<p>Control Character Input - Alt + Keypad</p>  <p>M10443_01 C2</p>	<p>Control Character Input -Alt + Leading Zero</p>  <p>M10444_01 C3</p>	<p>Control Character Input - Language - Default</p>  <p>M10441_01 C4</p>
<p>Data Encoding: Raw ASCII to Keyboard XML File Lookup - Default</p>  <p>M10514_01 D1</p>	<p>Data Encoding: UTF8 to Unicode Codepoint - Alt Sequences for Windows</p>  <p>M10515_01 D2</p>	<p>Reader (Legacy) - US English Keyboard Mapping - with Leading 0 for Non Printable ASCII - Default</p>  <p>M10411_01 D3</p>	<p>Shift-JIS Mode for Japanese Windows OS</p>  <p>M10552_02 D4</p>
<p>Shift-JIS Mode for English Windows OS</p>  <p>M10553_01 E1</p>	<p>Alternative Operating System (Linux/Mac) Off - Default</p>		<p>Alternative Operating System (Linux/Mac) On</p>  <p>M10123_02 E3</p>
			<p>Alternative Operating System (Linux/Mac) Off - Default</p>  <p>M10122_02 E4</p>

CR2600 Configuration Guide

NOTE: Configuration changes will take effect immediately and be saved to memory

<p>USB Settings (Non-Batch Mode)</p>	<p>Modem - USB Keyboard Communication Mode - Default</p>  <p>M10189_01</p> <p>A2</p>	<p>USB Downloader Mode</p>  <p>M10004_02</p> <p>A3</p>	<p>Modem - USB HID POS</p>  <p>M10007_03</p> <p>A4</p>
<p>Modem - USB Virtual COM Mode</p>  <p>M10427_01</p> <p>B1</p>	<p>Intentionally Blank</p>	<p>Reader - USB Virtual COM CDC Raw Mode</p>  <p>M10438_01</p> <p>B3</p>	<p>Intentionally Blank</p> <p>B4</p>
<p>RS232 Settings (for use with CodeXML M3 Modem Only)</p>	<p>RS232 Communication Mode</p>  <p>M10242_01</p> <p>C2</p>	<p>RS232 Interface - 9600 Baud Rate - Default</p>  <p>M10243_01</p> <p>C3</p>	<p>RS232 Interface - 19200 Baud Rate</p>  <p>M10244_01</p> <p>C4</p>
<p>RS232 Interface - 38400 Baud Rate</p>  <p>M10245_01</p> <p>D1</p>	<p>RS232 Interface - 57600 Baud Rate</p>  <p>M10246_01</p> <p>D2</p>	<p>RS232 Interface - 115200 Baud Rate</p>  <p>M10247_01</p> <p>D3</p>	<p>Intentionally Blank</p> <p>D4</p>
<p>RS232 Settings</p>	<p>Reader - Enable RS232 OPOS/IPOS</p>  <p>M10467_01</p> <p>E2</p>	<p>Reader Feedback Settings</p>	<p>Beep On Vibrate On - Default</p>  <p>M10140_01</p> <p>E4</p>

CR2600 Configuration Guide

NOTE: Configuration changes will take effect immediately and be saved to memory

<p>Beep Off Vibrate Off</p>  <p>M10143_02</p> <p style="text-align: right;">A1</p>	<p>Beep Off Vibrate On</p>  <p>M10141_02</p> <p style="text-align: right;">A2</p>	<p>Beep On Vibrate Off</p>  <p>M10142_01</p> <p style="text-align: right;">A3</p>	<p>Disable AES Encryption - Default</p>  <p>M10526_01</p> <p style="text-align: right;">A4</p>
<p>Beep Volume 100% - Default</p>  <p>M10197_01</p> <p style="text-align: right;">B1</p>	<p>Beep Volume 67%</p>  <p>M10196_01</p> <p style="text-align: right;">B2</p>	<p>Beep Volume 33%</p>  <p>M10195_01</p> <p style="text-align: right;">B3</p>	<p>Beep Volume 0%</p>  <p>M10194_01</p> <p style="text-align: right;">B4</p>
<p style="text-align: center;">Scan Delay Settings</p>	<p>Duplicate Scan Disabled - Default</p>  <p>M10144_01</p> <p style="text-align: right;">C2</p>	<p>1 Second Duplicate Scan Delay</p>  <p>M10145_01</p> <p style="text-align: right;">C3</p>	<p>2 Second Duplicate Scan Delay</p>  <p>M10146_01</p> <p style="text-align: right;">C4</p>
	<p>3 Second Duplicate Scan Delay</p>  <p>M10147_01</p> <p style="text-align: right;">D1</p>	<p>5 Second Duplicate Scan Delay</p>  <p>M10148_01</p> <p style="text-align: right;">D2</p>	<p>10 Second Duplicate Scan Delay</p>  <p>M10149_01</p> <p style="text-align: right;">D3</p>
<p>1 Hour Duplicate Scan Delay</p>  <p>M10151_01</p> <p style="text-align: right;">E1</p>	<p>1 Day Duplicate Scan Delay</p>  <p>M10152_01</p> <p style="text-align: right;">E2</p>	<p style="text-align: center;">Power Settings</p>	<p>Power Off in 1 Hour</p>  <p>M10316_01</p> <p style="text-align: right;">E4</p>

CR2600 Configuration Guide

NOTE: Configuration changes will take effect immediately and be saved to memory

<p>Power Off in 2 Hour</p>  <p>M10317_01</p> <p>A1</p>	<p>Power Off in 4 Hours</p>  <p>M10318_01</p> <p>A2</p>	<p>Miscellaneous Settings</p>	<p>Read Both Wide and High Density Field - Default</p>  <p>M10190_01</p> <p>A4</p>
<p>Read High Density Field Only</p>  <p>M10183_01</p> <p>B1</p>	<p>Read Wide Field Only</p>  <p>M10182_01</p> <p>B2</p>		<p>Enable AES Encryption</p>  <p>M10525_01</p> <p>B3</p>
<p>Top Button Take Picture</p>  <p>M10339_01</p> <p>C1</p>	<p>Locked Reader Accept Host Commands - Default</p>  <p>M10527_01</p> <p>C2</p>	<p>Locked Reader Reject Host Commands</p>  <p>M10528_01</p> <p>C3</p>	<p>Allow Wireless Switching on a Locked Reader - Default</p>  <p>M10533_01</p> <p>C4</p>
<p>Prevent Wireless Switching on a Locked Reader</p>  <p>M10534_01</p> <p>D1</p>	<p>Modem ID and Firmware Version</p>	<p>Reader ID and Firmware Version</p>  <p>M10157_01</p> <p>D3</p>	<p>Modem ID and Firmware Version</p>  <p>M10158_01</p> <p>D4</p>
<p>Reader Text Commands On</p>  <p>M10137_01</p> <p>E1</p>		<p>Reader Text Commands Off - Default</p>  <p>M10136_01</p> <p>E2</p>	<p>Reset, Clear and Save Reader Settings</p>

CR2600 Configuration Guide

NOTE: Configuration changes will take effect immediately and be saved to memory

<p>Clear All JavaScript Rules</p>  <p>M10139_02</p> <p style="text-align: right;">A1</p>	<p>Clear All Stored Data and Images</p>  <p>M10138_02</p> <p style="text-align: right;">A2</p>	<p>Save All Reader Settings - Default</p>  <p>M10159_01</p> <p style="text-align: right;">A3</p>	<p>Reboot Reader</p>  <p>M10296_01</p> <p style="text-align: right;">A4</p>
<p>Intentionally Blank</p> <p style="text-align: right;">B1</p>	<p>Intentionally Blank</p> <p style="text-align: right;">B2</p>	<p>Intentionally Blank</p> <p style="text-align: right;">B3</p>	<p>Intentionally Blank</p> <p style="text-align: right;">B4</p>
<p>Intentionally Blank</p> <p style="text-align: right;">C1</p>	<p>Intentionally Blank</p> <p style="text-align: right;">C2</p>	<p>Intentionally Blank</p> <p style="text-align: right;">C3</p>	<p>Intentionally Blank</p> <p style="text-align: right;">C4</p>
<p>Intentionally Blank</p> <p style="text-align: right;">D1</p>	<p>Intentionally Blank</p> <p style="text-align: right;">D2</p>	<p>Intentionally Blank</p> <p style="text-align: right;">D3</p>	<p>Intentionally Blank</p> <p style="text-align: right;">D4</p>
<p>Intentionally Blank</p> <p style="text-align: right;">E1</p>	<p>Intentionally Blank</p> <p style="text-align: right;">E2</p>	<p>Intentionally Blank</p> <p style="text-align: right;">E3</p>	<p>Intentionally Blank</p> <p style="text-align: right;">E4</p>