



# User's Manual

[www.bradyid.com/labxpert](http://www.bradyid.com/labxpert)



## Copyright

---

This manual is copyrighted with all rights reserved. No portion of this manual may be copied or reproduced by any means without the prior written consent of Brady Corporation.

While every precaution has been taken in the preparation of this document, Brady assumes no liability to any party for any loss or damage caused by errors or omissions or by statements resulting from negligence, accident, or any other cause. Brady further assumes no liability arising out of the application or use of any product or system described, herein; nor any liability for incidental or consequential damages arising from the use of this document. Brady disclaims all warranties of merchantability of fitness for a particular purpose.

### ***Trademarks***

LABXPERT™ is a trademark of Brady Corporation.

Font Fusion™ is a registered trademark of Bitstream®.

Brady reserves the right to make changes without further notice to any product or system described herein to improve reliability, function, or design.

© 2005 Brady Corporation. All Rights Reserved.

Revision A, 1/2005

Firmware Version 1.0

Brady Corporation  
6555 West Good Hope Road  
P.O. Box 2131  
Milwaukee, WI 53201

Main Switchboard:	(800) 541-1686 (414) 358-6600
FAX:	(800) 292-2289
Sales/Customer Support:	(800) 537-8791

## Regulatory Information

---

**Note:** This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his/her own expense.

The user is cautioned that any changes or modifications not expressly approved by Brady Worldwide could void the user's authority to use the equipment.

This Class A digital apparatus meets all requirements of the Canadian Interference-Causing Equipment Regulations

Cet appareil numérique de la classe A respecte toutes les exigences du Règlement sur le matériel brouilleur du Canada.

This is a Class A product. In a domestic environment this product may cause radio interference, in which case the user may be required to take adequate measures.

## Brady Warranty

---

Brady products are sold with the understanding that the buyer will test them in actual use and determine for him or herself their adaptability to his/her intended uses. Brady warrants to the buyer that its products are free from defects in material and workmanship, but limits its obligations under this warranty to replacement of the product shown to Brady's satisfaction to have been defective at the time Brady sold it. This warranty does not extend to any persons obtaining the product from the buyer.

THIS WARRANTY IS IN LIEU OF ANY OTHER WARRANTY, EXPRESS OR IMPLIED INCLUDING, BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, AND OF ANY OTHER OBLIGATIONS OR LIABILITY ON BRADY'S PART. UNDER NO CIRCUMSTANCES WILL BRADY BE LIABLE FOR ANY LOSS, DAMAGE, EXPENSE OR CONSEQUENTIAL DAMAGES OF ANY KIND ARISING IN CONNECTION WITH THE USE, OR INABILITY TO USE, BRADY'S PRODUCTS.

## Technical Support

---

Choose one of the following options to contact system support provided by Brady Corporation:

### U.S. and Canada

Phone: (800) 643-8766, Monday - Friday 7:00 a.m. - 6:00 p.m. (CST).

Fax: (414) 358-6767.

E-Mail: [tech\\_support@bradycorp.com](mailto:tech_support@bradycorp.com).

Assistance is available 24 hours per day / 7 days per week. Go to: [www.bradyid.com](http://www.bradyid.com), and then select **Knowledge Base** from the left-hand panel.

### Belgium / Luxembourg / The Netherlands

Phone: +32 52 457 397

Fax: +32 52 457 800

E-Mail: [tsbelgium@bradycorp.com](mailto:tsbelgium@bradycorp.com)

### France

Phone: +33 169.296 717

+800 907 107

Fax: +33 169 296 718

E-Mail: [tsfrance@bradycorp.com](mailto:tsfrance@bradycorp.com)

### Italy

Phone: +39 02 96 28 60 14

Fax: +39 02 96 70 08 82

E-Mail: [tsitaly@bradycorp.com](mailto:tsitaly@bradycorp.com)

### Germany / Austria / Switzerland

Phone: +49 6103 75 98 451

Fax: +49 6103 7598 670

E-Mail: [tsgermany@bradycorp.com](mailto:tsgermany@bradycorp.com)

### UK / Ireland

Phone: +44 1295 228 205

Fax: +44 1295 27 17 55

E-Mail: [tsuk@bradycorp.com](mailto:tsuk@bradycorp.com)

### Sweden / Norway / Finland/Denmark

Phone: 46 85 90 057 30

Fax: 46 85 90 818 68

E-Mail: [tssweden@bradycorp.com](mailto:tssweden@bradycorp.com)

### Mexico

Phone: 01 800 112 7239

Fax: 52 55 5527 55 86

E-Mail: [bradymexico@bradycorp.com](mailto:bradymexico@bradycorp.com)

### Brazil

Phone: 55 11 3604 7729/7715

Fax: 55 11 3686-5236

E-Mail: [brady\\_service\\_brazil@bradycorp.com](mailto:brady_service_brazil@bradycorp.com)

### Latin America & Caribbean

Phone: (414) 438-6868

Fax: (414) 438-6870

E-Mail: [bradyintl@bradycorp.com](mailto:bradyintl@bradycorp.com)

### Africa

#### Israel

#### Middle East

#### Turkey

### Eastern Europe

#### Greece

#### Portugal

#### Malta

#### Russia

### Spain

Phone: +33 437 245 234

Fax: +33 472 74 45 54

E-Mail: [tsspain@bradycorp.com](mailto:tsspain@bradycorp.com)

Phone: +32 52 457 937

Fax: +32 52 457 800

E-Mail: [tsbelgium@bradycorp.com](mailto:tsbelgium@bradycorp.com)

## Table of Contents

<b>CHAPTER 1 INTRODUCTION.....</b>	<b>1</b>
PACKAGE CONTENTS .....	1
PRODUCT REGISTRATION.....	1
ABOUT THE USER’S MANUAL .....	1
TECHNICAL SPECIFICATIONS .....	2
CERTIFICATION .....	3
SAFETY INFORMATION.....	3
<b>CHAPTER 2 PRINTER COMPONENTS .....</b>	<b>4</b>
KEYPAD LAYOUT .....	4
BATTERY COMPARTMENT.....	4
CONNECTIONS.....	5
ACCESSORIES FOR YOUR LABXPERT™ LABORATORY LABELING SYSTEM.....	5
MATERIAL CARTRIDGES .....	6
<b>CHAPTER 3 GETTING STARTED .....</b>	<b>7</b>
SETTING UP THE PRINTER.....	7
<b>CHAPTER 4 USING THE DISPLAY SCREEN, MENU, AND KEYPAD .....</b>	<b>9</b>
THE DISPLAY SCREEN.....	9
MENU BASICS .....	9
MENU SELECTIONS .....	10
GUIDE TO KEYS.....	11
<b>CHAPTER 5 CREATING AND PRINTING LABELS.....</b>	<b>13</b>
CREATING A BASIC LABEL.....	13
FONT SIZES.....	14
SYMBOLS.....	15
INTERNATIONAL CHARACTERS .....	16
PRINTING LABELS .....	16
<b>CHAPTER 6 FORMATTING LABELS USING MENU CHOICES.....</b>	<b>17</b>
SETTING VIAL SIZE .....	17
SETTING LEGEND JUSTIFICATION .....	18
ROTATING LEGENDS .....	19
<b>CHAPTER 7 GENERAL SETTINGS.....</b>	<b>20</b>
SETTING THE TIME/DATE STAMP.....	20
PRINTING THE TIME/DATE STAMP .....	22
SETTING UNITS.....	22
SETTING MENU LANGUAGE .....	23
<b>CHAPTER 8 ADVANCED FEATURES .....</b>	<b>24</b>
CONTINUOUS MEDIA.....	24
SERIALIZED LABELS.....	25
BARCODE LABELS.....	27
MULTI-ZONE LABELS .....	28
PC CONNECTIVITY / PERIPHERAL MODE.....	32

<b>CHAPTER 9</b>	<b>MEMORY .....</b>	<b>33</b>
	SAVING A LABEL TO MEMORY .....	33
	RECALLING A LABEL FROM MEMORY .....	33
	DELETING A LABEL FROM MEMORY .....	34
<b>CHAPTER 10</b>	<b>MAINTENANCE.....</b>	<b>35</b>
	CLEANING .....	35
	ACCESSORY PARTS LIST .....	36
<b>CHAPTER 11</b>	<b>TROUBLESHOOTING .....</b>	<b>37</b>
	TROUBLESHOOTING GUIDE.....	37
	ERROR MESSAGES.....	38
<b>APPENDIX A</b>	<b>MENU TREE.....</b>	<b>39</b>
<b>APPENDIX B</b>	<b>FONT SIZE CHART .....</b>	<b>40</b>
<b>APPENDIX C</b>	<b>SYMBOL LIBRARY .....</b>	<b>42</b>
<b>APPENDIX D</b>	<b>GLOSSARY OF TERMS.....</b>	<b>44</b>

## Chapter 1 Introduction

---

This chapter contains introductory information about the LABXPRT™ Laboratory Labeling System as well as information about the User's Manual.

### Package Contents

Before you begin setting up the printer, verify that you have received the following items in your packaging:

- ❑ LABXPRT™ Printer
- ❑ A/C Power Supply
- ❑ Free Media Cartridge: XSL-86-461
- ❑ PC Communication Cable
- ❑ Printed Quick Start Guide – 4 languages
- ❑ Product CD containing:
  - Quick Start Guide
  - Sample Label Tutorial
  - User's Manual
  - Printer Driver
  - Link to Product Registration/Warranty

### Save Your Packaging

The packaging surrounding your LABXPRT™ printer should be saved in the event of any future shipments of the printer and accessories.

### Product Registration

Register your LABXPRT™ Laboratory Labeling System on-line at <http://www.bradycorp.com/register>.



---

**WARNING:** *Never ship the LABXPRT™ printer without first removing the alkaline batteries and disengaging the print head.*

---

### About the User's Manual

This manual contains information on the features, functions, and maintenance requirements for the LABXPRT™ Laboratory Labeling System. Important information found in this manual is marked as follows:



---

**WARNING:** *May cause physical injury. May also cause damage to equipment and data loss.*

---



---

**Note:** *Helpful additional information and tips for use.*

---

## Additional User Documentation

### *Quick Start Guide*

Do you want to create and print a label fast? See the LABXPRT™ *Quick Start Guide*, included with your printer, for basic instructions on creating and printing labels.

### *Sample Label Tutorial*

Do you want to practice creating and printing labels? See the LABXPRT™ *Sample Label Tutorial*, included on the product CD for this printer.

## Technical Specifications

The LABXPRT™ printer has the following physical and environmental characteristics:

### *Physical Specifications*

	<b>Metric</b>	<b>U.S.</b>
<b>Dimensions</b>	190.5 x 241.3 x 88.9 mm	7.5" x 9.5" x 3.5"
<b>Weight—Printer only</b>	.77 kg	1.70 lbs.
<b>Weight—Printer and Cartridge</b>	.98 kg	2.15 lbs.
<b>Weight—Printer and Batteries</b>	.91 kg	2 lbs.
<b>Weight—Printer, Cartridge, and Batteries</b>	1.11 kg	2.45 lbs.

### *Environmental Specifications*

	<b>Operation</b>	<b>Storage</b>
<b>Temperature*</b>	4° to 40° C (40° to 105° F)	-18° to 60° C (0° to 140° F)
<b>Relative Humidity</b>	20% to 95% (non-condensing)	10% to 80% (non-condensing)

\*Exposing the LABXPRT™ printer to direct sunlight is not recommended.

POWER: Six AA 1.5V  Alkaline Batteries or AC Adapter 9V ; 3.3A.



## Certification

The LABXPERT™ Laboratory Labeling System complies with the following:

- FCC Part 15 Class A
- ANSI/UL 60950
- CAN/CSA-C22.2 No. 60950
- NOM-019-SCFI-1998
- EN 55024
- EN55022 Class A
- EN60950
- AS/NZS 3548 Industry Canada ICES-003 Issue 3

## Safety Information



---

**WARNING:** Please heed the following precautions before setting up and using your LABXPERT™ Laboratory Labeling System:

---

- Do not immerse the printer or A/C adaptor in water. Doing so may cause electrical shock.
- Avoid exposing the printer to unusually high levels of heat and humidity.
- Do not attempt to use batteries other than those recommended in this manual.

## Chapter 2 Printer Components

This chapter provides the locations and descriptions of the components that make up the LABXPERT™ printer.


### Keypad Layout

The LABXPERT™ Laboratory Labeling System is available in standard QWERTY keyboard layout style.



### Battery Compartment

1. Material Cartridge
2. Cutting Lever
3. Locking Lever
4. LCD Screen
5. Keypad
6. Battery Compartment
7. Battery Cover

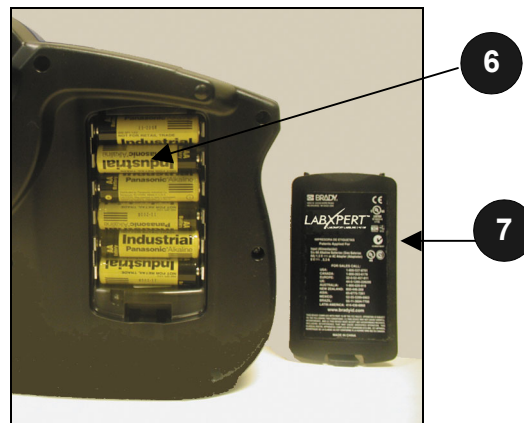

## Connections



---

***Note:** Connections are found on the top of the printer.*

---

## Accessories for your LABXPERT™ Laboratory Labeling System

These accessories may be ordered from your Brady distributor:



---

***Note:** See also the **Accessory Parts List** on page 36.*

---

- Hard Side Carrying Case
- PC Communication Cable
- A/C Adaptor
- Cleaning Kit

## Material Cartridges

Thanks to innovative smart-cell technology, the LABXPRT™ printer recognizes the label material and automatically adjusts to it, saving setup time and effort.



**Note:** Most label formatting default settings are based on the cartridge installed in the printer. Please see the chapters on formatting later in this manual for information on changing the default settings.

### Cartridges available for your LABXPRT™ Laboratory Labeling System

Material	Description	Applications
B-461	Self-laminating Polyester	Extremely low profile material for self-laminating vial, tube, and slide ID. <i>Withstands liquid nitrogen (-195° C), freezer (-80° C), autoclave, hot water bath, and centrifuge. Low profile prevents jamming in racks and centrifuge.</i>
B-427	Self-laminating Vinyl	Self-laminating vial, tube, slide, straw, and bottle ID. <i>Withstands liquid nitrogen (-195° C), and freezer (-80° C).</i>
B-488	Chemical Resistant Matte Polyester	Chemical-resistant label for slides, plates, bottles, and general laboratory ID. <i>Withstands Xylene, DMSO, Ethanol, freezer (-80° C), autoclave, and hot water bath.</i>
B-490	White Polyester Freezerbondz™	Adheres to frozen surfaces including vials, glass, and polypropylene stored in liquid nitrogen. <i>Note: When applying, material should wrap around to re-touch itself.</i>
B-499	Nylon Cloth	Permanent adhesive – for general laboratory ID, vial, tube, slide, bottle, and box ID. <i>Withstands liquid nitrogen (-195° C), freezer (-80° C), and autoclave.</i>
B-498	Vinyl Cloth	Repositionable adhesive – for general laboratory ID, vial, tube, slide, bottle, and box ID. <i>Withstands freezer (-80° C).</i>
B-351	Tamper-evident Vinyl Seals	Security ID for bottles, vials, test tubes, well plates, boxes, and general lab applications requiring evidence of tampering.

## Chapter 3 Getting Started

---

This chapter provides instructions on setting up your LABXPERT™ printer and creating a basic label. Refer to the following chapter for details on how to use the keypad and menu.


### Setting up the printer

Follow these steps to set up your printer prior to creating your first label.

#### Step 1. Install batteries or connect to power

To insert six AA alkaline batteries (not included),

1. Remove the battery cover located on the backside of the printer.
2. Install the batteries as shown. See inside the battery compartment for the battery-positioning grid.
3. Close the battery compartment.

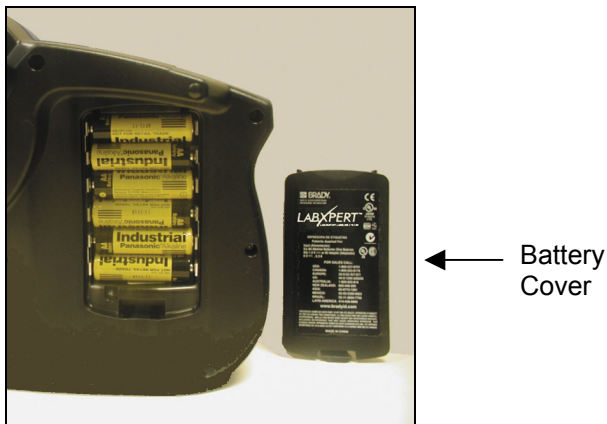

---

**Note:** You can print up to 650 labels between battery changes.

---

The LABXPERT™ printer can also be powered by use of the **A/C adaptor** provided with your printer. See the Connections section on page 5.

#### Step 2. Replace material cartridge



---

**Note:** Make sure to cut off any excess label material before removing an existing cartridge.

---

Your printer ships with a cartridge installed. Follow the instructions on the next page to replace the existing cartridge.

1. Turn the locking lever down to unlock the cartridge.
2. Locate the *cartridge release button* on the backside of the printer and push firmly to eject cartridge.
3. Remove the existing cartridge.
4. Install the new cartridge as shown.
5. Turn the locking lever up to lock both the cartridge and print head.



Locking Lever

**Step 3. Turn the printer ON.**  
Press the **POWER** key.



## Chapter 4 Using the Display Screen, Menu, and Keypad

---

This chapter provides information about the display screen and menu. It also provides information on the keys found on the LABXPRT™ printer and their corresponding functions.

### The Display Screen

When the Power button is pressed, the display screen appears.





The display allows you to see up to three lines of text and 16 characters per line. The display auto-scrolls when you enter more than the maximum displayed lines or characters. Use the arrows on your keypad to navigate the screen.

### Status Bar

The status bar, located on the bottom of the display, indicates the current text line, font size, and label zone.

### Contrast

In order to change the contrast on the display, press **MENU** and then:

- Press **FUNCTION** +  to *darken*.
- Press **FUNCTION** +  to *lighten*.

### Menu Basics

This section provides basic instructions on using the menu as well as an overview of the menu selections. Use the menu and related softkeys to perform many of the label formatting commands.



---


**Note:** See *Chapter 6 Formatting Labels Using Menu Choices* for more information.  
Also See *Appendix A Menu Tree*.

---

To access the menu:


**Step 1.** Press **MENU**.

When the **MENU** key is pressed, a series of menu choices appears. The gray softkeys correspond to the menu choices shown on the screen.

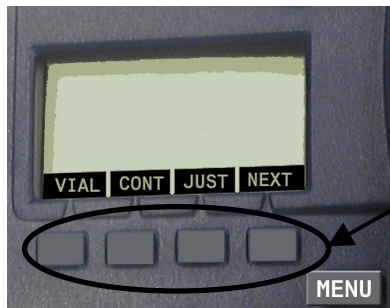

SOFTKEYS

**Step 2. Press [NEXT] to advance to the next set of menu choices:**

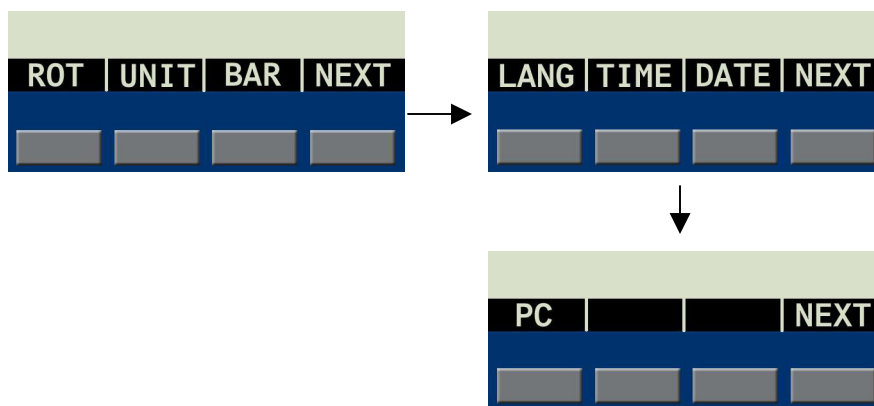

Pressing [NEXT] again cycles back to the first set of menu choices when the last menu choice is reached.

**Step 3. Press [CLEAR/ESC] to either back up to the previous menu level, or exit menu mode and return to the display screen.**



## Menu Selections

To perform types of formatting, press [MENU] and the corresponding softkey. Following is a list of the *high-level* menu selections and the corresponding softkey:

Menu Selection	Softkey
<b>Vial</b> – Choose from available sizes of .6 ml, 1.5 ml, 1.8 ml, 2-4 ml, 15 ml, and 50 ml, and AUTO. <b>Note:</b> To clear a previously set vial size, select <b>AUTO</b> from the Vial menu.	[VIAL]
<b>Continuous</b> – Choose AUTO for label length that is determined by font size and characters entered, LEN (length) to enter specific length, or SEP (separator) to enter option of NONE, TIC, or LINE.	[CONT]
<b>Justify</b> – Set horizontal and vertical justification of legend.	[JUST]
<b>Rotate</b> – Set rotation of legend to 0, 90, 180, or 270 degrees.	[ROT]
<b>Units</b> – Change units (to inches, millimeters, or points) for displaying label and font sizes.	[UNIT]
<b>Barcode</b> – Add Code 39 or Code 128 barcodes.	[BAR]
<b>Set Time</b> – Set the time to print a real-time stamp on your label.	[TIME]
<b>Set Date</b> – Set the date to print a real-time date stamp on your label.	[DATE]
<b>Language</b> – Change the default language.	[LANG]

See *Appendix A , Menu Tree* for a listing of submenus related to each section.



## Guide to Keys



**POWER** – powers on the printer.

Press the POWER button again to power off the printer. The printer automatically shuts off after 10 minutes of non-use.

---



**FUNCTION** – accesses a secondary function or character when pressed along with the desired key.

*A secondary function or character is shown in yellow on each button.*

---



**ARROW** – adjusts cursor positioning by one character or one line.

**FUNCTION + ARROW** – adjusts cursor positioning to the first or last character position or line.

---



**ENTER** – creates a new line when typing text.

Pressing ENTER confirms menu selection when in MENU mode.

---



**DELETE** – clears the character immediately behind the cursor position.

**FUNCTION + CLEAR / ESC** – brings up two choices on the display screen:

**Clear Text?** – Select this to clear the text only.

**Clear All?** – Select this to clear all text and formatting, including font size.

*When in MENU mode, the Clear/Esc function backs out of the menu. This works the same whether or not you use it in conjunction with the Function key.*

---



**PRINT** – prints one copy of the legend.

**FUNCTION + MULTI-PRINT** – prints up to 99 copies of the legend.

---



**FONT SIZE** – displays font size and allows font size changes through softkeys.

*See Appendix B Font Size Chart.*

Also toggles BOLD on/off.

---



**MENU** – toggles through softkey menu options and displays additional soft key choices.

---



**FEED** – feeds material through the printer without printing. Use for fixed length continuous labels in order to advance the label strip to the cut position.

---



**MEMORY** – accesses Save, Recall, and Delete softkeys used to store legends.

**FUNCTION + BAR CODE** – toggles between text and barcode mode.

---




















**SERIAL** – performs a standard serialization of the character on which the cursor is placed. A serialization results in a series of legends that is incremented by one number (0-9) and/or one letter (A-Z, a-z).

**FUNCTION + SYMBOL** – accesses the symbol library.

*See Appendix C, Symbol Library.*

---

	<p><b>SPACE</b> – creates a space between characters when creating legends.</p> <p><b>FUNCTION</b> +  – toggles CAPS on and off.</p>
	<p><b>FUNCTION</b> +  – brings up a selection of international characters. Use either the softkey or keypad arrows to navigate the character menu.</p>
	<p><b>FUNCTION</b> +  – navigates to the previous zone when entering text and when viewing or editing previously entered text on continuous or die-cut labels, in pre-defined zones. When using a zone that is not pre-defined, this functions only for viewing or editing previously entered text.</p>
	<p><b>FUNCTION</b> +  – navigates to the next zone when entering text and when viewing or editing previously entered text on continuous or die-cut labels, in pre-defined zones. When using a zone that is not pre-defined, this only functions for viewing or editing previously entered text.</p>
	<p><b>FUNCTION</b> +  then entering the character – enables formatting of the entered character to display and print as superscript.</p>
	<p><b>FUNCTION</b> +  then entering the character – enables formatting of the entered character to display and print as sub-script.</p>
	<p><b>FUNCTION</b> +  – enables insertion of the time by hour and minute or in 12/24 hour format. Note: Pressing <b>FUNCTION</b> + the fourth softkey while in the TIME menu toggles lock/unlock access for changing the time.</p>
	<p><b>FUNCTION</b> +  – enables insertion of the date by day, month, and year (current date appears by default). Note: Pressing <b>FUNCTION</b> + the fourth softkey while in the DATE menu toggles lock/unlock access for changing the date.</p>
	<p><b>FUNCTION</b> +  – not functional; reserved for future use.</p>

## Chapter 5 Creating and Printing Labels

This chapter provides information on creating and printing labels, including information on changing font sizes and bold status. It also provides instructions for adding symbols and international characters to a label.

### Creating a Basic Label

Follow these steps to create and print a basic label. For details and information on advanced features, refer to the following chapters of this manual.




**Note:** See the *LABXPERT™ Sample Label Tutorial* for step-by-step instructions on creating a variety of labels.

Step 1. Press POWER.



Step 2. Press FONT SIZE.



The display screen shows the current font size and bold status.

Step 3. Use the up/down arrow softkeys – or the arrows on your keypad – to select a font size. [▲] [▼]



**Note:** See the *Font Size Chart* on page 40.

Step 4. Press the [BOLD] softkey to toggle bold ON or OFF.



Step 5. Press ENTER.

Step 6. Type Text. Press ENTER after each line of text.



**Note:** You may also select from a list of symbols to include on your label. See the *Symbol Library* on page 42.



Step 7. Press PRINT.

For multiple copies, press FUNCTION + PRINT/MULTI-PRINT.



Step 8. Pull the cutter lever down to cut the label.

## Font Sizes

Fonts are available in these point sizes: 4, 6, 7, 10, 13, 20, 26, 38, 45, 51, 76, and 102. Symbols and numbers can also be printed in these font sizes. The LABXPRT™ Laboratory Labeling System also offers a 126 pt. (1.25", 31.75mm) font for uppercase characters only.



*Note: Refer to Appendix B Font Size Chart to view samples of the available font sizes.*

### Default Font Size

When a cartridge is loaded and the unit is turned on, the LABXPRT™ printer reads the label size information stored in the smart-cell. This information is used to automatically set an initial font size for your label. The method used to set this default is intended to help approximate an optimal starting point for sizing your text.

For continuous printed labels (banners), the default font size is the largest font that prints on the selected marker width in horizontal orientation.

### Changing the Font Size




The maximum font size selectable for a particular label line depends on several factors including label size, number of characters of text entered on the label line, number of lines of text entered on the label, and the font sizes chosen for the label lines.

The printer allows a maximum of 50 characters per line and 24 lines per label. These limits are dependent on factors such as number and type of characters, font size, and label type.

To set or change a font size:

1. Press . The font size and bold status appear on the display screen.





2. Press the up/down arrow softkeys – or the arrows on your keypad [] [] – to select a size.
3. Press .

Once the font is set for a label line, the size remains the same for any new lines that follow, and remains at the size you choose until you decide to change it.

If you attempt to enter too many characters on a label line, you will receive this error message: *Cannot Fit*. To allow more characters to fit on the line, you must decrease the font size.

### Creating Boldface Text

Boldface text is created on a line-by-line basis. To create a boldface line of text:

1. Place your cursor anywhere in the line of text.
2. Press .
3. Press [**BOLD**]. Pressing the **BOLD** softkey toggles bold on and off on a line-by-line basis. When **BOLD** is toggled to ON, it stays bold until OFF is selected.
4. Press .

## Symbols

The LABXPERT™ Laboratory Labeling System offers a variety of symbols in these categories: Refer to *Appendix C, Symbol Library* for a list of symbols available for printing within each category.


- Greek Symbols
- Laboratory Symbols
- PPE/Mandatory
- Hazard Warning
- Prohibition
- First Aid/Fire
- Hazardous Materials (WHMIS)
- Hazardous Materials (HSID)
- Arrows/Misc.

To select a symbol:



1. Place your cursor anywhere in the line of text.


2. Press  + .

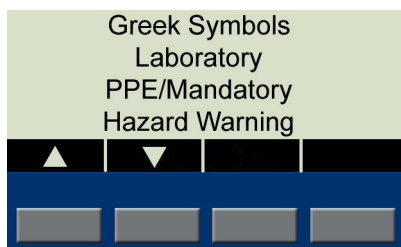3. A list of symbol categories appears on the display screen:



Use the up/down arrow softkeys – or the arrows on your keypad [▲] [▼] – to scroll through the symbol categories.

4. Press  to select the desired symbol category.  
The symbols appear, one at a time, for the category selected.
5. Press the up/down arrow softkeys – or the arrows on your keypad [▲] [▼] – to scroll through the symbols in the selected category.
6. Press  to select the desired symbol.

The symbol will appear on the display screen at the current cursor position. Some symbols will appear as a generic character symbol  on the display, but will appear as intended when printed.

Symbols can be printed in all font sizes. See the section on *Font Sizes* on page **14** for instructions on changing font sizes.

## International Characters

The LABXPRT™ Laboratory Labeling System offers these international characters corresponding to the 10 non-English languages offered.




### International Characters—Upper Case

À	Á	Â	Ã
Ä	Å	Æ	Ç
È	É	Ê	Ë
Ì	Í	Î	Ï
Ñ	Ò	Ó	Ö
Ø	Ô	Õ	œ
Ù	Ú	Û	Ü
Û	Ý	Ÿ	Ž


### International Characters—Lower Case

à	á	â	ã
ä	å	æ	ç
è	é	ê	ë
ì	í	î	ï
ñ	ò	ó	ô
õ	ö	ø	œ
ù	ú	û	ü
Û	ý	ÿ	ž

To select an international character:

1. Press  + . A selection of international characters appears on the display screen.
2. Press either the softkey or keypad arrows to navigate the character menu.
3. When the desired character is reached, press . The selected international character is inserted in the cursor position.



## Printing Labels


To print **one copy** of a label, press .



**Note:** If your label cartridge runs out of labels before the print job is completed, the print job will be aborted. You will need to initiate a new print job to continue printing the remaining labels.

To print **multiple copies** of a label:

1. Press  + . A prompt appears asking you to enter how many copies are needed.
 

No. of Copies? 1
2. Enter a number between 1 and 99.
3. Press .

## Chapter 6 Formatting Labels Using Menu Choices

This chapter provides information on the formatting options available through the LABXPRT™ menu. See **Menu Basics** on page 9 for general menu use instructions.



**Note:** Most label formatting default settings are based on the cartridge installed in the printer.



**Note:** In the instruction in this and other sections, softkey choices will be named in brackets. For example, if you are to press the Vial softkey, you will be instructed to “Press [VIAL]”. This means that you should press the gray softkey just below VIAL.





### Setting Vial Size

The LABXPRT™ Laboratory Labeling System allows printing of vial labels, including multiple put-up (vial/vial top) labels (see **Chapter 8, Advanced Features** for multi-zone label details). Vial labels can be created using any continuous media; the length is automatically determined by the vial size chosen.

To create a vial label:

1. Press **MENU**.
2. Press the [VIAL] softkey.
3. Press a vial size softkey, or [NEXT] for more size options.

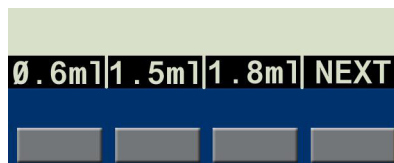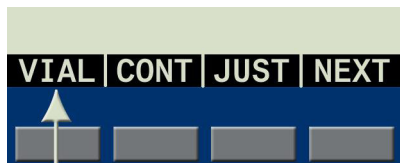

4. Pressing [NEXT] advances to the next set of vial size options:
5. Pressing [NEXT] again advances to the [AUTO] option. Selecting [AUTO] will clear a previously set vial size.



6. Make a vial size selection, then press **ENTER**.



**Note:** You may also change a previously set vial size by selecting menu option [CONT], then selecting [AUTO], then selecting a new vial size under the [VIAL] menu.

## Setting Legend Justification

Use the menu selections to justify your legends horizontally or vertically. Selections for each type of justification are as follows:

Horizontal			Vertical		
123	123	123	123	123	123
Left	Center	Right	Top	Center	Bottom

To justify your legend,

1. Press **MENU**.
2. Press the **[JUST]** softkey.



The following menu options appear:



- For *horizontal* justification, press **[HORIZ]**, then **[LEFT]**, **[CENT]**, or **[RIGHT]**.
- For *vertical* justification, press **[VERT]**, then **[TOP]**, **[CENT]**, or **[BOT]**.

3. Press **ENTER**.



**Note:** The LABXPRESS™ printer allows you to specify justification within separate zones. See **Chapter 8, Advanced Features** for more information.





## Rotating Legends


Use the Menu selections to rotate your legends 0, 90, 180, or 270 degrees.

To rotate your legend:


1. Press **MENU**.
2. Press the **[NEXT]** softkey.
3. Press the **[ROT]** softkey.

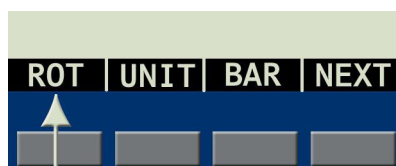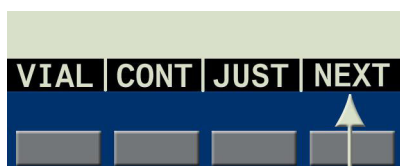

The following menu options appear:

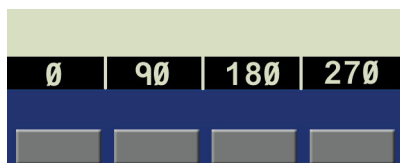


The display shows the current rotation setting.

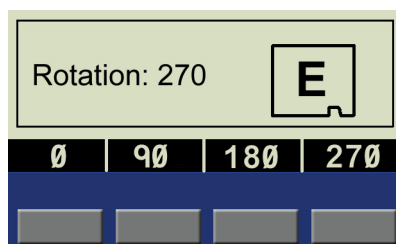

4. Press **[0]**, **[90]**, **[180]**, or **[270]**.
5. Press **ENTER**.

### Examples:

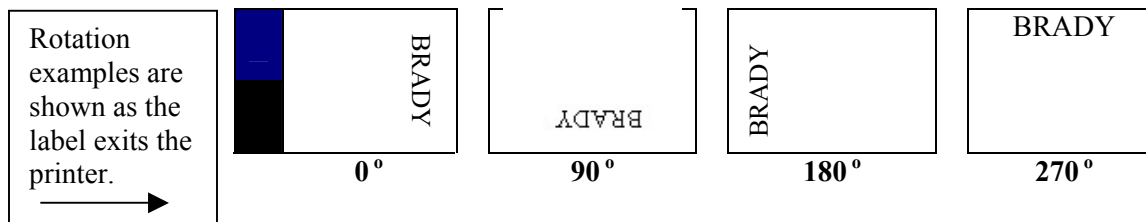

**Note:** The LABXPERT™ printer allows you to specify rotation within separate zones in a multi-zone label. See **Chapter 8, Advanced Features** for more information.


## Chapter 7 General Settings


---

This chapter provides information on general settings. Settings for the LABXPRT™ printer are set using the menu and corresponding softkeys.


### Setting the Time/Date Stamp

The printer allows you to print a real time and/or date field on your labels. First you must set the time and date on the printer. To set the **time**:

1. Press .
2. Press the [NEXT] softkey *twice*.
3. Press the [TIME] softkey.

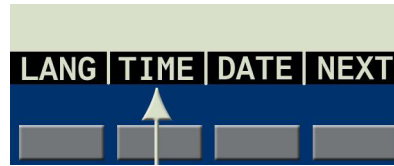

The following menu options appear, allowing you to set the time by hour and minute, or by 12/24 format.

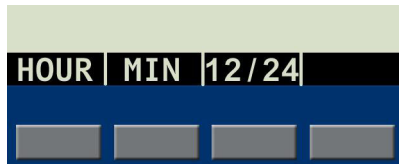

The display shows the current time setting.



- Pressing the [HOUR] softkey scrolls to the correct hour and pressing [MIN] scrolls to the correct minute.
- Pressing [12/24] toggles in and out of 12/24 format.

4. Press  to set the entered time.



**Note:** Pressing *FUNCTION* + the fourth softkey while in the [TIME] menu toggles lock/unlock access for changing the time.


---

To set the **date**:

1. Press **MENU**.
2. Press the **[NEXT]** softkey *twice*.
3. Press the **[DATE]** softkey.



The following menu options appear, allowing you to set the day, month, and year.

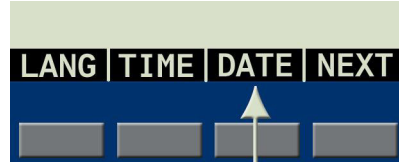

The display shows the current date setting.



4. Press the following softkeys to cycle to the correct month, day, or year:
  - [DAY]** – cycles to the correct day.
  - [MON]** – cycles to the correct month.
  - [YEAR]** – cycles to the correct year.

5. Press .





---

**Note:** Pressing *FUNCTION* + the fourth softkey while in the **[DATE]** menu toggles lock/unlock access for changing the date.

---



## Printing the Time/Date Stamp

### Print Time

To print the time stamp, press  +  (Insert Time). If the time stamp fits on your label, the time symbol ⌚ appears in the place in which you have your cursor. If it does not fit, you will receive this error message: *Cannot Fit*.

The time prints on your label (Hour/Minute or 12/24 format), for example, 9:30 PM or 21:30.

### Print Date

To print the date stamp, press  +  (Insert Date). If the date stamp fits on your label, the date symbol 📅 appears in the place in which you have your cursor. If it does not fit, you will receive this error message: *Cannot Fit*.

The date prints on your label in dd/MON/yy format. For example, 22/OCT/05.




**Note:** The time and date stamp reflects real time. Therefore, the time and date printed on a label reflects the time at **printing**.



## Setting Units

The printer allows you to view both label measurements and font sizes in a variety of units. To change default units:


1. Press .
2. Press the [NEXT] softkey.
3. Press the [UNIT] softkey.

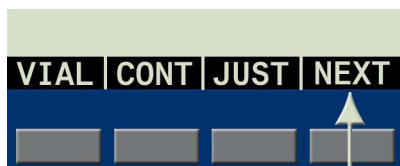

The following menu options appear:

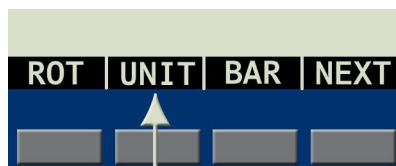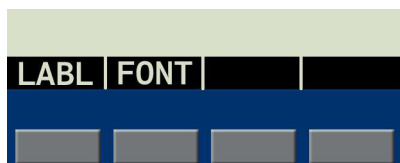

The display shows the current unit settings.

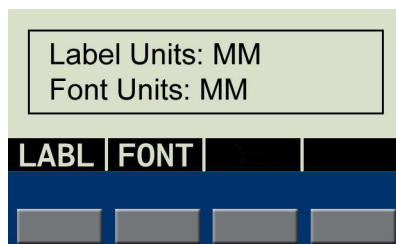



- To change the default unit for *label measurements*, press [LABL], then press [INCH], or [MM].
- To change the default unit for fonts, press [FONT], then press [POINT], [INCH], or [MM]. Inches, millimeters, and points refer to the *height* of a character.

4. Press .


## Setting Menu Language

The printer allows you to view menu choices in eleven different languages. To set the default language:

1. Press **MENU**.
2. Press the **[NEXT]** softkey *twice*.
3. Press the **[LANG]** softkey.

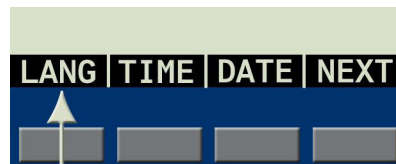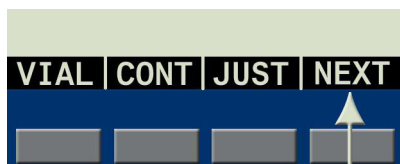

The display shows the current language setting.

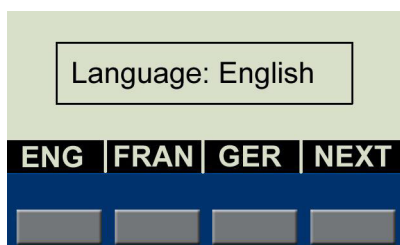

4. Select your default language.

To select this language	Press
English	<b>[ENG]</b>
French	<b>[FRE]</b>
German	<b>[GER]</b>
Dutch	<b>[DUT]</b>
Italian	<b>[ITAL]</b>
Portuguese (Brazilian)	<b>[PORT]</b>
Spanish	<b>[SPAN]</b>
Danish	<b>[DAN]</b>
Finnish	<b>[FIN]</b>
Norwegian	<b>[NOR]</b>
Swedish	<b>[SWE]</b>

5. Press **ENTER**.



**Note:** All menu prompts and messages will be displayed in the language selected.

## Chapter 8 Advanced Features


This chapter provides information on creating and printing continuous labels (both automatic and fixed length), serialized labels, barcode labels, and multi-zone labels.

### Continuous Media


The LABXPRT™ Laboratory Labeling System allows you to set label length for continuous media and to insert separators between continuous media labels.

To set label length and add separators:

1. Press **MENU**.
2. Press the **[CONT]** softkey.

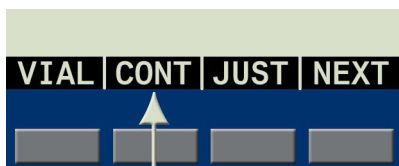

The following menu options appear:

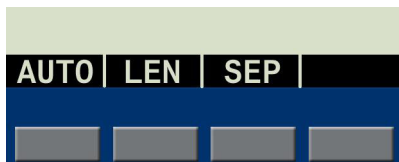

- Choose **[AUTO]** to have the specified font size and characters determine label length automatically (up to a maximum of 50 characters or 19 in. (482mm), whichever is reached first. The default value is **[AUTO]**).
- Choose **[LEN]** (length) to enter a specific length in the popup window. Minimum length is .2" (5mm); Maximum length is 19" (482mm).



**Note:** To set a specific length in inches, type two places after the decimal point. For example, to set a length of .2", **type 20**. You do not need to type the decimal point.

- Choose **[SEP]** (separator) to enter the option of **[NONE]**, **[TIC]**, or **[LINE]**. The default value is **[NONE]**.

**Examples:**

Line Separation

123	124	125	126
-----	-----	-----	-----

Tic Separation

123	124	125	126
-----	-----	-----	-----



3. Press **ENTER**.

## Serialized Labels

The printer allows you to perform basic alpha or numeric serializations. Serializing a character results in a series of labels that increment the character by either one number or one letter. For example:


<i>Numeric</i> Serialization when the serialized character is <b>3</b> .	123, 124, 125, 126...
<i>Alpha</i> Serialization when the serialized character is <b>C</b> .	ABC, ABD, ABE, ABF...

To create labels containing serialized data:

1. Enter the text to be serialized on the desired legend line.
2. Use the arrows on your keypad (right/left) to position the cursor under the character in the legend to be serialized.
3. Press . The screen prompts you to enter the number of times to increment the serial number.
4. Enter the number of times to increment the serial number.
5. Press . The screen prompts you to enter the number of *copies* of the serialization to print.

The following example shows 2 *copies* of a numeric serialization when the serialized character is 3:

126	126	125	125	124	124	123	123
-----	-----	-----	-----	-----	-----	-----	-----

6. Enter the number of copies.
7. Press .




---

**Note:** To serialize multi-zone labels, go to **Multi-Zone Labels** on page 30.

---

## General Guidelines for Serialization

Following are general guidelines for serializing:

- Both lowercase and uppercase characters can be serialized.
- Serialized characters can be incremented only (cannot decrement).
- Serialized text is limited to one line and one sequence per label.
- The printer first serializes the character the cursor is highlighted on when  is pressed. When this character reaches its maximum value (9, z, or Z), the character immediately to the left is incremented, and the right most character cycles back to its minimum value (0, a, or A).
- Once a serialized character has reached its maximum value and the next character encountered to the left is a non-serializable character (such as a space, accented character, or symbol), the serial pattern cycles back to begin incrementing again from the rightmost serialized character.
- After printing a series of serial characters, the display screen shows the next logical character in the serial pattern (example: Print 1 to 5. After print job is completed, screen displays 6).




## Barcode Labels

The printer allows you to print Code 39 and Code 128 barcode labels. Barcode heights are available in inches or millimeters.

**Human Readable** – Text in 10-point font size can be toggled on or off. The human readable text will be centered and positioned below the barcode.

Barcodes are selectable on a line-by-line basis. Text and barcodes cannot be combined on the same line.

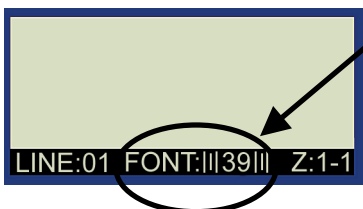


A barcode symbol in the status bar (on the display screen) indicates that a line is designated as a barcode.


To designate a line or lines as a barcode, press  + . Pressing this combination again toggles the barcode function off.





**Note:** There are some data types such as symbols that cannot be entered or printed while in barcode mode. If you try to enter this type of information while in barcode mode, you will receive this error message: Invalid Character.

To change barcode symbology, height, and human readable attributes:


1. Press .
2. Press the [NEXT] softkey.
3. Press the [BAR] softkey.

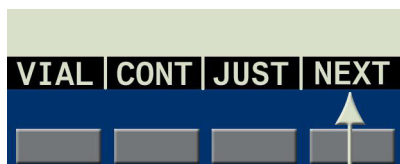

The following menu options appear:

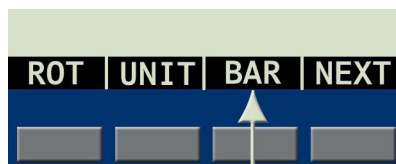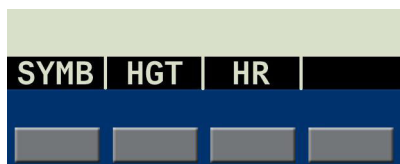

The display shows the current barcode settings.

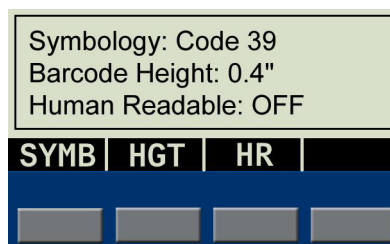

Choose from the following options:

- **[SYMB]** (Symbology)  
Select 39 (check digit on/off), or 128.
- **[HGT]** (Height)  
Available barcode heights range from .1" to 1.2". Pressing the up and down softkey arrows raises and lowers barcode height in .1" increments.



**Note:** To change the barcode height **unit** type (inches vs. millimeters), you must change the label units. See **Setting Units** on page 22.

- **[HR]** (Human Readable)  
Select ON or OFF (HR Font Size = 10 pt.)




4. Press . When you print the label, the line(s) designated as barcode will print as such (if HR has been selected, the text will be centered below).

## Multi-Zone Labels

The multi-zone label feature works with specific die-cut label media, for instance, a *Lab Vial Side and Top* cartridge such as *X-98-499*. Once you install the appropriate cartridge, the printer will recognize it and allow you to create and format multi-zone labels.


### Multi-Zone Label Example

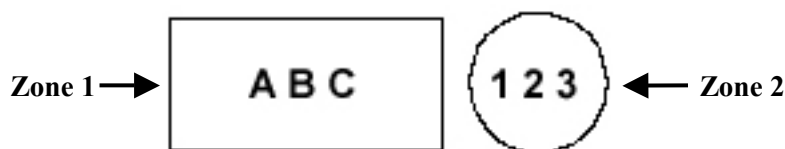

**Note:** *Continuous* and *Vial* modes are disabled when die-cut label media is installed. If you have continuous label media installed, the printer will not recognize entry of multi-zone commands. See **Glossary of Terms** on page 44 for complete definitions.


### To create a multi-zone label:

1. Install a multi-zone (die-cut label) cartridge.

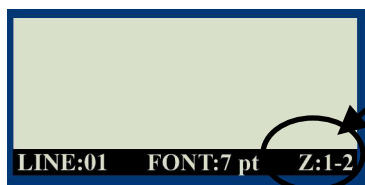


The display will show that you are in **Zone 1 of 2**.

2. Enter characters for **Zone 1**.

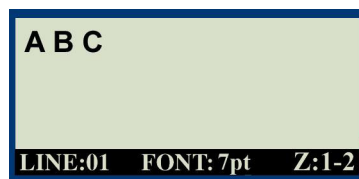

3. Press + .

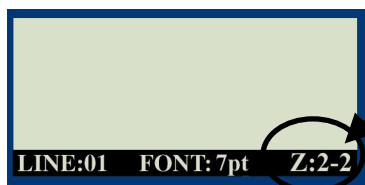

The display will show that you are in **Zone 2 of 2**.

4. Enter characters for **Zone 2**.

**Note:** Pressing + toggles back to **Zone 1**.




5. Press .

### To set justification of a legend within a multi-zone label:

You may set legend justification within individual zones. For instance, the following example shows **Zone 1** with vertical TOP and horizontal LEFT justification; **Zone 2** shows vertical CENTER and horizontal CENTER justification.



Before setting justification, note the zone you are in as indicated in the lower right corner of the display.

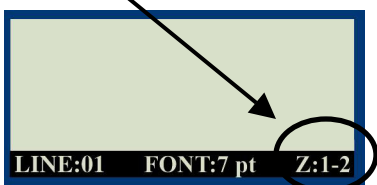

---

**Note:** Pressing **FUNCTION** + **9** PREV ZONE and **FUNCTION** + **0** NEXT ZONE toggles between zones.

---

1. Press **MENU**.
2. Press the **[JUST]** softkey.



The following menu options appear:



- For *horizontal* justification, press **[HORIZ]**, then **[LEFT]**, **[CENT]**, or **[RIGHT]**.
- For *vertical* justification, press **[VERT]**, then **[TOP]**, **[CENT]**, or **[BOT]**.

3. Press .

4. Navigate to the next or previous zone (see **Note** above) and repeat Steps 1–3.



---

**Note:** Go to **Setting Legend Justification** on page 18 to see how selected settings will appear and print.


---

### To set rotation of a legend within a multi-zone label:

You may set legend rotation within individual zones. For instance, the following example shows **Zone 1** with a 0 degree rotation; **Zone 2** shows a 270 degree rotation.





Before setting rotation, note the zone you are in as indicated in the lower right corner of the display.

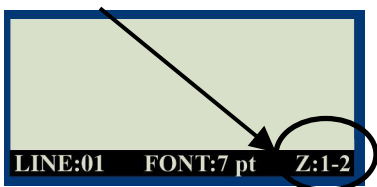


**Note:** Pressing **FUNCTION** + **9** PREV ZONE and **FUNCTION** + **0** NEXT ZONE toggles between zones.

1. Press **MENU**.
2. Press the **[NEXT]** softkey.
3. Press the **[ROT]** softkey.

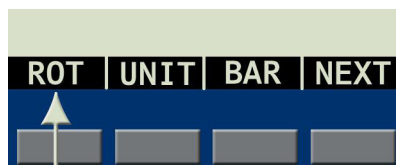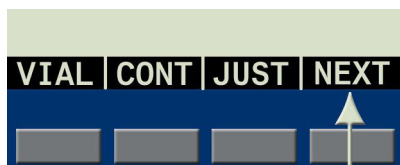

The following menu options appear:

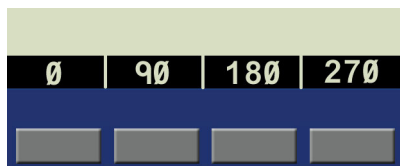





4. Press **[0]**, **[90]**, **[180]**, or **[270]**.
5. Press **ENTER**.
6. Navigate to the next or previous zone (see **Note** above) and repeat Steps 1–5.







**Note:** Go to **Rotating Legends** on page 19 to see how selected rotation settings will appear and print.

### To serialize a multi-zone label:


The printer allows you to perform basic alpha or numeric serializations within any one zone in a multi-zone label. Note the following:

- The serialization cannot occur within more than one zone per label.
- When performing multiple-zone serialization, the zone you are in when you select  is the zone that will serialize.
- Ensure that all text and characters are entered into all zones before pressing  from the zone (and specified character) you want serialized, as this will start the serialization and printing process.
- If you must back out of the serialization process, press  +  to return to the zone you were last in.

To create multi-zone labels containing serialized data:

1. Enter text into all zones on the label.
2. Go to the zone you wish to create the serialization in and using the arrows on your keypad   (right/left) highlight the character you want serialized.
3. Press . The screen prompts you to enter the number of times to increment the serial number (or character).
4. Press . The screen prompts you to enter the number of *copies* of the serialization to print.

The following example shows 2 *copies* of a numeric serialization in Zone 2 (of two zones) when the serialized character is 3:

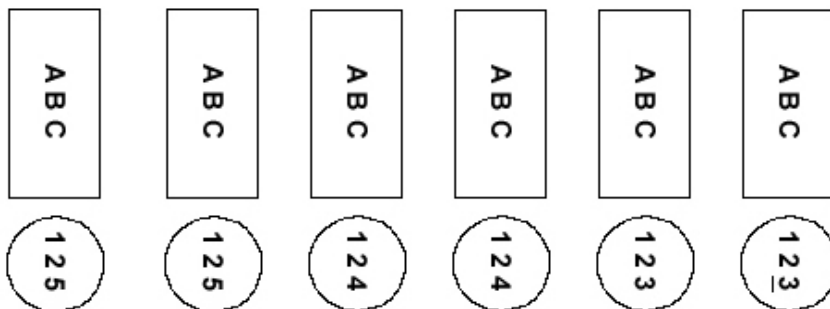

5. Enter the number of copies.

6. Press .



**Note:** See *Serialized Labels* on page 25 and *General Guidelines for Serialization* on page 26 for more information.


## PC Connectivity / Peripheral Mode

To connect your printer to a PC, use the Driver Installation link on the printer CD. Then do the following:

1. Press **MENU**.
2. Press the **[NEXT]** softkey *three* times.
3. Press the **[PC]** softkey.



The display shows the following:

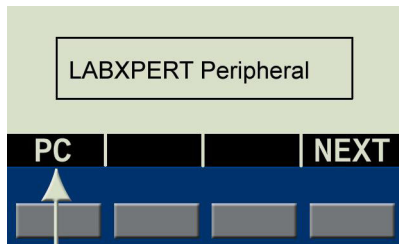

4. Install compatible software, i.e., IdentiLab™ or CodeSoft™ (all LABXPert™ cartridge label formats can be selected from these programs).
5. To exit Peripheral (PC) mode, press **[DELETE]**.

## Chapter 9 Memory

This chapter provides information on saving, retrieving, and deleting labels using the memory function.



**Note:** You can create, recall, edit, and save labels on your LABXPERT™ Laboratory Labeling System without a cartridge. Labels are created and saved based on the attributes of the last cartridge installed.

### Saving a Label to Memory

You may save up to ten labels and then recall them for future use.

To **save** a label to memory:

1. Press .


A grid appears showing the **10 storage locations**. A **bold** number indicates a storage location is occupied. Additionally, the first line of text and part name are displayed for easy retrieval of the correct label.

1	2	3	4	5
6	7	8	9	<b>10</b>
xc-1500-580				
12				
SAVE   RCL   DEL				

2. Use the arrows on your keypad – [▲] [▼] – to navigate to the desired storage location on the grid.
3. Press [SAVE]. If you try to save the legend to an occupied space, you will get the option to overwrite it.

### Recalling a Label from Memory

To **recall** a label from memory:

1. Press . A grid appears showing the **10 storage locations** (see above). A **bold** number indicates a storage location is occupied.
2. Use the arrows on your keypad – [▲] [▼] – to navigate to the desired storage location on the grid. The part number (cartridge) – along with the first line of label text – shows in the display to help you identify the saved legend.
3. Press [RCL].



**Caution:** Pressing Recall will delete any text you have currently showing on the display screen.




**Note:** You must have a part number in the printer that is equal to or greater than (in print width and height) the part that was used when saving the legend. If the part number is too small, you will receive this error message: Cannot Fit

*If you save a label using a new part number, it will be saved with the new part.*

## Deleting a Label from Memory

To **delete** a label from memory:

1. Press . A grid appears showing the **10 storage locations** (see above). A **bold** number indicates a storage location is occupied.
2. Use the arrows on your keypad – [▲] [▼] – to navigate to the desired storage location on the grid. The first line of label text shows in the display to help you identify the saved legend.
3. Press [DEL]. A message appears asking if you are sure you want to delete the label.
4. Press [YES].
5. Press **FUNCTION** + **CLEAR/ESC** to exit the memory function.





## Chapter 10 Maintenance

This chapter provides instructions on cleaning your LABXPRT™ Laboratory Labeling System as well as an accessories list.

### Cleaning

Follow these instructions to keep your printer running at optimal performance.

1. Remove Label Cartridge.
2. Use a cotton swab moistened with isopropyl alcohol and thoroughly wipe the following:





**WARNING:** Make sure you use a foam swab (with black handle) provided in your cleaning kit. See the **Accessories Parts List** on page 36.



**WARNING:** Make sure to wait five minutes after cleaning so the printer is dry before installing a cartridge.

- a. Print head – **Try cleaning the print head with a dry swab first.** Wipe the **print line** (black) area only. Do not wipe the green area.
- b. Deflector plate – This is located above the print head, to the right of the platen roller. **See Illustration B on the following page.**
- c. Label exit slot – Make sure to wipe the breaker bar located on the **inside** of the label exit slot. The cutter blade meets the breaker bar when a label is cut.

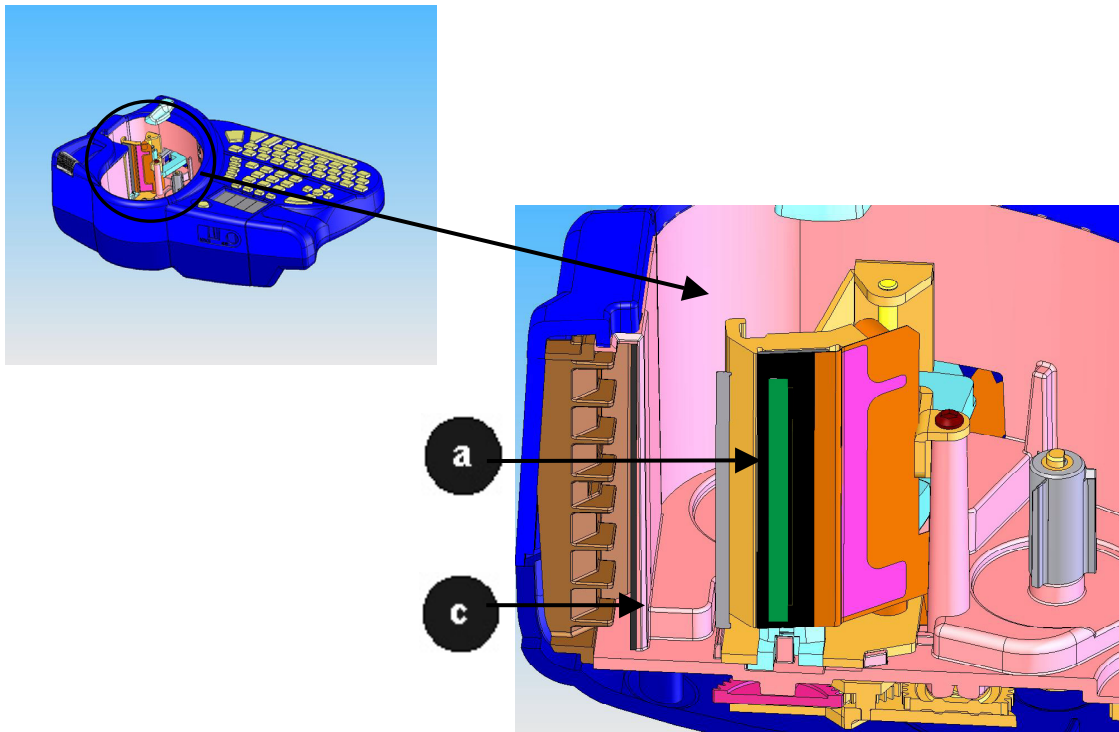

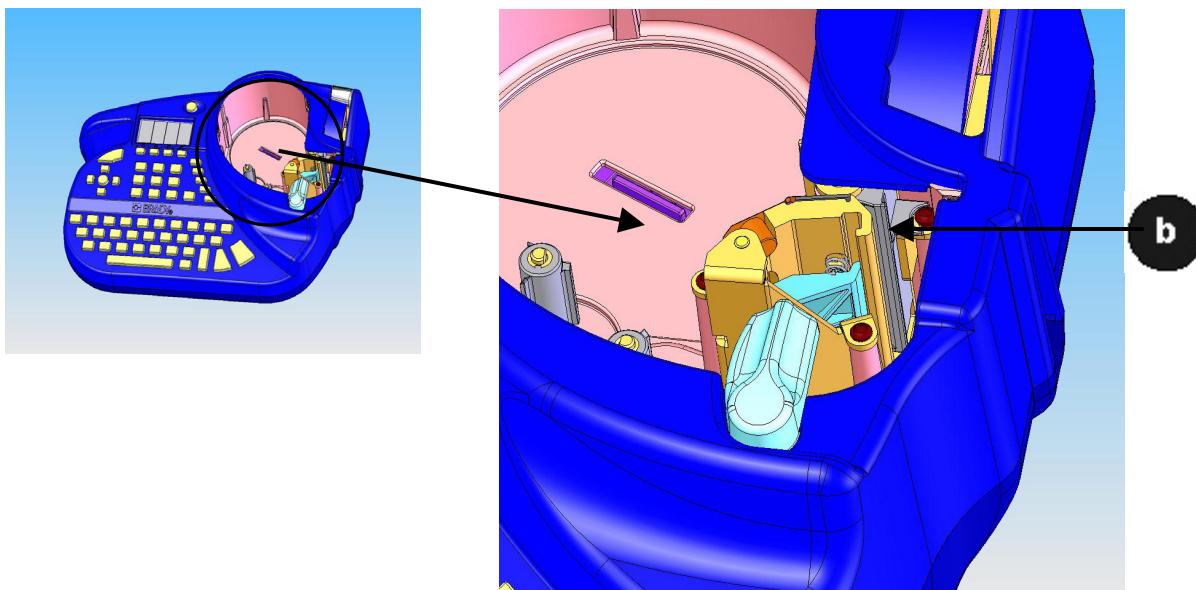

### Accessory Parts List

Description	Catalog No.	*UPC Part No.
Hard side Carrying Case	LABXPRT-HC-KEY	60902
AC Adapter – North America	XPRT-AC	60544
AC Adapter – Europe	XPRT-ACEUR	60545
AC Adapter – UK	XPRT-ACUK	60546
PC Communication Cable	PCCABLE-1	18574
Cleaning Kit	PCK-4	33969

**\*North America Only**

## Chapter 11 Troubleshooting

If your LABXPERT™ Laboratory Labeling System is not performing as documented in this user's manual, use the following troubleshooting and error message guides to determine the corrective action you should take. If the corrective action does not work, contact Brady's Technical Support Group.

### Troubleshooting Guide

Symptom	Cause	Corrective Action
Poor quality printing.	The print head and platen roller are dirty.	Clean the printer. See <b><i>Cleaning</i></b> on page 35.
	Battery power is low.	Replace batteries.
	Wrinkled media.	Press <b>FEED</b> .
Printer does not power up when turned on.	Dead Batteries	Replace batteries.
	No Batteries	Insert batteries.
	A/C adaptor not plugged in.	Ensure A/C adaptor is plugged into a proper outlet.
Printer will not feed labels. <i>Continued.</i> ↓	The leading edge of the media roll is uneven or torn (not a straight edge).	Use a pair of scissors to cut a straight leading edge on the marker roll.




**WARNING:** When cutting die-cut labels, make sure to cut in between labels. For continuous media, cut just before a notch. **DO NOT** cut into the notch!

	The leading edge of the media roll is either out past the cartridge edge or has retracted back into it.	Ensure that the medial roll edge is flush with edge of cartridge <b>and</b> under the material guides.
	Notch edges may be folded. Printer is not detecting a notch in the media.	Fold left edge back up so that the notch can be read.
Label material has retracted into cartridge.	Excessive jarring during transportation of material.	Ensure that retention label is reapplied when storing the cartridge.
Fixed length label text gets cut off.	<b>FEED</b> was not pressed before cutting.	Press <b>FEED</b> to move the fixed length label to the cut position.
Label material jams in printer.	Retaining label was not removed.	Remove retaining label from cartridge before inserting into printer.

## Error Messages

Error Message	Cause	Corrective Action
Head Open	The printer head mechanism is not engaged.	Lock the cartridge locking lever.
Out of Labels	The printer label cartridge is empty.	Install a new label cartridge. See <b><i>Replace material cartridge</i></b> on page 7.
No Cartridge Installed	A cartridge is not inserted into printer.	Install a label cartridge. See <b><i>Replace material cartridge</i></b> on page 7.
Cannot Fit	The printable information will not fit on current label.	Either reduce the font size of the legend, or use a larger label size.
	The legend rotation was changed and the existing text will no longer fit.	Reduce the font size of the legend, change the rotation, or use a larger label size.
	The currently installed label is too small for legend retrieval.	Install a cartridge containing larger labels. See <b><i>Replace material cartridge</i></b> on page 7.
Invalid Label	The printer cartridge is not valid.	Install a new label cartridge. See <b><i>Replace material cartridge</i></b> on page 7.
Invalid Character	This character cannot be used in the current printer mode. For example, you cannot enter a symbol when in barcode mode.	Either use a different character or switch printer mode. For example, toggle out of barcode mode.

## Appendix A Menu Tree

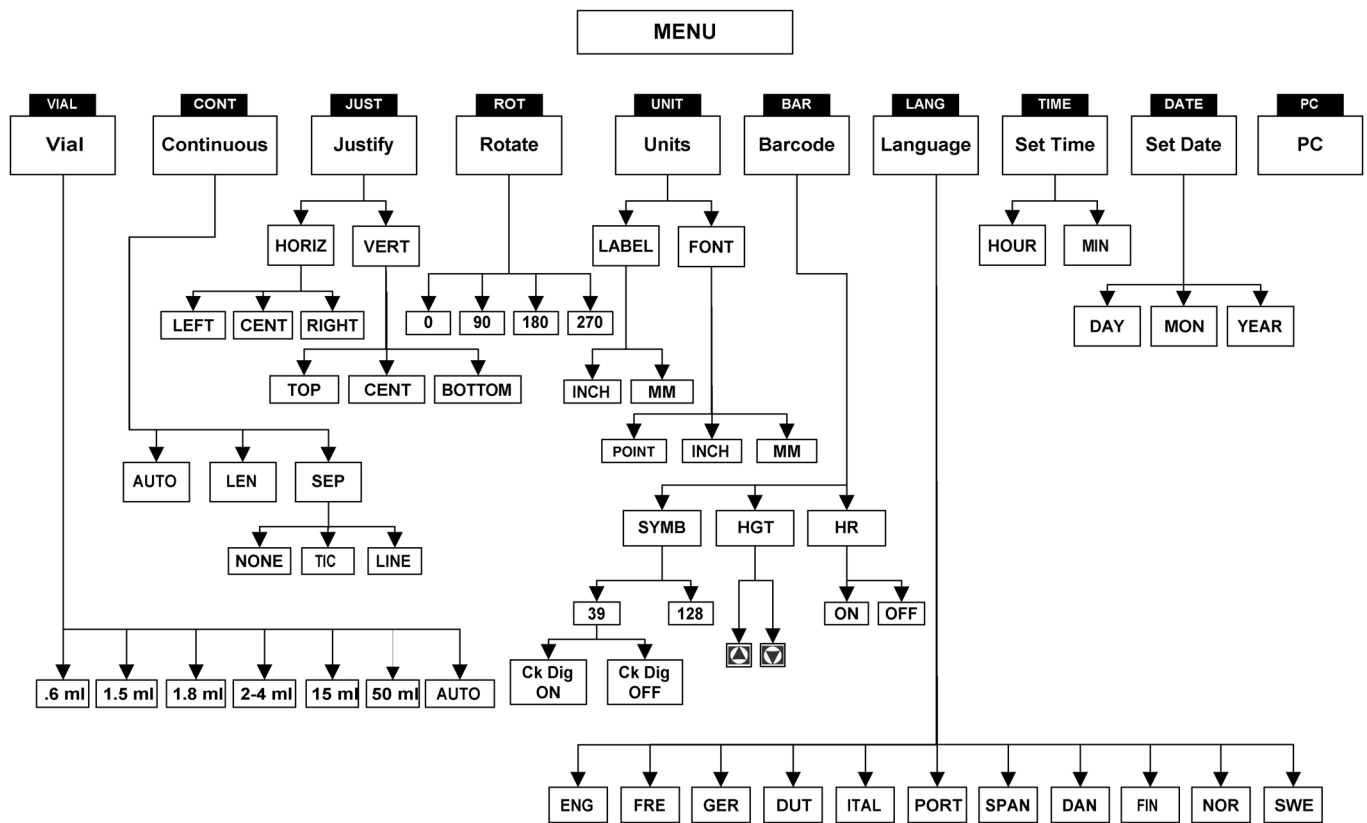

## Appendix B Font Size Chart

Point Size	Inch	mm	PRINT SAMPLE
4	.04	1	BRADY 12345
6	.05	1.4	BRADY 12345
7	.06	1.5	BRADY 12345
10	.10	2.5	BRADY 12345
13	.13	3.3	BRADY 12345
20	.20	5.1	BRADY 12345
26	.25	6.4	BRADY 12345
38	.38	9.6	BRADY 12324
45	.45	11.0	BRADY 12345
51	.50	13.0	BRADY 12345
76	.75	19.0	BRADY 1
102	1.00	25.0	BRADY



Point Size	Inch	mm	PRINT SAMPLE
126	1.25	33.0	BRAD

## Appendix C Symbol Library

See the section on *Symbols* on page 15 for instructions on selecting and printing the symbols shown below:

### Greek Symbols







































































$\alpha$	$\beta$	$\mu$	$\rho$	$\Sigma$	$\Upsilon$	$\Delta$	$\lambda$
$\Omega$	$\sigma$	$\pi$	$\theta$	$\psi$	$\Lambda$	$X$	

### Laboratory Symbols


### PPE/Mandatory


### Hazard Warning




Prohibition							
							
First Aid/ Fire							
							
Haz Mat's (WHMIS)							
							
Haz Mat's (HSID) <i>European</i>							
							
Arrows/ Misc.							
							
							
							
							

## Appendix D Glossary of Terms

---

It may be helpful to review these terms while using this manual:

**Cartridge (Material Cartridge)** – The cartridge containing the label material, ribbon, and smart-cell.

**Continuous Media (Labels)** – Marking media in a continuous roll, *not* pre-cut or separated by spaces and notches.

**Die Cut Labels** – Marking media that is pre-cut and separated into individual markers by spaces and notches.

**Label** – Once a marker contains printed text, it is referred to as a label.

**Legend** – The actual text to be printed on a marker. The legend appears on the LCD screen and can be stored in memory.

**Marker** – A blank label. Until a label is actually printed, the material is referred to as a marker. Markers are available in a variety of sizes.

**Serialize** – To automatically print labels in a numeric or alphabetical sequence.

**Multi-Zone Label** – A label containing more than one area (zone) for entering alpha or numeric text and characters. The zones can be navigated and edited separately.